

PERFORMANCE TRUCK - HOUSTON

6855 North Loop 610 East, Houston, Texas 77028

Phone: (713) 844-7111

BUYER'S ORDER

Date Prepared: 01-21-2015	Delivery Date: 03-15-2016	Salesman: Preston Fredrich	Branch: Houston
Purchaser: Fort Bend County Drainage		Telephone: 281-342-2863 Fax:	
Mailing Address: 1124 Blume Road City: Rosenberg State: TX Zip: 77471			County: Fort Bend
Physical Address: 1124 Blume Road City: Rosenberg State: TX Zip: 77471			County: Fort Bend
Description: NEW 2016 KENWORTH T880			
Mileage:	Color: WHITE White	NOTE: Buy Board Contract # 430-13	
VIN: TO ORDER Comments: See attached vehicle summary, quote ID # Q11935042			
Purchaser's Agent: Steve Korenek		Title: Supervisor	License Type: Apportioned Account # Fort Bend County

LICENSE - TITLE INFORMATION

Months: 0	Tractor:	Truck: X	Trailer:	Body Type: DUMP	Color: WHI	Tons:	GCW: 54600
Apportioned: X	IMC #	Combination:	Com'l:	Token Trailer:	Gas:	Diesel: X	

INSURANCE INFORMATION

AGENCY:	SELLING PRICE	128,903.03
NAME:	BUYBOARD FEE	400.00
PHONE:	CASH PRICE W/ACCESS.	129,303.03
LIEN INFORMATION		
NAME:	TRADE IN ALLOWANCE	-
LIEN DATE:	NET CASH DIFFERENCE	129,303.03
ADDRESS:	FEDERAL RETAIL EXCISE TAX	-
PHONE:	NET PRICE	129,303.03
CITY, STATE, ZIP:	STATE SALES TAX	-
COMMENTS:	LICENSE MO. & FEE	-
AMOUNT:	TITLE FEE (INCLUDES \$5 TAG FEE)	5.00
NAME:	COMMERCIAL INSPECTION FEE	40.00

ADDITIONAL INFORMATION

BUY BOARD #430-13	DEALER'S INVENTORY TAX	276.97
Proposal is for two Kenworth T880 15' Dump Trucks	DOCUMENTARY FEE*	75.00
6x4 Daycab - Eaton Ultrashift 10 Speed - Engine MX 455HP 1650	EXTENDED WARRANTY	-
14.6K Front - 40K Rear Axle - 4.11 Ratio - 40K Rear Suspension	SUBTOTAL	129,700.00
Pricing is PER UNIT.	BALANCE OWED ON TRADE	-
PAYMENT IN FULL AT TIME OF DELIVERY.	SUBTOTAL	129,700.00
Standard Kenworth Class 8 Heavy Duty Warranty Applies.	PREPAYMENT	-
	BALANCE DUE UPON DELIVERY	129,700.00

DISCLAIMER OF WARRANTY

Any warranties on the products sold hereby are those made by the manufacturer. The seller, CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER, hereby expressly disclaims all warranties, either express or implied, including any implied warranty of merchantability or fitness for a particular purpose, and CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER neither assumes nor authorizes any other person to assume for it any liability in connection with the sale of said products.

* A DOCUMENTARY FEE IS NOT AN OFFICIAL FEE. A DOCUMENTARY FEE IS NOT REQUIRED BY LAW, BUT MAY BE CHARGED TO BUYERS FOR HANDLING DOCUMENTS RELATING TO THE SALE. A DOCUMENTARY FEE MAY NOT EXCEED A REASONABLE AMOUNT AGREED TO BY THE PARTIES. THIS NOTICE IS REQUIRED BY LAW.

Vehicle(s) are subject to prior sale and will not be held more than five working days.

PURCHASER _____

THIS ORDER NOT BINDING UNTIL ACCEPTED BY DEALER.

SALESPERSON _____

ACCEPTED BY _____



Performance Truck - Kenworth C359
6855 N. Loop 610 E.

Fort Bend Co Drainage District
1124 Blume Rd.

Houston, Texas United States 77028

Phone: (713) 844-7169

Fax:

Email: pfredrich@performancetruck.com

Rosenberg, Texas United States 77471

Phone: (281) 633-7550

Fax:

Contact Email:

Prepared for: Steve Korenek

Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	14600
Type:	FULL TRUCK	Rr Axle Load (lbs)	40000
Description:	2016 Dump Truck	G.C.W. (lbs):	80000
Application		Road Conditions:	
Intended Serv.:	Local pickup & delivery.	Class A (Highway)	85
Commodity:	Vehicles which haul	Class B (Hwy/Mtn)	10
	Gravel/crushed rock/sand	Class C (Off-Hwy)	05
Body		Class D (Off-Road)	00
Type:	End dump	Maximum Grade:	6
Length (ft):	14.0	Wheelbase (in):	188
Height (ft):	13.5	Overhang (in):	61
Max Laden Weight (lbs):	4000	Fr Axle to BOC (in):	68
Trailer		Cab to Axle (in):	120
No. of Trailer Axles:	0	Cab to EOF (in):	181
		Overall Comb. Length (in):	298
Type:		Special Req.	
Length (ft):	0.0	U.S. Domestic Registry, 50-State	
Height (ft):	0.0		
Kingpin Inset (in):	0		
Corner Radius (in):	0		
Restrictions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:36:21 PM

Incomplete

Model Number: T880 Series Conventional

Effective Date: Jan 1, 2016

Quote/DTPO/CO: Q11935042

Prepared by: Preston A Fredrich

Version Number: 37.00



Performance Truck - Kenworth C359
6855 N. Loop 610 E.

Fort Bend Co Drainage District
1124 Blume Rd.

Houston, Texas United States 77028

Phone: (713) 844-7169

Fax:

Email: pfredrich@performancetruck.com

Rosenberg, Texas United States 77471

Phone: (281) 633-7550

Fax:

Contact Email:

Prepared for: Steve Korenek

Data	Code	Description	Weight
Model			
0000810	O	T880 Series Conventional	15,236
0070060	O	T880	0
0072000	O	Chassis operation will not include a stationary application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	0
0080066	O	CARB Idle Emissions Reduction Feature. Paccar MX engines - Low NOx Idle.	0
0090000	O	Non-Sleeper w/rear axle capacity less than 59K.	0
0091042	O	Gravel/crushed rock/sand	0
0093005	O	Local pickup & delivery. Vehicles which haul freight, typically operating within a 100-mile radius, on public streets & highways, & other paved surfaces, including limited Class C roads. Includes package & freight delivery, as well as fuel oil or petroleum distribution, etc. Road usage: minimum 3% Class B, do not code for Class D.	0
0095010	O	End dump	0
0098025	O	U.S. Domestic Registry, 50-State	0

Engine & Equipment

0700655	S	PACCAR MX-13 455 2013+ 455@1700 1650@1000	0
		with engine brake.	
		N08000 N219 0....Offset mode	
		N08030 N224 2....Maximum Vehicle Speed Bonus	
		N08040 N227 -2....Maximum Vehicle Speed Penalty	
		N08190 N246 4....Minimum Vehicle Speed for DSA Activation	
		N08200 N247 1....Lowest Gear that DSA will be active	
		N08210 N248 6....Highest Gear that DSA will be active	
		N09020 N170 72...Standard Maximum Speed Limit [LSL]	
		N09030 N169 0....VSL Expiration Distance	
		N09040 N162 72...Maximum Accelerator Pedal Vehicle Speed	
		N09060 N163 0....Maximum Cycle Distance	
		N09070 N052 650..Engine Idle Speed	
		N09100 N015 No...Enable Retarder During Manual Transmission Gear Selection	
		N09110 N019 0....Delay in Engine Brake Activation w/ Brake Pedal Depressed	

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:36:21 PM
Effective Date: Jan 1, 2016
Prepared by: Preston A Fredrich

Incomplete

Model Number: T880 Series Conventional
Quote/DTPO/CO: Q11935042
Version Number: 37.00

Data	Code	Description	Weight
N09120	N014	2....Auto Retard Vehicle Speed Offset	
N09130	N013	4....Downhill Speed Limiter Vehicle Speed Offset	
N09140	N006	64...Max Cruise Speed	
N09150	N001	16...Minimum Speed to Turn Cruise Control Off	
N09160	N003	19...Minimum Cruise Control Speed	
N09170	N002	19...Min Speed to Automatically Turn Cruise Control On	
N09180	N005	1....Value to Increase Speed w/ Set/Accel Bump Switch	
N09190	N004	1....Value to Reduce Speed w/ Resume/Decel Bump Switch	
N09200	N039	OFF..Allow Multi-Torque Only When Cruise is Active	
N09210	N193	0....EIST Expiration Distance	
N09220	N188	5....Timer Setting Non-PTO Mode w/o Park Brake Set	
N09230	N187	5....Timer Setting Non-PTO Mode w/ Park Brake Set	
N09240	N194	60...Timer for Impending Shutdown Warning	
N09250	N190	Yes..Reset EIST Timer Based on Engine Load	
N09260	N191	No...Override EIST Timer Based on Engine Load - No Shutdown	
N09270	N183	35...Engine Load Threshold	
N09280	N186	5....Timer Setting When in PTO Mode	
N09290	N200	Yes..Allow EIST Timer Overrides in PTO Mode	
N09300	N185	40...Low Ambient Temperature Override	
N09310	N184	80...High Ambient Temperature Override	
N09350	N197	Yes..Enable Accelerator Pedal Reset	
N09360	N199	Yes..Enable Clutch Pedal Reset	
N09370	N198	Yes..Enable Service Brake Reset	
N09380	N071	ON...FIC Enable/Disable	
N09390	N072	1900.Maximum Fast Idle Control Engine Speed	
N09400	N105	100..Decrease Engine Speed w/ Res/Decel Bump Switch	
N09410	N107	100..Increase Engine Speed w/ Set/Accel Bump Switch	
N09420	N104	250..Rate to Decrease Engine Speed w/ Res/Decel Switch Held	
N09430	N103	350..Rate to Increase Engine Speed w/ Set/Accel Switch Held	
N09440	N080	1....PTO Vehicle Speed Limit	
N09450	N078	On...PTO Mode Disabled w/ Clutch Pedal Depressed	
N09460	N101	On...PTO Mode Disabled w/ Service Brake Depressed	
N09470	N079	On...PTO Mode Enable Only w/ Parking Brake Set	
N09480	N089	On...PTO Mode Enable Only w/ Transmission Neutral	
N09490	N082	50...Reduce Engine Speed w/ Resume/Decel Switch Bump	
N09500	N083	50...Increase Engine Speed w/ Set/Accel Switch Bump	
N09510	N084	250..Rate of Decrease in Engine Speed w/ Switch Held Down	
N09520	N085	350..Rate of Increase in Engine Speed w/ Switch Held Down	
N09530	N110	On...Enable Set Point w/ Set/Accel Switch Bump	
N09540	N087	780..RPM Set Point	
N09550	N086	2000.Maximum Engine Speed During PTO Operation	
N09560	N090	50...Reduce Engine Spd w/ Remote Res/Decel Switch Bump	
N09570	N092	50...Increase Engine Spd w/ Remote Set/Accel Switch Bump	

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00

Data	Code	Description	Weight
		N09580 N091 200..Rate of Decrease in Engine Speed w/ Switch Held Down	
		N09590 N093 250..Rate of Increase in Engine Speed w/ Switch Held Down	
		N09600 N106 660..Minimum Engine Speed During PTO Operation	
		N09610 N077 1902.Maximum Engine Torque During PTO Operation	
		N09620 N109 No...Enable PTO Speed Maxium Rate of Change	
		N09630 N081 75...PTO Speed Maximum Rate of Change	
		N09640 N173 0...Reserve Speed Offset	
		N09820 N065 5...HEST Warning Minimum Vehicle Speed	
		N09840 N179 Yes..Enable Park Brake Reset	
		N09880 N164 252..Reserve Speed Function Reset Distance	
		N09900 N182 30...Coolant Temperature Overrule	
		N09920 N073 Trq..Cab Accel Pedal Type in PTO Mode	
		N09940 N055 780..RPM Set Point 1	
		N09960 N056 1030.RPM Set Point 2	
1000156	O	Prospector Version 37.0 Replaces 36.2	0
1000206	O	Engine monitoring protection -Shutdown- PACCAR MX engine parameter.	0
1000244	O	Gearing Analysis: Balance power/economy blend results.	0
1000250	O	Customer's Typical Operating Spd: 58 MPH.	0
1000283	O	MX Retarder State Cruise Control On Coast Mode Selecting this code will program the engine controller to make coast mode available when cruise control is on, but not set, and the engine brake switch is on. Coast mode means the engine retarder is only activated when the brake pedal is depressed. 2013+	0
1000285	O	Enable MX Retarder Auto-Retard Selecting this code will program the engine to utilize the auto retard mode whenever cruise control speed has been set and the engine brake switch is on. The auto-retard mode will control the vehicle speed to an offset from the cruise control set speed via the engine retarder. The offset speed shall be dependent upon customer inputs via the electronic programming work screen. 2013+	0
1000350	O	PTO Speed control from cab station w/ o acc- -elerator pedal, PACCAR MX engine parameter.	0
1000613	O	Enable Reserve Speed Drive Cycle Limit	0
1000684	O	Effective VSL Setting NA	0
1000858	O	Engine Idle Shutdown Timer Disabled	0
1000859	O	Enable EIST Ambient Temp Overrule	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0
1006002	S	Air compressor: WABCO 28 CFM PACCAR MX.	0
1051200	S	Air Cleaner: composite firewall mounted PACCAR or Cummins engines	0
1099080	O	Pre-cleaner mounted in the hood plenum	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:36:21 PM
Effective Date: Jan 1, 2016
Prepared by: Preston A Fredrich

Incomplete

Model Number: T880 Series Conventional
Quote/DTPO/CO: Q11935042
Version Number: 37.00

Data	Code	Description	Weight
1105210	O	Fan hub: Horton 2-Speed for PACCAR MX	0
1123555	S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	Radiator bug screen mounted between hood & grille.	2
1247150	S	RH under cab DPF/SCR w/ RH SOC vertical tailpipe. For use w/ daycabs, extended daycabs, or modular sleepers. T660 requires split fender hood	0
1290124	O	Tailpipe: 5 in. single 24 in. 45 degree curved.	-3
1328150	O	PACCAR Fuel filter/water separator: return fuel heat w/integral thermostat. PACCAR MX 2013+	0
1816260	S	Alternator: PACCAR 160 amp, brush type	0
1821210	S	Batteries: 3 PACCAR GP31 threaded post (700) 2100 CCA dual purpose.	0
1836100	S	Starter: PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0
1840065	S	12V low voltage disconnect for starter battery protection.	0
1903020	O	Decline Driver Performance Assistant (DPA)	0

Transmission & Clutch

2058409	O	Transmission:Eaton FO16E308LL-VCS UltraShift Plus 10-speed w/Hill Start Aid feature. Standard with synthetic lubricant. This product has extended forward and reverse gear ratio coverage specifically designed for dump truck or other construction applications. C500, T660, T800 & W900 models utilize a cobrahead shift lever. *Torque Limit: 1650 pound-feet.	191
2250385	O	Clutch:UltraShift Plus OR Fuller Advantage Series Automated transmissions.	0
2405405	O	Driveline: 2 Dana 1810 heavy-duty 1 centerbearing *Hvy duty is 1810 series.	99
2410705	O	AutoShift/UltraShift cobrahead control integrated into dash.	0
2429351	O	First Transmission PTO compatibility - Chelsea 230/236/238/442/489/660/680-V3 or Muncie CS8/SH8/TG8S-P1 bottom mounted 6 or 8-Bolt PTO's for all Eaton transmissions. This application includes use of the standard hydraulic clutch actuator on Eaton FR & RT transmissions and supports bottom mounted 6 and 8-Bolt PTO's with single acting air actuation.	0
2429361	O	First customer installed Eaton transmission PTO.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00

Data	Code	Description	Weight
2460042	O	14 in. Eaton Fuller high capacity oil to water cooler standard for transmission 1550-2250 lb-ft, 18-speed AutoShift.	0
2493009	O	Aluminum clutch housing	0

Front Axle & Equipment

2513014	O	Meritor MFS14 14.6K 3.5in. drop standard track.	68
2621310	O	Front Brakes: 14.6K Bendix ES s-cam 16.5x5 in.	-62
2690008	O	Front Brake Drums:14.6K CastLite 16.5x5 in.	54
2702500	O	Front Hub: iron hub pilot 14,600 lbs. 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	48
2741970	S	ConMet PreSet Plus Hub package; front axle.	0
2750001	S	Hubcap: front vented.	0
2765001	O	Front Auto Slack Adjuster.	0
2864019	O	Front Springs Taperleaf 14.6K w/shock absorbers 2-leaf. With maintenance-free elastomer spring pin bushings. Standard with rubber pins. Not available on W900L or W900S.	25
2895101	O	Single power steering gear: 16K Sheppard SD110.	9
2899336	O	Power Steering Cooler: Radiator mounted air to oil 2007+ engines only. 2899362 is optional w/ 2006 or 2007 engines.	11
2900615	O	Threaded bushings for taperleaf springs 12K - 14.6K replacing rubber: T6/T8 & W9B only. W9L gets as standard: code not required. Not available with W9S.	0

Rear Axle & Equipment

3122252	O	Dual Meritor MP40-14x4 rear axle rated at 40K. w/ heavy-wall housing with pump. Tandem rear axles.	50
3200411	O	Rear Axle Ratio - 4.11.	0
3334004	S	Dual Rear Brakes 16-1/2x7 in. to 46K; Bendix ES-extended service S-cam.	0
3392022	O	Dual Rear Brake Drums: CastLite. 16.5x7 in.	-32
3407046	O	Longer studs for aluminum wheels w/ steel hub pilot wheels.	6
3407050	S	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0
3441972	S	ConMet PreSet Plus Hub package; dual rear axle.	0
3465002	S	Dual Rear axle automatic slack adjusters.	0
3485207	O	Spring Brake: 3030 long stroke dual 30 square inches travel; replaces standard 2-1/2 in. travel. Helps keep brakes in adjustment longer.	4
3495228	O	Bendix 4S/4M anti-lock brake system w/ air traction control (ATC).	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00

Data	Code	Description	Weight
3500037	O	Interaxle driveline:1 Dana 1710 Series	0
3736418	O	Rear suspension: Tandem Reyco 102 40K. 4-spring multileaf & 52 in. axle spacing. Steel crossmembers & gussets. Unladen Height: 10.8 in. Laden Height: 9.2 in.	18
Tires & Wheels			
4077535	O	Front tires: Bridgestone M860A 315/80R22.5 20PR. 42.8 in. diameter, all position. 19.9 in. SLR.	94
4277438	O	Rear tires: Bridgestone M726EL 11R24.5 14PR. 44.2 in. diameter. Long haul or P & D drive tire. 20.6 in. SLR. Code is priced per pair of tires.	212
4900008	O	Rear Tire Quantity: 8	0
5042311	O	Front wheel: Accuride 29039 22.5X9 steel Steel Armor[TM] powder coat, hub pilot mount. 10000lb. maximum rating. 5-hand holes.	70
5242315	O	Rear wheel: Accuride 50641 24.5X8.25 steel ACCU-LTE. Steel Armor[TM] powder coat, hub pilot mount. 7400lb. maximum rating. 5-hand hole.	64
5853906	O	Powder coat white steel wheel. Use in conjunction with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0
5900008	O	Rear Wheel/Rim Quantity: 8	0
Frame & Equipment			
6056400	O	Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel 285in. to 336 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	243
6302361	O	Bumper: Tapered polished aluminum channel. Requires a bumper setting code.	-6
6319485	O	48.5 in. Bumper setting. Requires a bumper code.	0
6324025	O	Front tow hook: Center mounted, cast. Requires iron front drive brackets.	28
6390312	O	Brackets: Iron front spring drive. Included with front spring capacity of 16,000 lbs or greater; code not required.	47
6400636	O	Battery box cantilever aluminum BOC w/ fiberglass cover.	8
6409902	O	Battery box location: RH Side.	15
6451090	O	T470,C5, T6, T8 non-polished DPF/SCR or CNG cover diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components.	30
6721102	S	Rear mudflap arms: Betts B-25 standard-duty, straight. Includes B1732 mounting brackets as standard.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00

Data	Code	Description	Weight
6722000	S	Rear mudflap shields: White plastic antisail w/ Kenworth logo.	0
6742009	S	Square end-of-frame w/ o crossmember;non-towing.	0
Fuel Tanks & Equip			
7210090	O	Fuel Tank: 90 US gallon 24.5in. aluminum under replace. Class 8 fuel tanks w/ o locking caps include an anti-siphon device on the filler neck.	-4
7722011	O	Small round DEF tank. 11 gallons of useable volume. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
7831008	O	6in. wide lower fuel tank step, for one 22in. or 24.5in. tank LH.	2
7889203	O	Standard DEF to fuel fill ratio: 2:1 or greater.	0
7889245	S	Anti-siphon device swaged in place. For any number of fuel tanks.	0
7889604	O	DEF tank location is on the LH.	0
7920090	O	Location: 90 gal fuel tank LH under cab	0
Cab & Equipment			
8025301	S	Cab: Stamped aluminum cab with panoramic curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
8090605	S	Hood:T880 Short Length MX-Optimized W/Mechan. Fastened Fenders. 116.7 inch BBC.	0
8108002	O	Fine particulate filter for cabin air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	0
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0
8201200	O	Adjustable telescoping tilt steering column.	0
8203060	O	5 sets of keys. Replaces standard 2 sets of keys.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00

Data	Code	Description	Weight
8205012	O	Off-highway dash switch: For ABS system. Includes indicator light.	0
8205164	O	Dash Switch: 1st Single-Acting Eaton-mntd PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	0
8208495	O	Two spare switches: Wired to power.	0
8208602	O	Dash Switch: W/light & guard for truck dump gate. Includes approximately 3 meters of coiled wire BOC in LH rail.	0
8220106	O	Gauge: Dash mounted air filter restriction gauge.	0
8221160	O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	0
8222712	O	Gauge: Fuel filter restriction gauge.	0
8225658	O	Gauge: Axle oil temperature, dual-drive axle. (2 gauges) w/integral warning light.	0
8282007	S	Kenworth Driver Performance Center:5in Full Color high resolution Thin Film Transistor (TFT) active matrix display with advanced driver information including fuel economy performance, outside air temp, clock, odometer and trip, engine hour meter, ignition timer, engine RPM, general truck information, diagnostics, and gear display. All Highline functionality is accessed via the Kenworth MCS providing intuitive control at the driver's fingertips. Also includes Dark Cabin functionality. When activated, the only interior light that will function when a door is opened is the door courtesy lamp.	0
8282013	S	Kenworth instrumentation and control package with 9 standard easy-read gauges: includes speedometer, tachometer, fuel gauge, engine coolant temp, engine oil pressure, voltmeter, dual air pressure, air application pressure and DEF gauge. All accessory controls utilize electronically activated solenoids that include advanced vehicle protection interlocks.	0
8282108	O	Modular Dash Options: Dash storage unit with two shelves. Reduces total gauge count by 6.	0
8300008	S	Interior color: Slate Gray	0
8330102	S	Interior package: Vantage daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
8410200	O	DR Seat: GT701 HB with Vinyl material. The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:36:21 PM
Effective Date: Jan 1, 2016
Prepared by: Preston A Fredrich

Incomplete

Model Number: T880 Series Conventional
Quote/DTPO/CO: Q11935042
Version Number: 37.00

Data	Code	Description	Weight
8480097	O	RD Seat: GT100 Tube Frame IB with Vinyl Material. The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. RD seat standard w/ LH armrest.	-9
8490187	S	Seat color: Slate Gray with Gray stitching.	0
8601421	O	Kenworth Radio with AM/FM/WB/USB and Bluetooth	4
8698974	O	Base Audio System - Daycab: High Performance Door Speakers.	2
8700168	S	Non-self cancelling turn signal: W/column-mounted headlight dimmer switch & intermittent wiper control.	0
8700663	O	Kenworth TruckTech+ The Kenworth Remote Diagnostics system provides the Worlds Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This option is Standard on all Kenworths with an MX engine.	0
8800260	O	Long grabhandle RH side mounted to side-of-cab exhaust.	2
8800372	O	Grabhandle: LH, Exterior, Side of Cab - Ergonomic Ergonomic grab handle mounted to the left hand exterior of the cab for entry and exit. Hydroformed and polished stainless steel.	3
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0
8841411	S	Single air horn under cab.	0
8850139	S	Look-Down, Pass. Door, Black 11x6	0
8865002	S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871446	S	Rear cab stationary window 19in x 36in	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0
8890135	O	Exterior stainless steel sunvisor.	19
8890349	O	Wheelwell Fender Extension: 2.5 Inches	4
8890876	S	Kenworth Cab/Sleeper Air Suspension.	0

Lights & Instruments

9010553	S	Headlamps: SAE Dual Halogen Complex Reflector	0
9022137	S	Marker Lights: Five, rectangular, LED	0
9030016	S	Turn Signal Lights: Flush mounted LED mounted at top of fender wheel arc	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:36:21 PM
Effective Date: Jan 1, 2016
Prepared by: Preston A Fredrich

Incomplete

Model Number: T880 Series Conventional
Quote/DTPO/CO: Q11935042
Version Number: 37.00

Data	Code	Description	Weight
9030052	S	LED Stop,Turn,Tail:Flange Mounted With Two LED backup lights and with an LED license plate.	0
9090027	O	Headlamps to turn on when wipers are active.	0
9090039	S	Marker Lights: Interrupter switch. Included in Turn Signal for all models except T3. The T3 switch is in the dash.	0
9090126	O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	4
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	0
Air Equipment			
9101210	S	Air Dryer: Bendix AD-IS heated.	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0
Extended Warranty			
9200021	S	Standard Warranty.	0
Miscellaneous			
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	4
9490404	O	One 5 lb. dry chemical type fire extinguisher mounted outboard of driver seat. Class ABC.	11
Paint			
9700000	O	Paint color number. N97020 A - F6456 DK CLOISONNE N97200 FRAME N0001 BLACK	0
9943004	O	Bumper Unpainted	0
9943052	O	Day Cab Pearl Metallic Paint	0
9944820	O	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0
Total Weight			16573

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/21/2016 2:36:21 PM	Incomplete	Model Number:	T880 Series Conventional
Effective Date:	Jan 1, 2016		Quote/DTPO/CO:	Q11935042
Prepared by:	Preston A Fredrich		Version Number:	37.00



Performance Truck - Kenworth C359
6855 N. Loop 610 E.

Fort Bend Co Drainage District
1124 Blume Rd.

Houston, Texas United States 77028

Phone: (713) 844-7169

Fax:

Email: pfredrich@performancetruck.com

Rosenberg, Texas United States 77471

Phone: (281) 633-7550

Fax:


Contact Email:

Prepared for: Steve Korenek

Horizontal Dimensions

Model: T880 Series Conventional

Quote/DTPO/CO Number: Q11935042

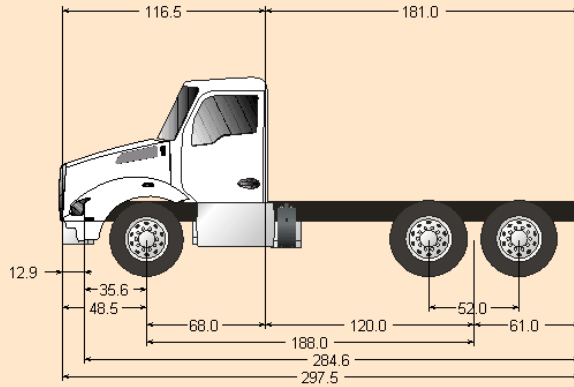

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:50:19 PM

Effective Date: Jan 1, 2016

Prepared by: Preston A Fredrich

Incomplete

Model Number:

T880 Series Conventional

Quote/DTPO/CO:

Q11935042

Version Number:

37.00



Performance Truck - Kenworth C359
6855 N. Loop 610 E.

Fort Bend Co Drainage District
1124 Blume Rd.

Houston, Texas United States 77028

Phone: (713) 844-7169

Fax:

Email: pfredrich@performancetruck.com

Rosenberg, Texas United States 77471

Phone: (281) 633-7550

Fax:

Contact Email:

Prepared for: Steve Korenek

Fuel Tanks


☒ Summary
☐ Right ☐ Left

Location
Under Cab
Back Of Cab 1
Back Of Cab 2
Between Rails
Across Rails BOC
Def Tank

Type

Material

Diameter

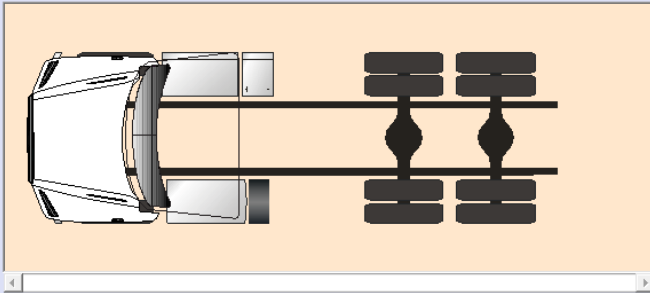

☒ Top View
☐ Side View

Right Side Available Space: 45.00 in. Current Wheelbase Space: 188
Left Side Available Space: 47.40 in. Required Wheelbase Space: 143

Position	Description	Price	Weight
RH Under	T470,C5, T6, T8 non-polished DPF/SCR or CNG cover	105	30
LH Under	Fuel Tank: 90 US gallon 24.5in. aluminum under	9	-4
RH BOC1	Battery box cantilever aluminum BOC w/	89	8
LH Def Tank	Small round DEF tank. 11 gallons of	0	0

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/21/2016 2:51:03 PM

Effective Date: Jan 1, 2016

Prepared by: Preston A Fredrich

Incomplete

Model Number: T880 Series Conventional

Quote/DTPO/CO: Q55035524

Version Number: 37.00