



**PERMIT APPLICATION REVIEW FORM FOR
CABLE, CONDUIT, AND POLE LINE ACTIVITY
IN FORT BEND COUNTY**

**Fort Bend County
Engineering Department**
301 Jackson Suite 401
Richmond, Texas 77469
281.633.7500
Permits@fortbendcountytx.gov

- Right of Way Permit**
 Commercial Driveway Permit

Permit No: 2018-18585

The following "Notice of Proposed Cable, Conduit, and/or Pole Line activity in Fort Bend County" and accompanying attachments have been reviewed and the notice conforms to appropriate regulations set by Commissioner's Court of Fort Bend County, Texas.

(1) COMPLETE APPLICATION FORM:

- a. Name of road, street, and/or drainage ditch affected.
 b. Vicinity map showing course of directions
 c. Plans and specifications

(2) BOND:

- County Attorney, approval when applicable.
- Perpetual bond currently posted. Bond No: ██████████ Amount: \$50,000.00
- Performance bond submitted. Bond No: _____ Amount: _____
- Cashier's Check Check No: _____ Amount: _____

(3) DRAINAGE DISTRICT APPROVAL (WHEN APPLICABLE):

Drainage District Approval

Date

We have reviewed this project and agree it meets minimum requirements.

Charles O. Ay

Permit Administrator

2/16/2018

Date



**REVIEW BY FORT BEND COUNTY
COMMISSIONERS COURT**

**Fort Bend County
Engineering Department**
301 Jackson Suite 401
Richmond, Texas 77469
281.633.7500
Permits@fortbendcountytx.gov

Right of Way Permit

Commercial Driveway Permit

Permit No: 2018-18585

Applicant: PS Light Wave, Inc

Job Location Site: Katy Gaston Road, Katy, TX 77494

Bond No. **Date of Bond:** 12/13/2016 **Amount:** \$50,000.00

The above applicant came to make use of certain Fort Bend County property subject to, "The Order Regulating the Laying, Construction, Maintenance, and Repair of Buried Cables, Conduits, and Pole Lines, In, Under, Across or Along Roads, Streets, Highways, and Drainage Ditches in Fort Bend County, Texas, Under the Jurisdiction of the Commissioners Court of Fort Bend County, Texas," as passed by the Commissioners Court of Fort Bend County, Texas, of the Minutes of the Commissioners Court of Fort Bend County, Texas, to the extent that such order is not inconsistent with Chapter 181, Vernon's Texas Statutes and Codes Annotated.

Notes:

1. Evidence of review by the Commissioners Court must be kept on the job site and failure to do so constitutes grounds for job shutdown.
2. Written notices are required:
 - a. 48 hours in advance of construction start up, and
 - b. When construction is completed and ready for final inspection, submit notification to Permit Administrator thru MyGovernmentOnline.org portal.
3. This permit expires one (1) year from date of permit if construction has not commenced.

On this 27th day of February, 2018, Upon Motion of Commissioner _____, seconded by Commissioner _____, duly put and carried, it is ORDERED, ADJUDGED AND DECREED that said notice of said above purpose is hereby acknowledged by the Commissioners Court of Fort Bend County, Texas, and that said notice be placed on record according to the regulation order thereof.

Signature

Presented to Commissioners Court and approved.


By: 
County Engineer

Date Recorded _____ Comm. Court No. _____

By: N/A
Drainage District Engineer/Manager

Clerk of Commissioners Court

By: _____
Deputy

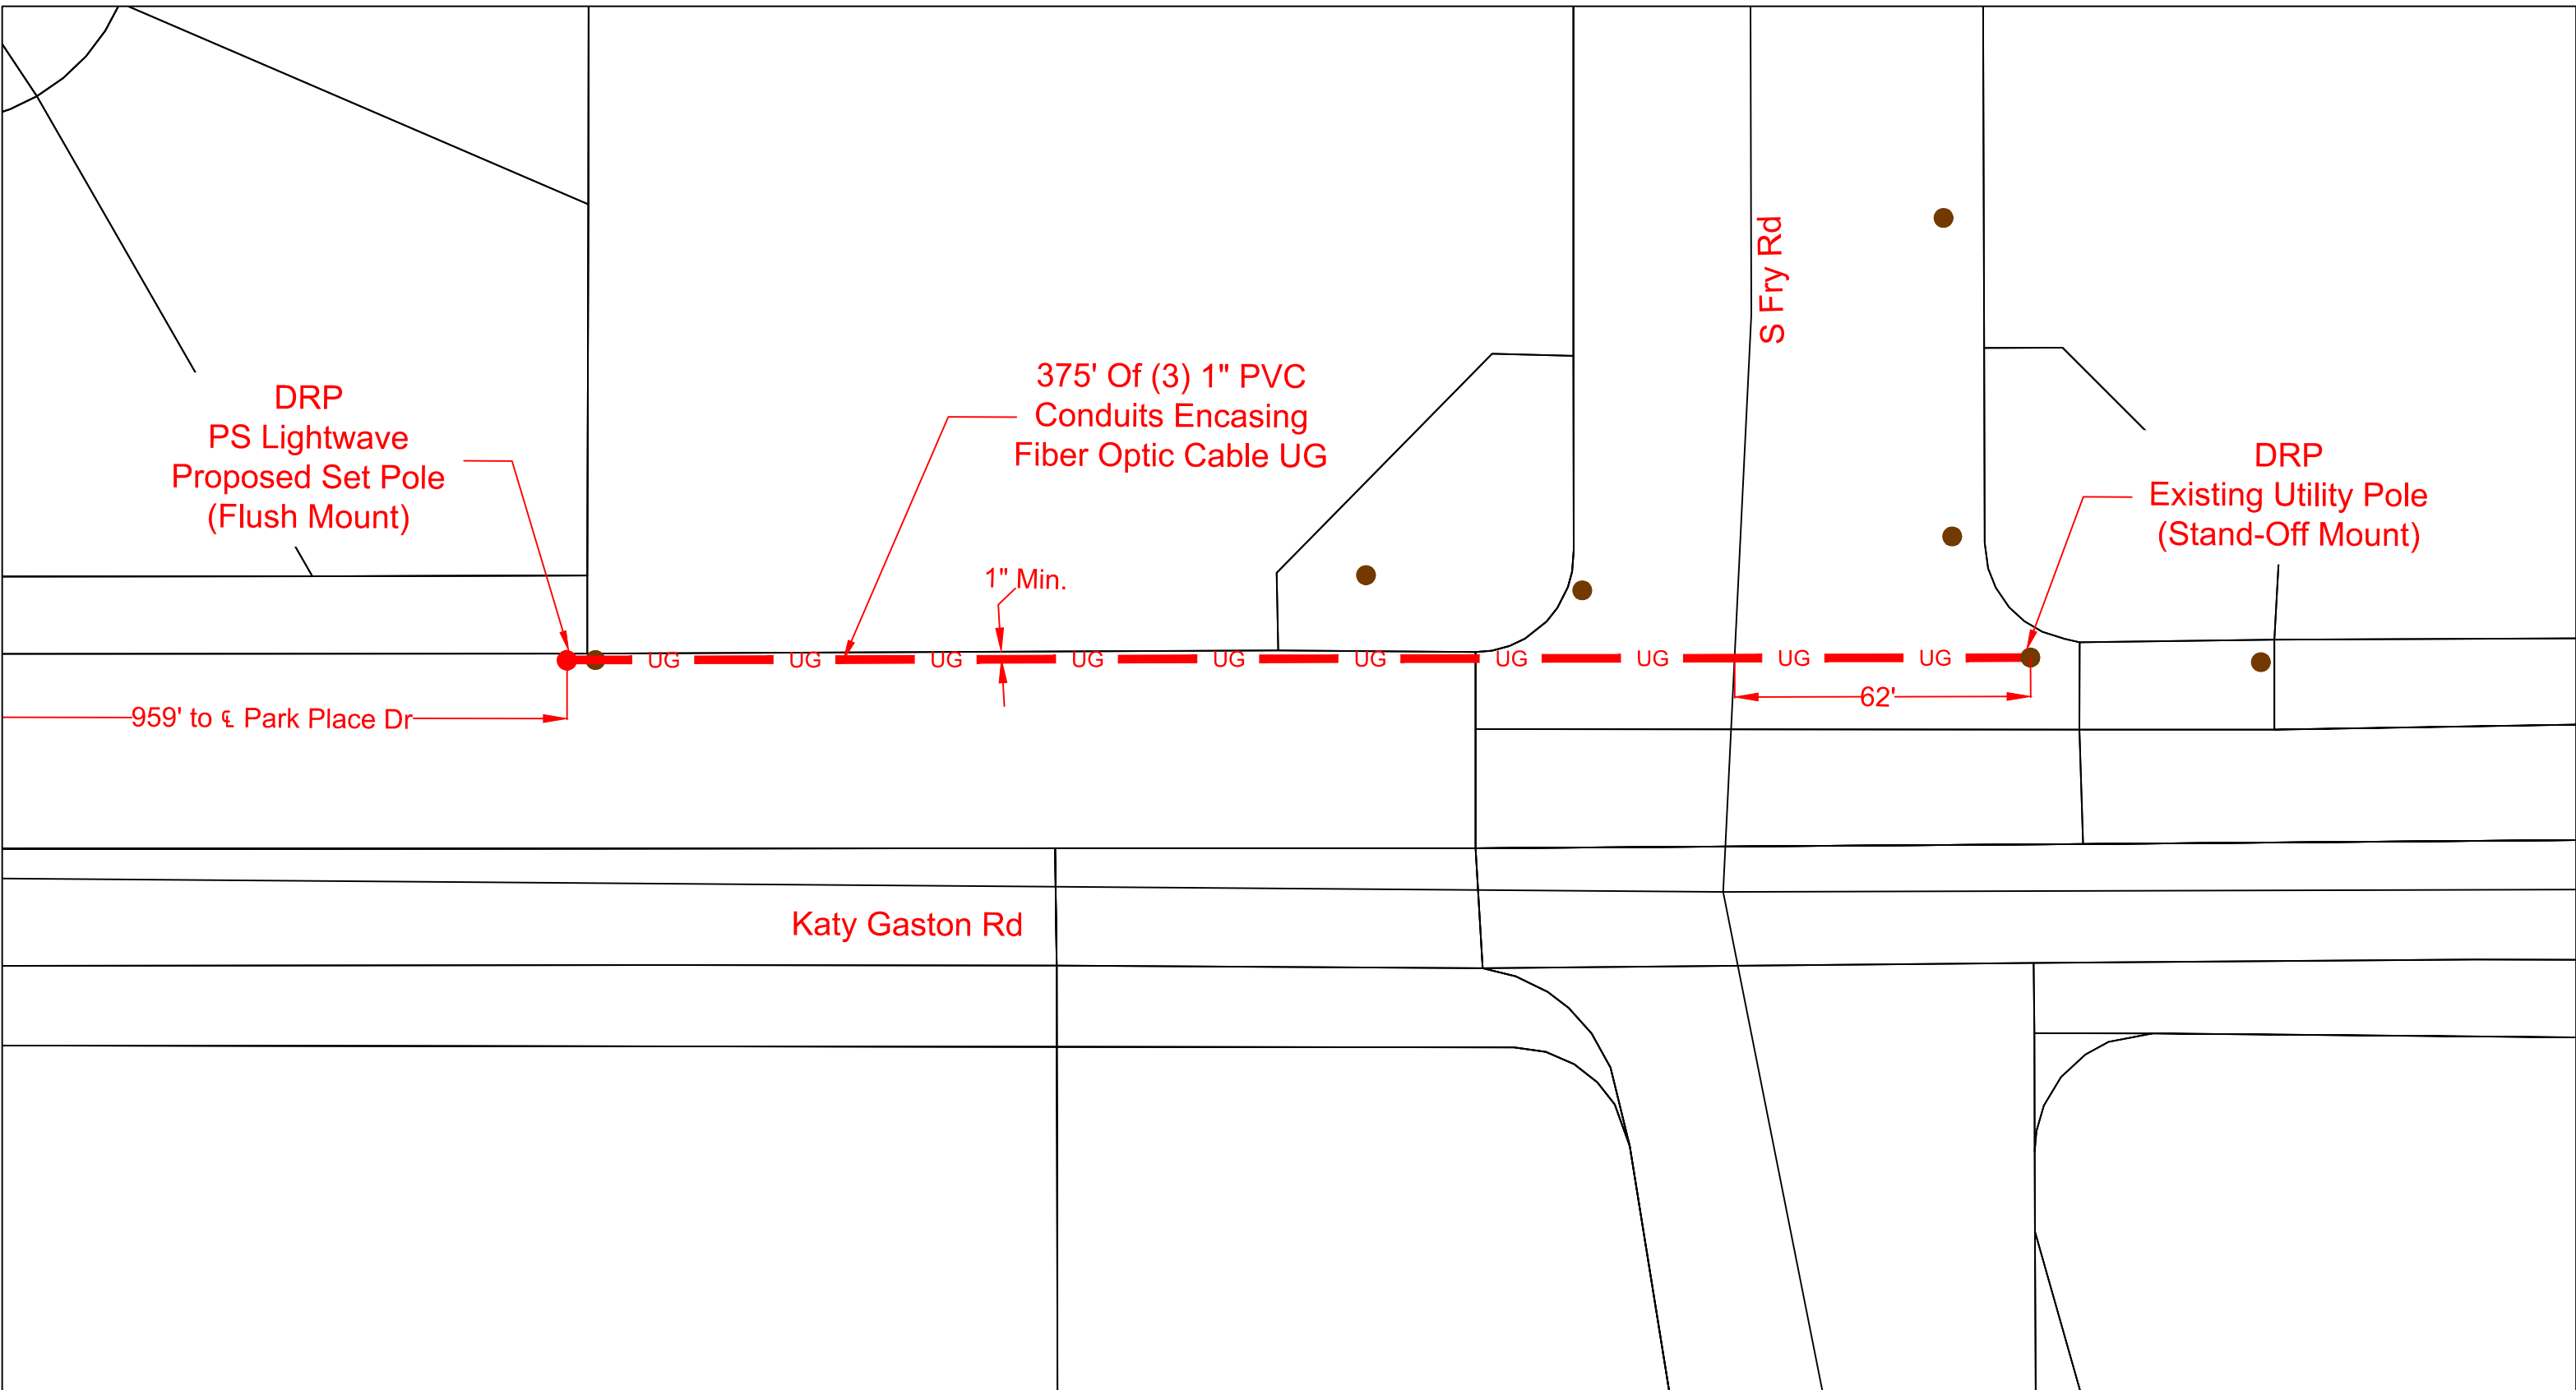


LEGEND		
UG	3(1") HDPE W/ F.O. CABLE	PSLW SET POLE
UG	3(1.25") HDPE W/ F.O. CABLE	EXISTING SET POLE
UG	1(2") HDPE W/ F.O. CABLE	EXISTING UTILITY POLE
UG	1(4") HDPE W/ 3(1.25")HDPE	PROPOSED PSLW VAULT (24"x36"x24")
UG	FLEX INNERDUCT	EXISTING VAULT
AIR	AERIAL FIBER OPTIC CABLE	PULLBOX
CAT5	CAT5 CABLE	MDF LOCATION
PROPOSED CONDUIT		
EXISTING CONDUIT		
EMT	1.25" EMT	
R/W	RIGHT-OF-WAY	
EOP	EDGE-OF-PAVEMENT	
FENCE	FENCE	
RACK LOCATION	RACK LOCATION	

PROPRIETARY INFORMATION - PROPERTY OF PS LIGHTWAVE

SCALE: 1"=40'	REVISION#1: Rev#1	DATE: Rev#1 Date
PAGE: 1	REVISION#2: Rev#2	DATE: Rev#2 Date
OF: 3	REVISION#3: Rev#3	DATE: Rev#3 Date
	REVISION#4: Rev#4	DATE: Rev#4 Date

CUSTOMER ID: JOB# 10502-7811			
CUSTOMER: Notice Of Proposed Utility Installation			
ADDRESS: Katy Gaston Rd			
CITY/ZIP: Katy TX 77494		COUNTY: Fort Bend	
TENANTS:	# OF FLOORS:	DWG#:	KEY MAP: 524 D
WO#: 100500	JOB#: 10502-7811	DRAWN BY: PJE	DATE: 02/05/2018
APPROVED BY:		DATE:	

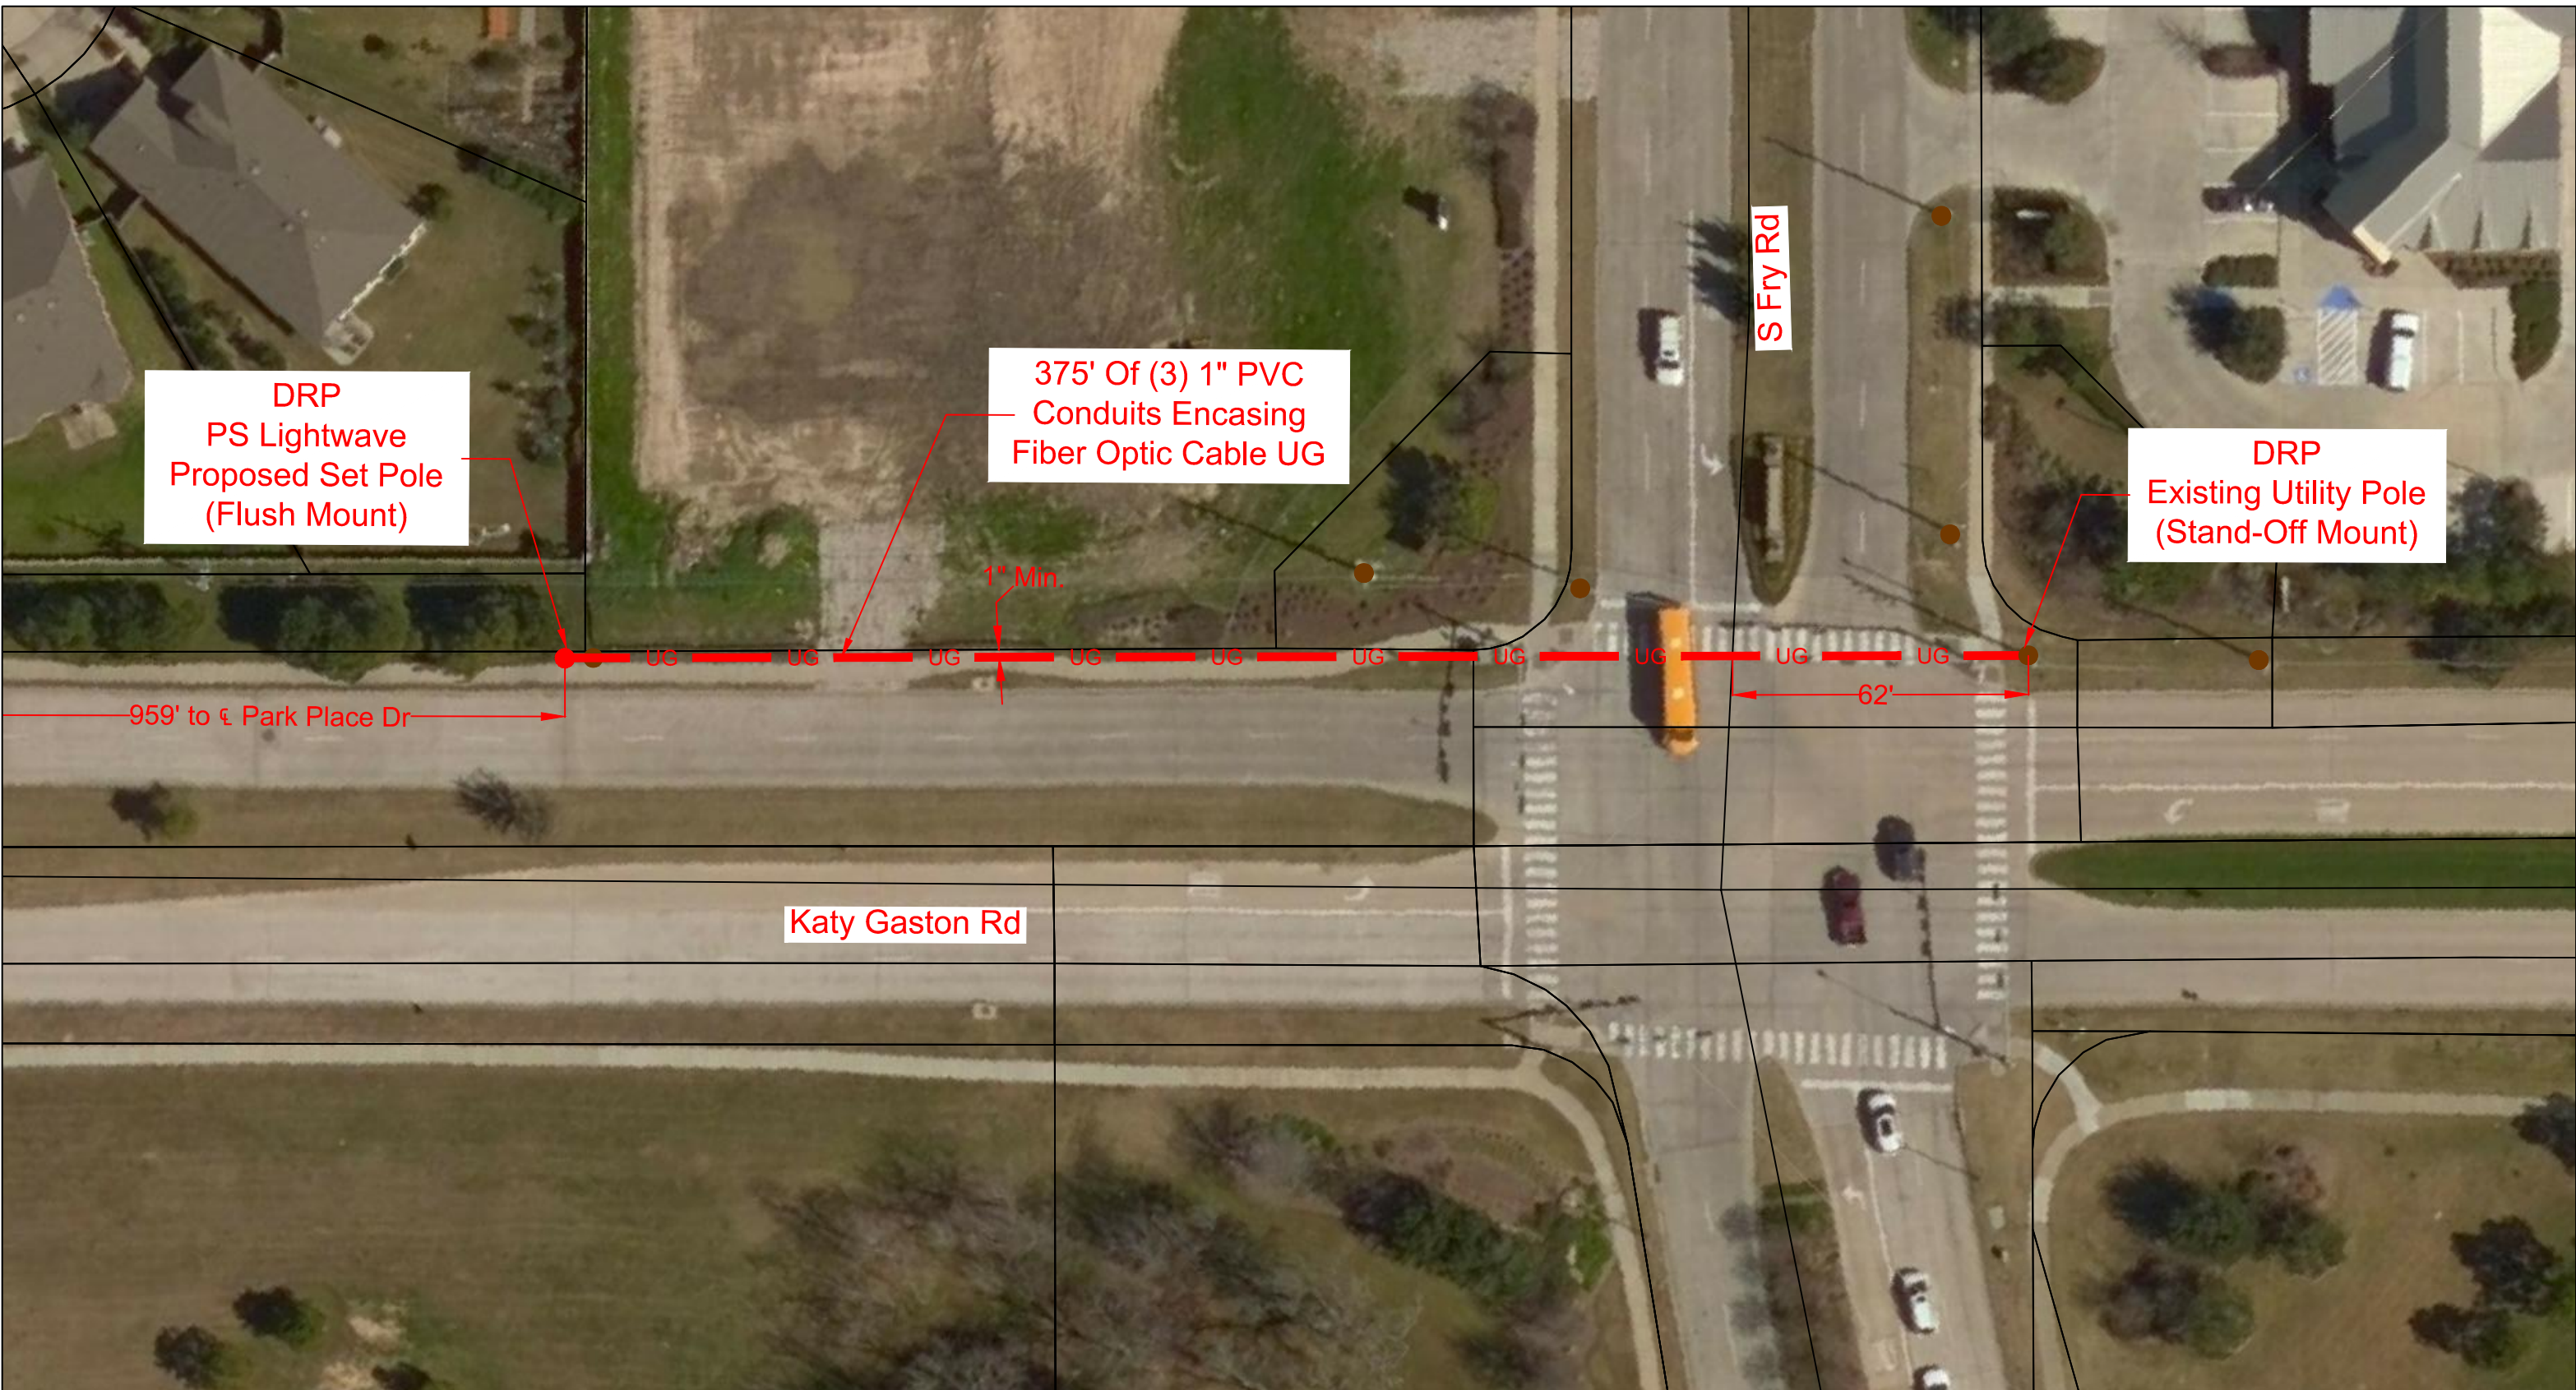

LEGEND		
	UG	3(1") HDPE W/ F.O. CABLE
	UG	3(1.25") HDPE W/ F.O. CABLE
	UG	1(2") HDPE W/ F.O. CABLE
	UG	1(4") HDPE W/ 3(1.25")HDPE
		FLEX INNERDUCT
	AIR	AERIAL FIBER OPTIC CABLE
	CAT5	CAT5 CABLE
		PROPOSED CONDUIT
		EXISTING CONDUIT
	EMT	1.25" EMT
	R/W	RIGHT-OF-WAY
	EOP	EDGE-OF-PAVEMENT
		FENCE
		RACK LOCATION
		PSLW SET POLE
		EXISTING SET POLE
		EXISTING UTILITY POLE
		PROPOSED PSLW VAULT (24"x36"x24")
		EXISTING VAULT
		PULLBOX
		MDF LOCATION

SCALE: 1"=40'

PAGE: 2


OF: 3

PROPRIETARY INFORMATION - PROPERTY OF PS LIGHTWAVE

REVISION#1: Rev#1	DATE: Rev#1 Date	CUSTOMER ID: JOB# 10502-7811	
REVISION#2: Rev#2	DATE: Rev#2 Date	CUSTOMER: Notice Of Proposed Utility Installation	
REVISION#3: Rev#3	DATE: Rev#3 Date	ADDRESS: Katy Gaston Rd	
REVISION#4: Rev#4	DATE: Rev#4 Date	CITY/ZIP: Katy TX 77494	COUNTY: Fort Bend
		TENANTS:	# OF FLOORS:
		WO#: 100500	JOB#: 10502-7811
		DRAWN BY: PJE	DATE: 02/05/2018
		APPROVED BY:	DATE:

General Notes:

- 1) Surface to be restored to its original condition in compliance with City of Mont Belvieu Standards.
- 2) Contractors shall provide and install traffic control devices in conformance with part VI of Texas manual on Uniform Traffic Control Devices (TMUTCD–Latest Edition with Revisions) during construction.
- 3) No Lanes shall be blocked 7am–9am and 4pm–6:30pm Monday thru Friday.

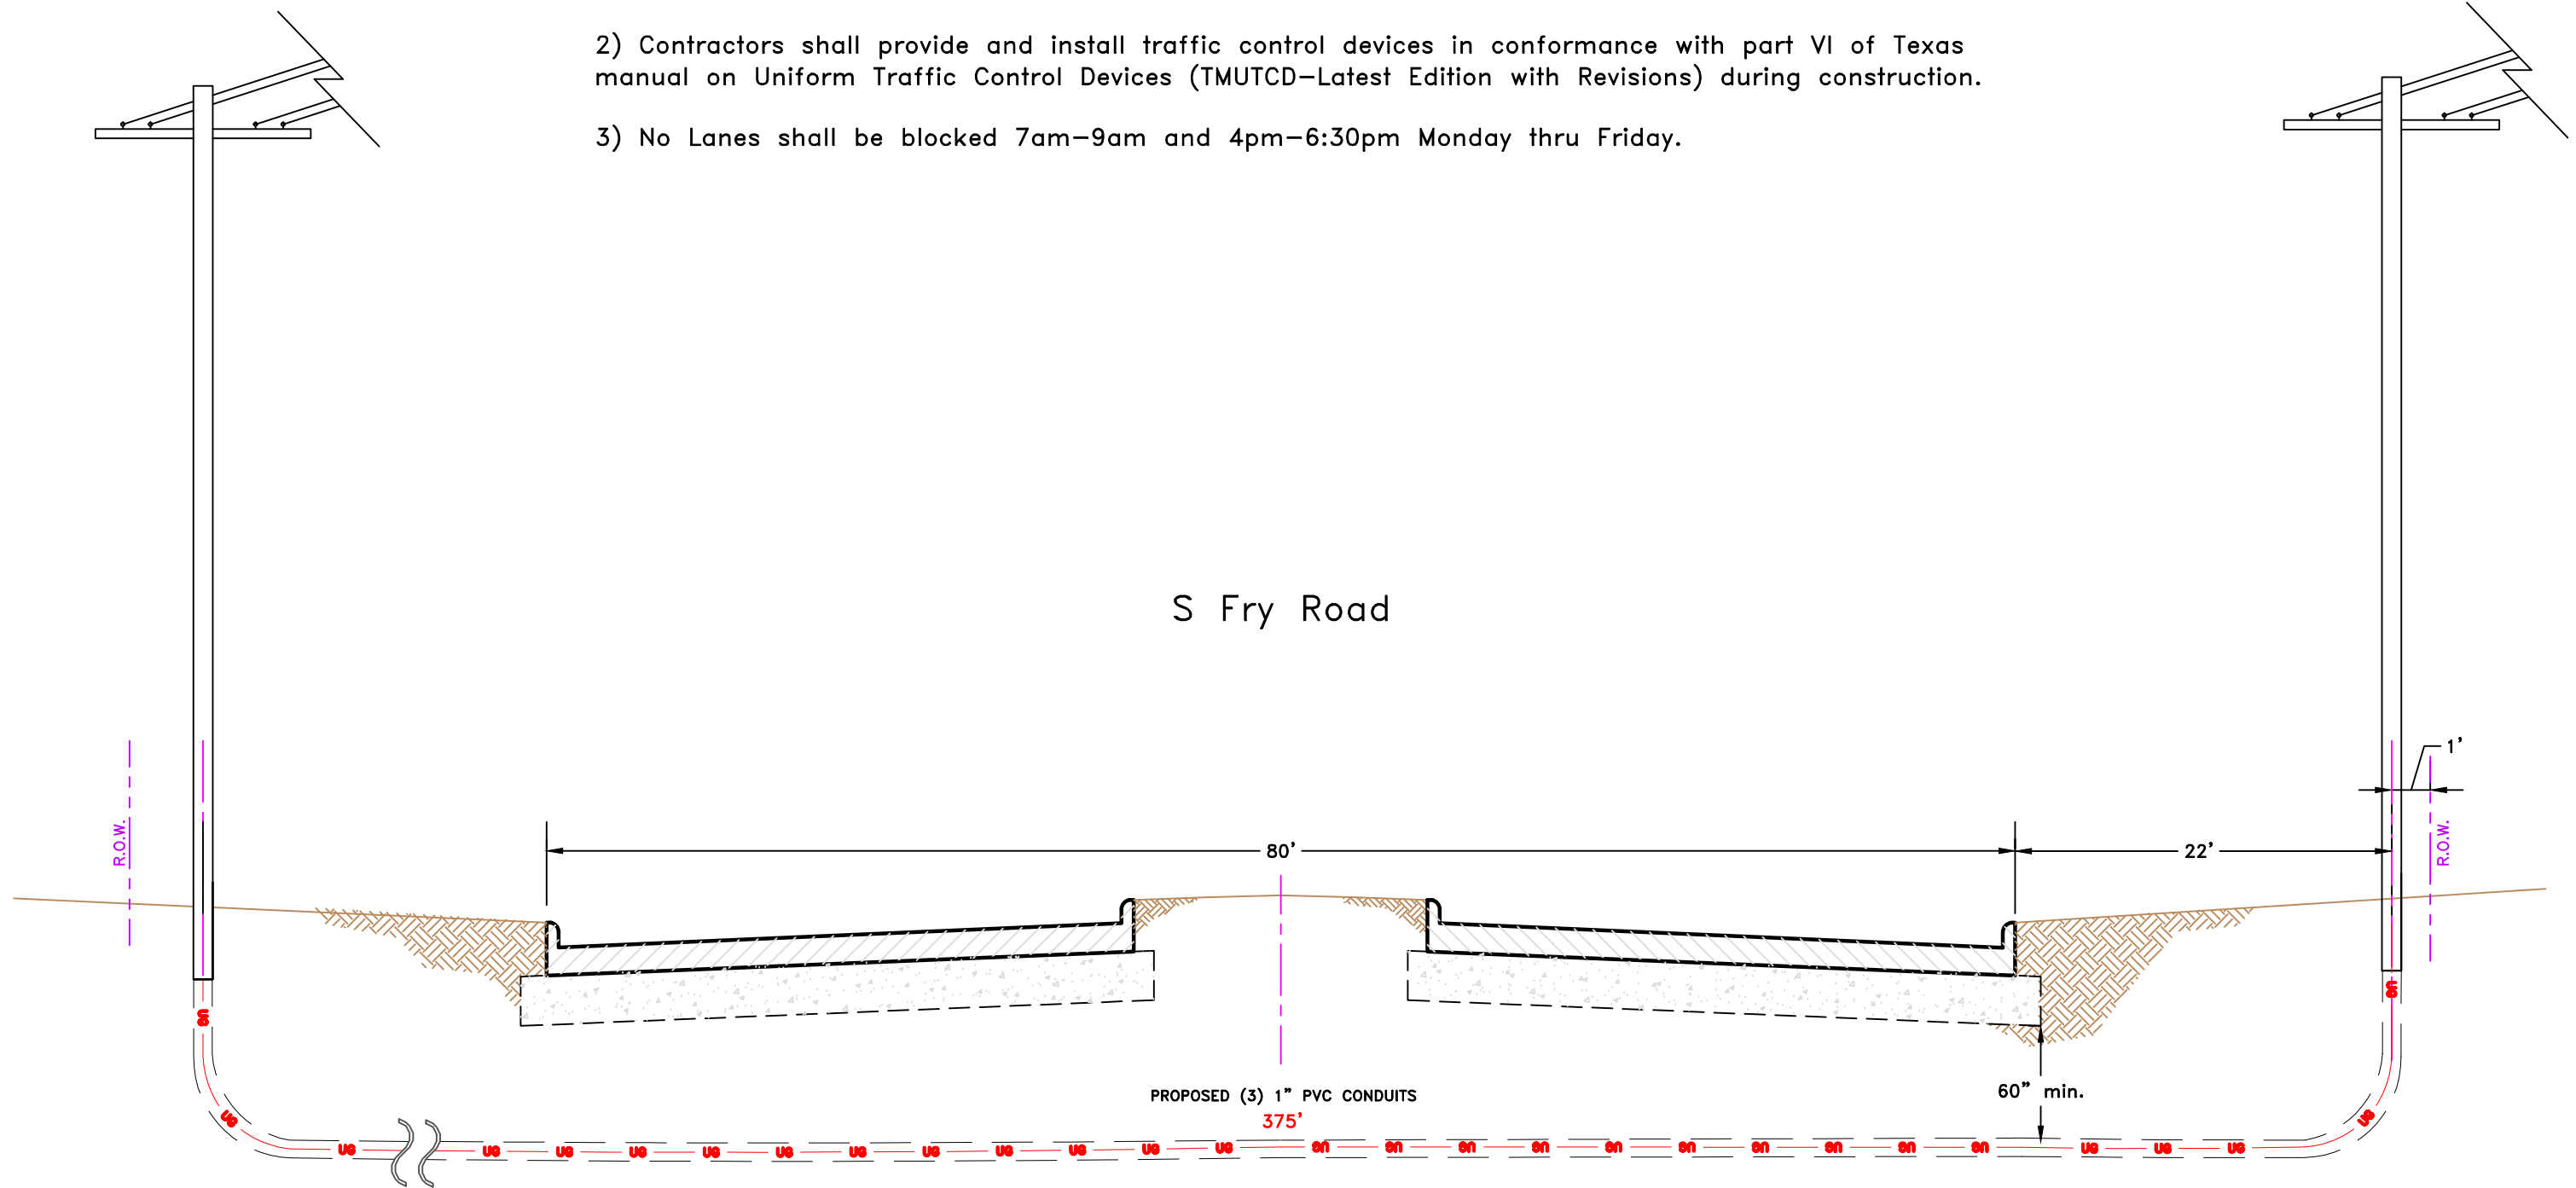

LEGEND			
	UG 3(1") PVC W/ F.O. CABLE		PSLW SET POLE
	UG 3(1.25") PVC W/ F.O. CABLE		EXISTING SET POLE
	UG 1(2") PVC W/ F.O. CABLE		EXISTING UTILITY POLE
	UG 1(4") HDPE W/ 3(1.25")PVC		PROPOSED PSLW VAULT (24"x36"x24")
	FLEX INNERDUCT		EXISTING VAULT
	AIR AERIAL FIBER OPTIC CABLE		PULLBOX
	CAT5 CAT5 CABLE		MDF LOCATION
	PROPOSED CONDUIT		
	EXISTING CONDUIT		
	EMT 1.25" EMT		
	R/W RIGHT-OF-WAY		
	EOP EDGE-OF-PAVEMENT		
	FENCE		
	RACK LOCATION		

SCALE: N.T.S



PAGE: 3

OF: 3

PROPRIETARY INFORMATION - PROPERTY OF PS LIGHTWAVE

Job# 10502-7811	
Description: Notice Of Proposed Utility Installation	
ADDRESS: Katy Gaston Rd	
CITY/ZIP: Katy TX 77494	COUNTY: Fort Bend
TENANTS:	# OF FLOORS:
WO#: 100500	JOB#: 10502-7811
APPROVED BY:	DATE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect use of the standard.

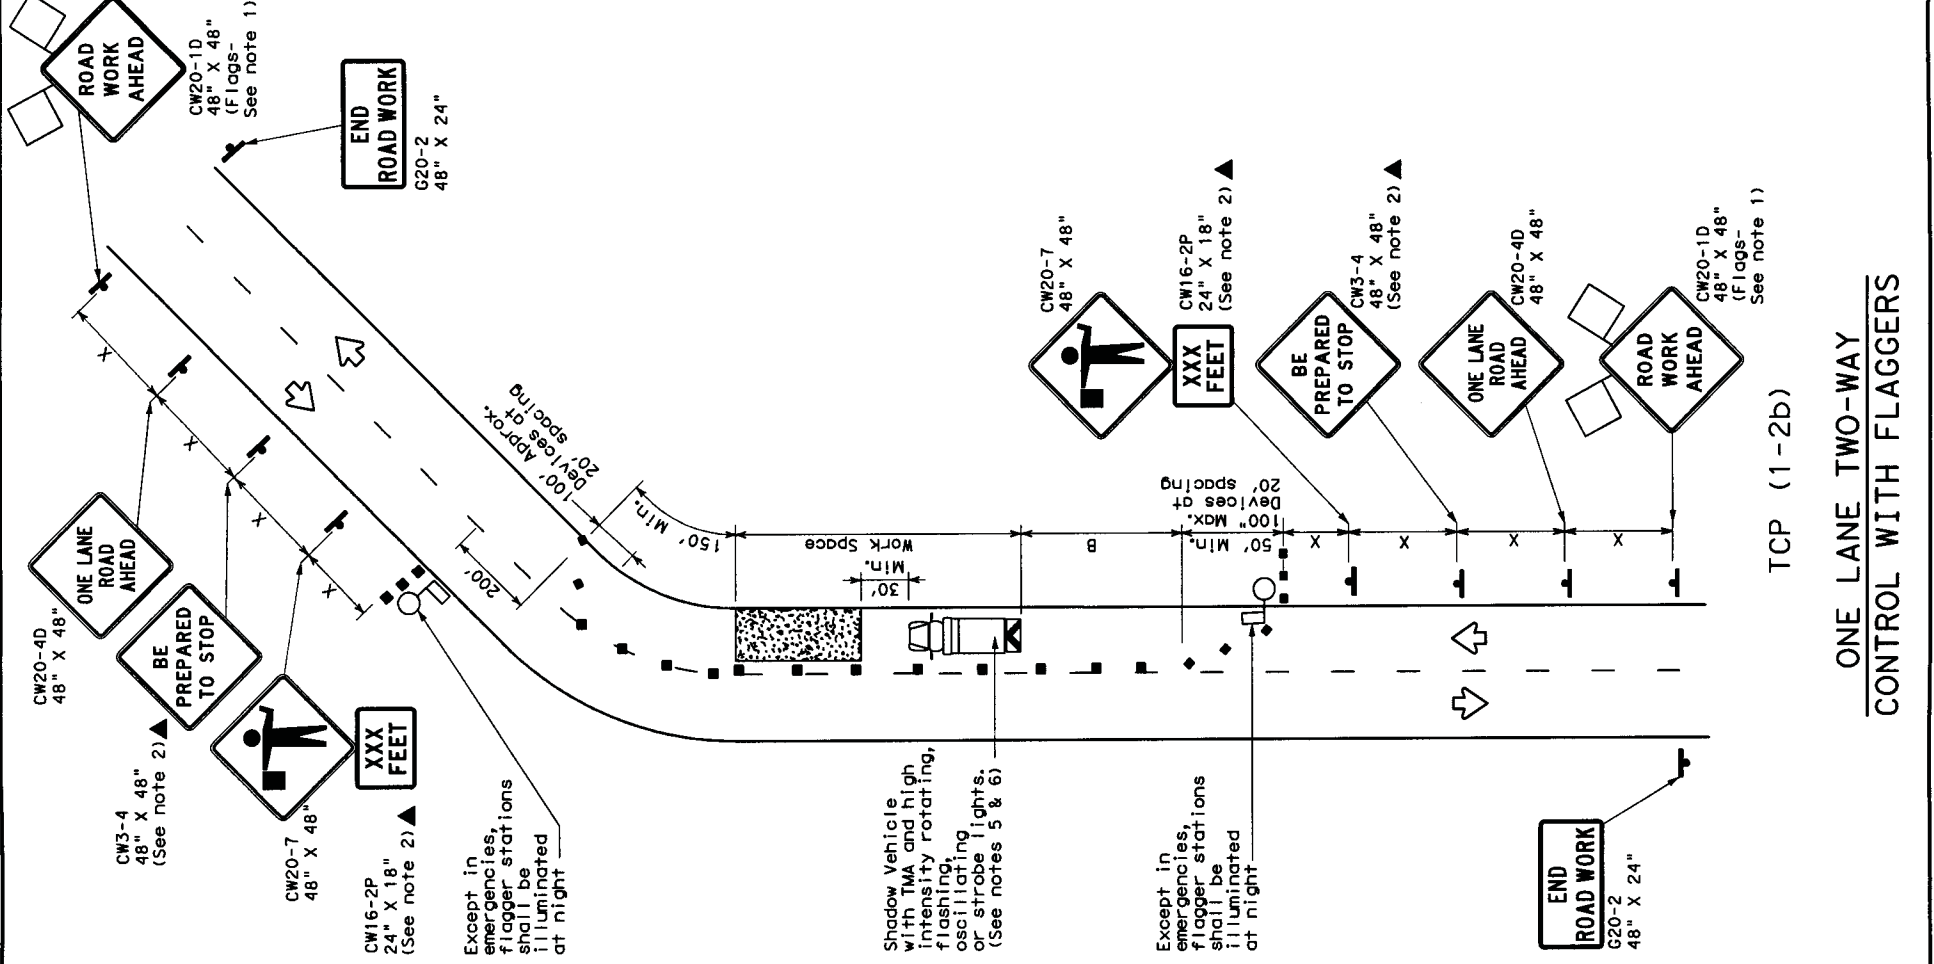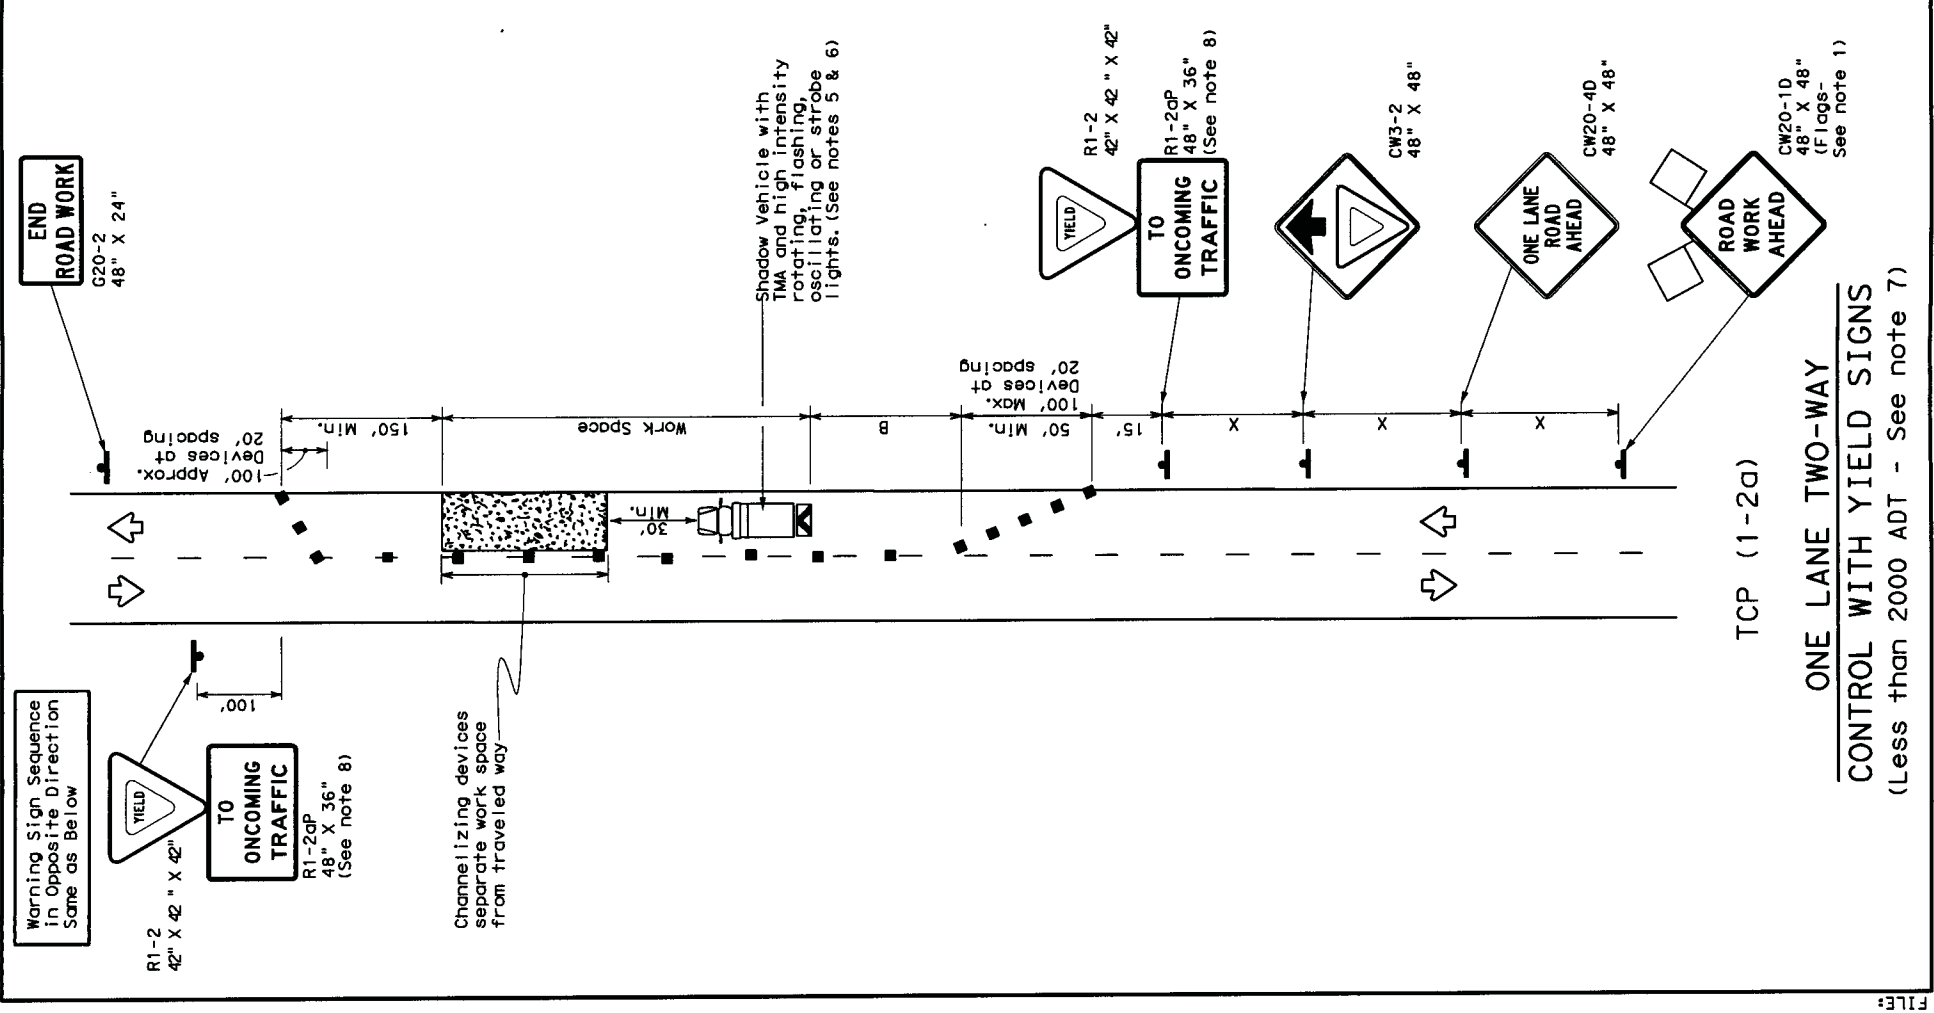

LEGEND

Channelizing Devices	Truck Mounted Attenuator (TMA)
Heavy Work Vehicle	Portable Changeable Message Sign (PCMS)
Trailer Mounted Flashing Arrow Board	Traffic Flow
Sign	Flagger
Flag	

Posted Speed * L	Formula L = WS / 60	Minimum Desirable Taper Lengths **		Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		Offset	Tangent	On a Taper	On a Tangent		
30		10'	11'	12'	30'	60'	200'
35		150'	165'	180'	30'	60'	250'
40		205'	225'	245'	35'	70'	305'
45		265'	295'	320'	40'	80'	360'
50		450'	495'	540'	45'	90'	425'
55		500'	550'	600'	50'	100'	495'
60		550'	605'	660'	55'	110'	570'
65		600'	660'	720'	60'	120'	645'
70		650'	715'	780'	65'	130'	730'
75		700'	770'	840'	70'	140'	820'
		750'	825'	900'	75'	150'	

* Conventional Roads Only
** Taper lengths have been rounded off.
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE		
MOBILE	SHORT TERM STATIONARY	LONG TERM STATIONARY
	✓	
		✓

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
- Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger or R1-2 "YIELD" sign is less than 1500 feet.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.

TCP (1-2a)

- R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet.
- R1-2 "YIELD" sign with R1-2aP "TO ONCOMING TRAFFIC" plaque shall be placed on a support at a 7 foot minimum mounting height.

TCP (1-2b)

- Flaggers should use two-way radios or other methods of communication to control traffic.
- Length of work space should be based on the ability of flaggers to communicate.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.
- Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

For construction or maintenance contract work, specific project requirements for shadow vehicles can be found in the project GENERAL NOTES for Item 502, Barricades, Signs and Traffic Handling.

Texas Department of Transportation
Traffic Operations Division



TRAFFIC CONTROL PLAN
ONE-LANE TWO-WAY
TRAFFIC CONTROL

TCP (1-2) - 12

REVISIONS

NO.	DATE	BY	REVISIONS
4-90	1-12		
2-94			
1-97			
4-98			

152

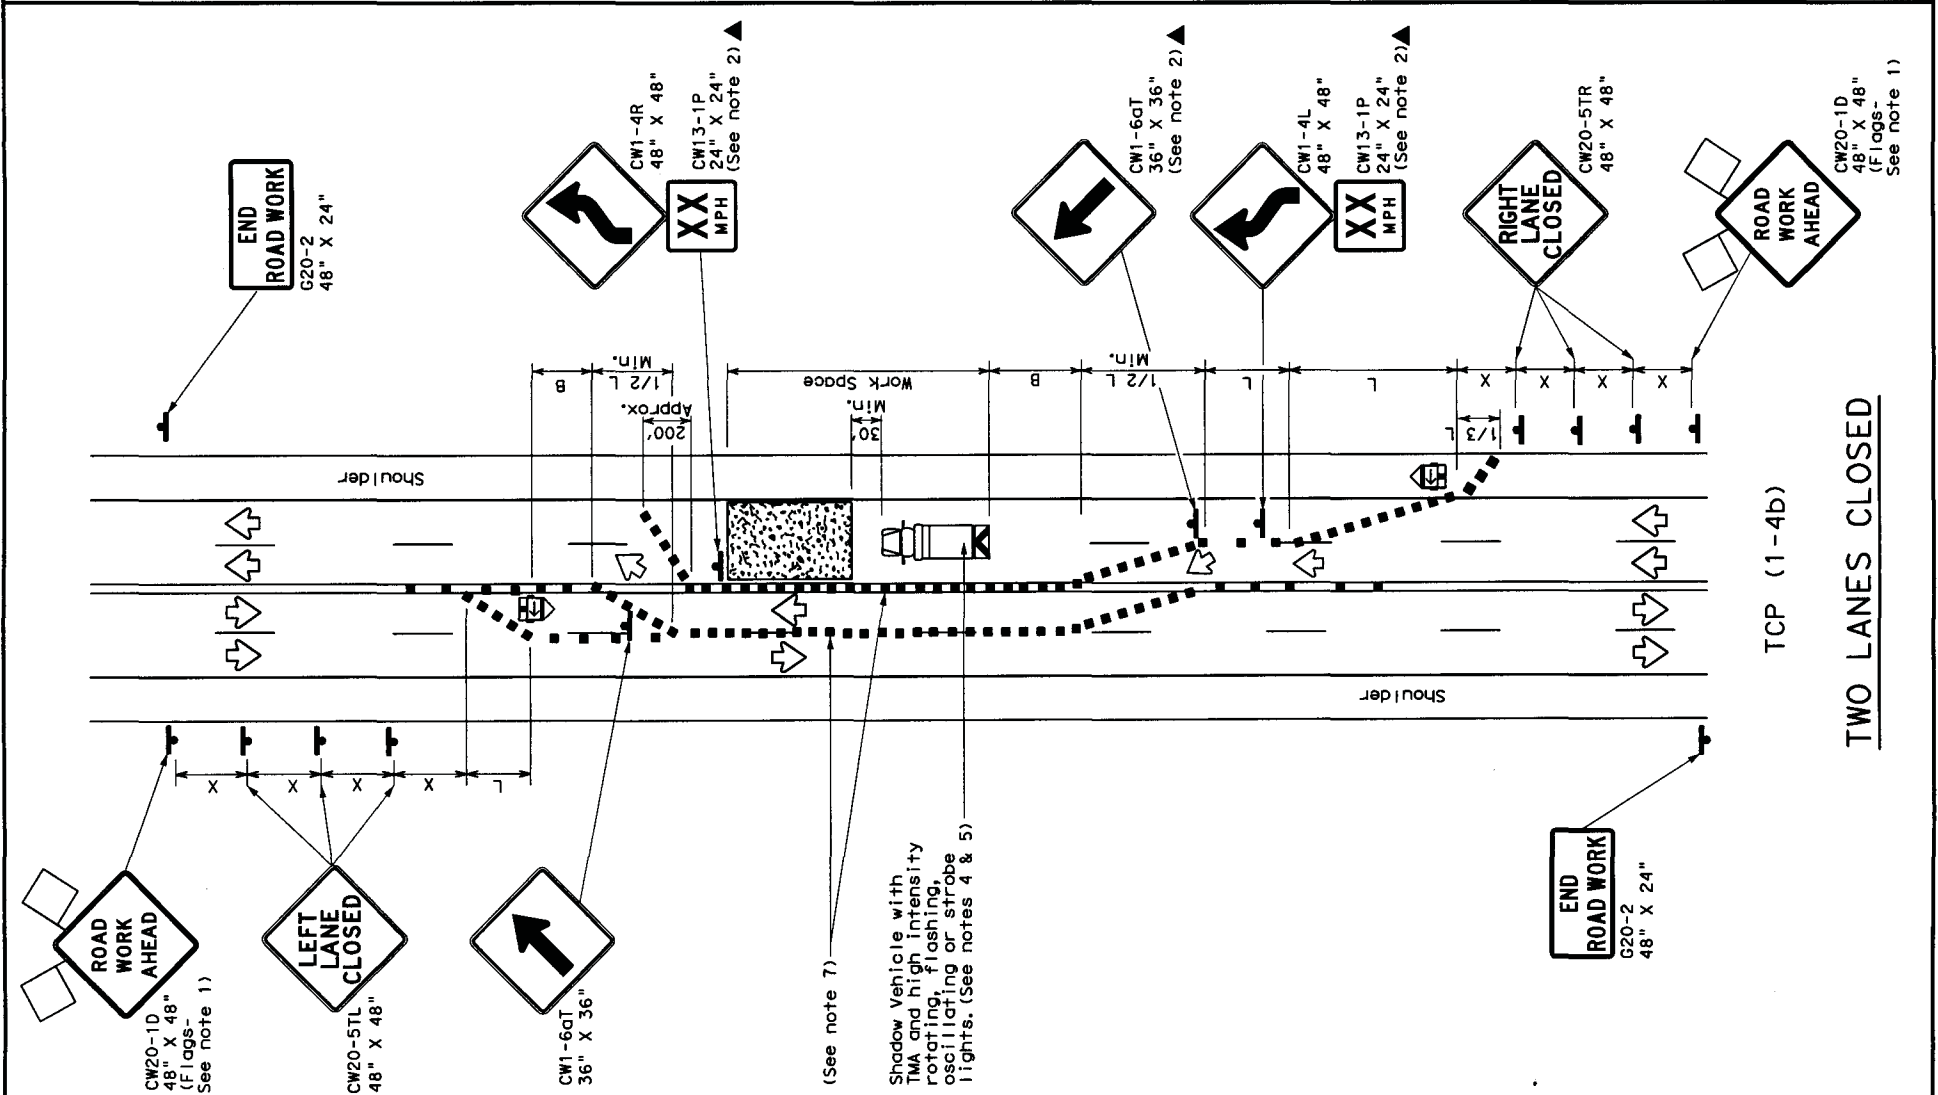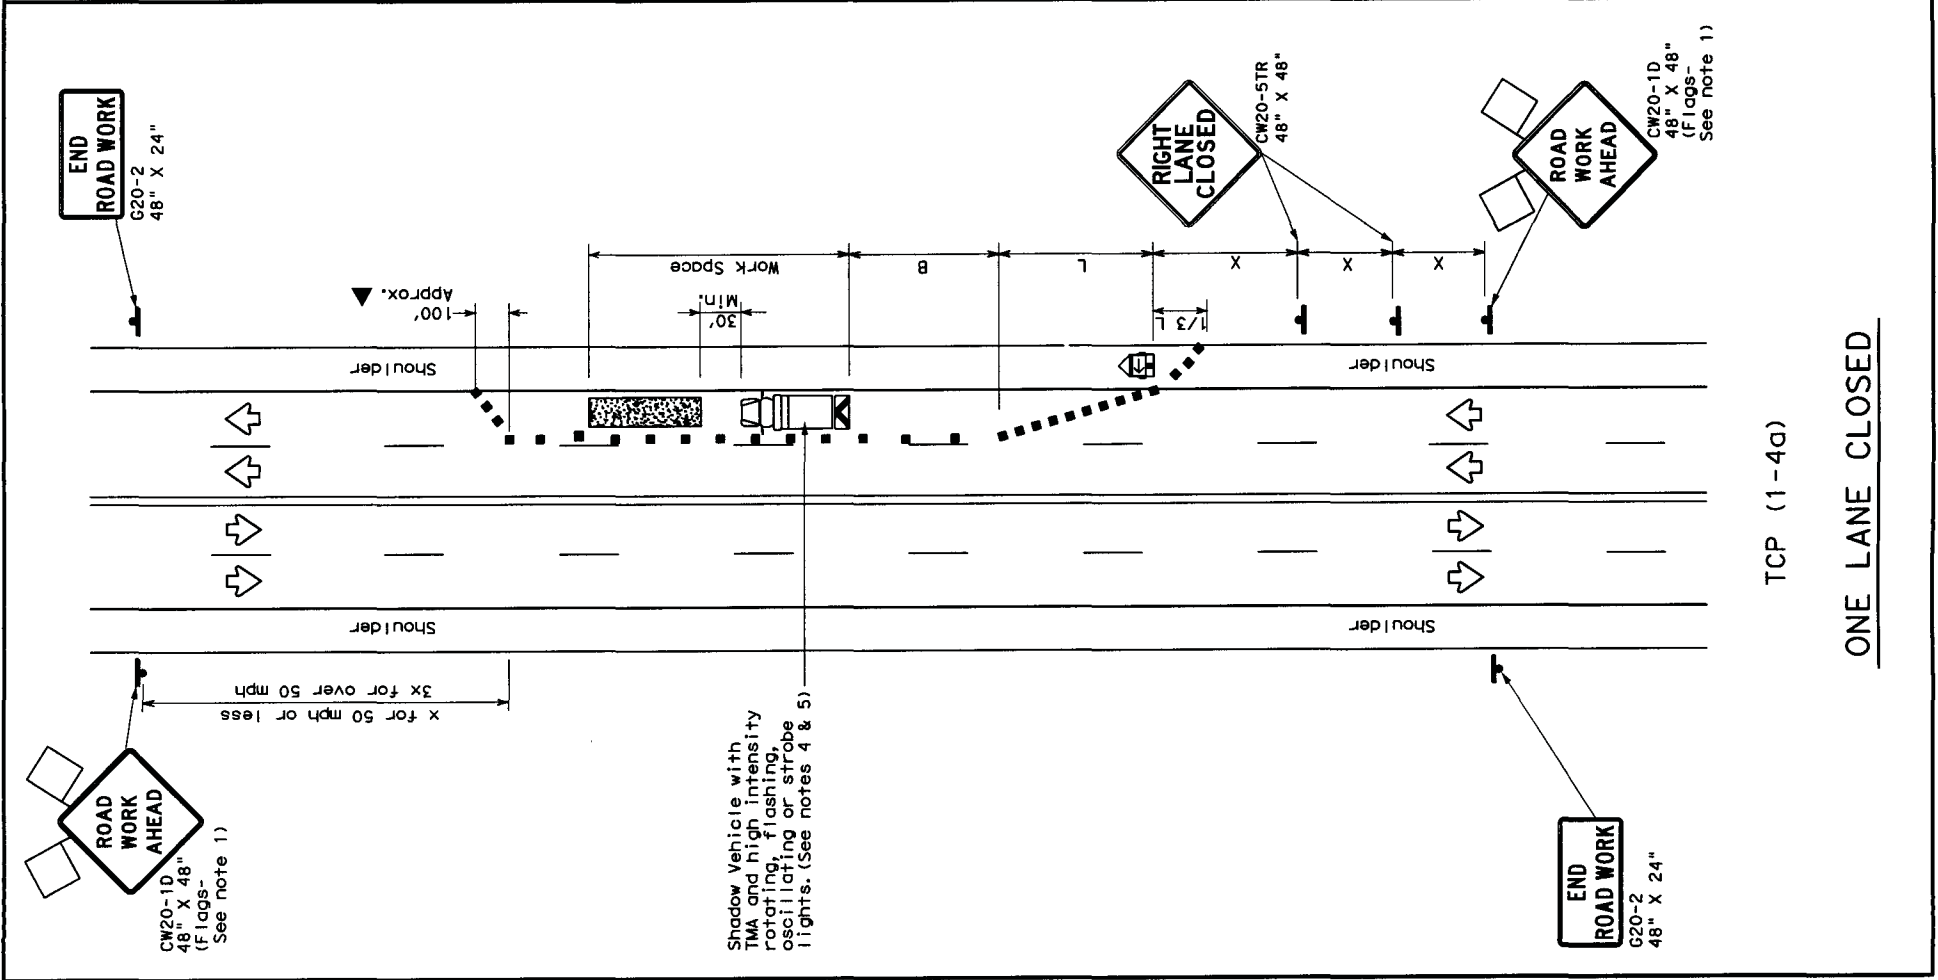

LEGEND

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **		Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X"	On a Tangent Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Tangent			
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45		330'	375'	420'	45'	90'	320'	195'
50		405'	465'	540'	50'	100'	400'	240'
55	$L = WS$	550'	605'	660'	55'	110'	500'	295'
60		630'	690'	750'	60'	120'	600'	350'
65		715'	780'	850'	65'	130'	700'	410'
70		805'	880'	960'	70'	140'	800'	475'
75		900'	990'	1080'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L-Length of Taper (FT) W-Width of Offset (FT) S-Posted Speed (MPH)

TYPICAL USAGE

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓			✓

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol which may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the visibility of the work zone is less than 1500 feet.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.

TCP (1-4Q)

- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline where needed to protect the work space from opposing traffic with the arrow panel placed in the closed lane near the end of the merging taper.

TCP (1-4B)

- Where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2S where S is the speed in mph. This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

For construction or maintenance contract work, specific project requirements for shadow vehicles can be found in the project GENERAL NOTES for item 502, Signs and Traffic Handling.

Texas Department of Transportation
Traffic Operations Division

TRAFFIC CONTROL PLAN
LANE CLOSURES ON MULTILANE CONVENTIONAL ROADS

TCP (1-4) - 12

© TxDOT December 1985

REV.	DATE	BY	CHK.	APP.	DESCRIPTION
2-94	1-12				REVISIONS
8-95					JOB
1-97					SECTION
4-98					DIST.
					COUNTY
					HIGHWAY
					SHEET NO.

154