

# PERFORMANCE TRUCK - BROOKSHIRE

34211 Katy Freeway, Brookshire, Texas 77423

Phone: (281) 239-7383

## BUYER'S ORDER

Date Prepared: 09-28-2023	Delivery Date: *1st Half 2024 Build	Salesman: Drew Vest	Branch: Brookshire
Purchaser: Fort Bend County		Telephone: 281-342-6185 Fax:	
Mailing Address: 301 Jackson City: Richmond State: TX Zip: 77469			County: Fort Bend
Physical Address: 201 Payne Lane City: Richmond State: TX Zip: 77469			County: Fort Bend
Description: NEW 2025 KENWORTH T880		Email Address: russell.hurta@fortbendcountytexas.gov	
Mileage:	Color: L0436EY Sierra Blue NOTE: Sales tax and license fee may apply but are not included in this quote.		
VIN: TO ORDER Comments: See attached vehicle summary, quote ID # QUO-979831-Z1V9X5.			
Purchaser's Agent: Russell Hurta		Title: GM Fleet Operations	License Type: Combination Account # Fort Bend

### LICENSE - TITLE INFORMATION

Months: 12	Tractor:	Truck: X	Trailer:	Body Type: DUMP	Color: BLU	Tons:	GCW: 54600
Apportioned:	IMC #	Combination: X	Com'l:	Token Trailer:	Gas:	Diesel: X	

### INSURANCE INFORMATION

AGENCY:	SELLING PRICE*	207,893.68
NAME:	PHONE:	ACCESSORIES

### LIEN INFORMATION

NAME:	LIEN DATE:	CASH PRICE W/ACCESS.	207,893.68
ADDRESS:	PHONE:	TRADE IN ALLOWANCE	-
CITY, STATE, ZIP:		NET CASH DIFFERENCE	207,893.68
COMMENTS:		FEDERAL RETAIL EXCISE TAX	-
AMOUNT:	NAME:	NET PRICE	207,893.68

### ADDITIONAL INFORMATION

This proposal is for up to 5 trucks to be built in 1st Half of 2024.	TITLE FEE (INCLUDES \$5 TAG FEE)	5.00
***Buy Board Contract 601-19***	COMMERCIAL INSPECTION FEE	-
2025 Kenworth T880 Dump Truck	DEALER'S INVENTORY TAX	461.32
Cummins X15 EPA Engine (450 HP) / Allison Auto Trans 6 Spd	DOCUMENTARY FEE**	75.00
15' Truck Fabricators Dump Bed w/ 3/16 Floor Material & Donovan Bullet	EXTENDED WARRANTY	5,160.00
Electric Tarp system primed/painted & installed.	SUBTOTAL	213,595.00
	BALANCE OWED ON TRADE	-
	SUBTOTAL	213,595.00
Ext Warranty for 5 yrs/100k mi on Engine, Aftertreatment & KW Base Veh.	PREPAYMENT	-
*Build slots currently in 1st Half of 2024. Delivery date tbd.	BALANCE DUE UPON DELIVERY	213,595.00

### DISCLAIMER OF WARRANTY

Any warranties on the products sold hereby are those made by the manufacturer. The seller, CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER, hereby expressly disclaims all warranties, either express or implied, including any implied warranty of merchantability or fitness for a particular purpose, and CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER neither assumes nor authorizes any other person to assume for it any liability in connection with the sale of said products.

### \* PRICE IS SUBJECT TO INDUSTRY AND ENVIRONMENTAL COST IMPACTS BEYOND THE CONTROL OF PERFORMANCE TRUCK

\*\* A DOCUMENTARY FEE IS NOT AN OFFICIAL FEE. A DOCUMENTARY FEE IS NOT REQUIRED BY LAW, BUT MAY BE CHARGED TO BUYERS FOR HANDLING DOCUMENTS RELATING TO THE SALE. A DOCUMENTARY FEE MAY NOT EXCEED A REASONABLE AMOUNT AGREED TO BY THE PARTIES. THIS NOTICE IS REQUIRED BY LAW.

Vehicle(s) are subject to prior sale and will not be held more than five working days.

PURCHASER \_\_\_\_\_

THIS ORDER NOT BINDING UNTIL ACCEPTED BY DEALER.

SALESPERSON \_\_\_\_\_

ACCEPTED BY \_\_\_\_\_



PERFORMANCE TRUCK - CLEVELAND (C359)  
1287 HIGHWAY 59 NORTH  
CLEVELAND, Texas 77328

FORT BEND COUNTY  
201 PAYNE LANE  
RICHMOND, Texas 77469  
United States of America

Drew Vest  
Cell Phone: 281-610-8007  
Office Phone: 713-844-7111  
Email: avest@performancetruck.com

RUSSELL HURTA  
Email:  
russell.hurta@fortbendcountytexas.gov

## Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	14600
Type:	FULL TRUCK	Rr Axle Load (lbs):	40000
Description 1:	T880 DUMP CHASSIS	G.C.W. (lbs):	54600
Description 2:	Allison		
Application		Road Conditions:	
Intended Serv.:	Construction: Vehicles used in the	Class A (Highway)	88
	cons		
Commodity:	Asphalt	Class B (Hwy/Mtn)	10
		Class C (Off-Hwy)	2
Body		Class D (Off-Road)	0
Type:	End Dump	Maximum Grade:	6
Length (ft):	15	Wheelbase (in):	194
Height (ft):	13.5	Overhang (in):	62
Max Laden Weight (lbs):	5000	Fr Axle to BOC (in):	74
		Cab to Axle (in):	120
Trailer		Cab to EOF (in):	182
No. of Trailer Axles:	0	Overall Comb. Length (in):	304.5
Type:			
Length (ft):	0	Special Req.	
Height (ft):	0	U.S. Domestic Registry, 50-state.	
Kingpin Inset (in):	0		
Corner Radius (in):	0		
Restrictions			
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

Note: All sales are F.O.B. designated plant of manufacture.

Sales Code	Std/ Opt	Description	Weight
<b>Model</b>			
0000810	S	<b>T880 Series Conventional</b>	<b>15,549</b>
0070060	S	<b>T880</b>	<b>0</b>
0072000	O	<b>Chassis Operation Will Not Incl. Stationary</b> application. Stationary operation is defined as running the engine under load while stationary at a substantial fraction of engine gross horsepower (60% or greater) for an extended period of time (longer than 5 - 10 minutes).	<b>0</b>
0080310	O	<b>EPA Clean Idle Label - Cummins Engines</b>	<b>0</b>
0090000	S	<b>Non-Sleeper w/ Rear Axle Capacity less than 59K.</b>	<b>0</b>
0098443	O	<b>State of Registry: Texas</b>	<b>0</b>
<b>Engine &amp; Equipment</b>			
0130349	O	<b>Cummins X15 450V 450@1900 1650@900, 2024</b> with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset ( N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 68....Maximum Accelerator Pedal Ve N09440 C234 YES...Engine Protection Shutdown ( N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 68....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume ( N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 120...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	<b>336</b>
1000046	O	<b>EPA Emissions Warranty Engine</b>	<b>0</b>
1000151	S	<b>PremierSpec</b>	<b>0</b>

Sales Code	Std/ Opt	Description	Weight
1000244	O	<b>Gearing Analysis: Balance</b> power/economy blend results.	0
1000254	O	<b>Customer's Typical Operating Spd: 65 MPH</b>	0
1000524		<b>RegistrationYear</b> Year of Registration: 2024	0
1000684	O	<b>Effective VSL Setting NA</b>	0
1000858	O	<b>Engine Idle Shutdown Timer Disabled</b>	0
1000859	O	<b>Enable EIST Ambient Temp Override</b>	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0
1002080	O	<b>Air Compressor: Cummins 18.7 CFM, Naturally</b> Aspirated for Cummins X15 engines	0
1051200	S	<b>Air Cleaner: Composite Firewall Mounted PACCAR or</b> Cummins Engines	0
1099080	O	<b>Pre-Cleaner Mounted in the Hood Plenum</b>	0
1105220	O	<b>Fan Hub: Horton 2-Speed for X15</b>	0
1123555	S	<b>Cooling module: 1330 square inches.</b> Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	<b>Bug Screen: Between Hood &amp; Grille</b>	2
1247263	S	<b>EXH: Single Can 2024 RH Under with RH</b> Side-of-Cab Vertical Tailpipe	0
1290124	O	<b>Tailpipe: 5 in. single 24 in. 45 degree curved.</b>	-3
1321109	O	<b>Fuel Filter:PACCAR Standard Service Interval</b> Fuel/Water Separator. 2017 and Later Emissions	0
1321205	S	<b>Run Aid:Fuel Heat</b> *For Fuel Filter	0
1321300	O	<b>Start Aid:None</b> *For Fuel Filter	0
1500029	O	<b>Kenworth Fuel Cooler</b> Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	6
1816260	O	<b>Alternator: PACCAR 160 amp, Brush Type</b>	0
1821225	O	<b>Batteries: 2 PACCAR GP31 Threaded Post (1000)</b> 2000 CCA starting.	-59
1836106	O	<b>Mitsubishi 105P55 12V Starter with Cummins and PX</b>	0

Sales Code	Std/ Opt	Description	Weight
		PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	
1840005	O	<b>Battery Disconnect Switches 2, Mounted On Battery Box.</b>	<b>2</b>
1840065	S	<b>12V Low Voltage Disconnect for Battery Protection</b>	<b>0</b>
1900996	O	<b>Jump Start Terminals Under Hood.</b>	<b>12</b>
1901017	S	<b>Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision</b>	<b>0</b>
<b>Transmission &amp; Clutch</b>			
2016612	O	<b>Transmission: Allison 4000RDS 6-speed, With PTO drive gear. No retarder. 6th Generation controls. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor &amp; heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 &amp; 4000 series transmissions.</b>	<b>478</b>
2405405	O	<b>Driveline: 2 Dana 1810 Heavy-Duty 1 Centerbearing</b> *Heavy duty is 1810HD series.	<b>68</b>
2410018	O	<b>Torque Converter Included W/ Allison Transmission.</b>	<b>0</b>
2410151	O	<b>Pushbutton Control Center Console Mounted.</b> Class 8 with Allison Transmission.	<b>0</b>
2410204	O	<b>Allison Fuel Sense: Delete</b>	<b>0</b>
2410244	O	<b>J1939 Park Brake Auto Neutral</b>	<b>0</b>
2410310	O	<b>Allison Neutral at Stop</b>	<b>0</b>
2429358	O	<b>Rear Transmission Support Springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.</b>	<b>0</b>
<b>Front Axle &amp; Equipment</b>			
2503473	O	<b>Dana Spicer D-1461W Front Axle rated 14.6K</b> 3-1/2in. drop, wide track for use with air disc brake only.	<b>0</b>
2647003	O	<b>Front Brakes: 14.6K Meritor EX+L Optimized</b> air disc brakes.	<b>0</b>
2690042	O	<b>U-Shaped Rotor for Meritor Air Disc Brakes.</b>	<b>0</b>
2702500	O	<b>Front Hub: Iron Hub Pilot 14,600 lbs.</b> 11-1/4 in. bolt circle. For use w/ air disc brakes. Consider wheelguards (5850002) w/ aluminum wheels.	<b>48</b>
2741970	S	<b>ConMet PreSet Plus Hub Package; Front Axle.</b>	<b>0</b>
2750001	S	<b>Hubcap: Front Vented.</b>	<b>0</b>

Sales Code	Std/Opt	Description	Weight
2769000	S	<b>Slack Adjusters Included W/ Front Axle or Brakes.</b> Also use with disc brakes.	0
2864019	O	<b>Front Springs: Taperleaf 14.6K W/ Shock Absorbers</b> 2-leaf. With maintenance-free elastomer spring pin bushings. Standard with rubber pins. Not available on W900L or W900S.	-101
2895101	O	<b>Single Power Steering Gear: 16K Sheppard SD110.</b>	-64
2899341	O	<b>Delete Standard Power Steering Cooler.</b>	-11
<b>Rear Axle &amp; Equipment</b>			
3122247	O	<b>Dual Meritor MT40-14x4 Hypoid Rear Axle</b> rated at 40K, with heavy-wall housing. Tandem rear axles.	-411
3200433	O	<b>Rear Axle Ratio - 4.33.</b>	0
3354007	O	<b>Dual Rear Brakes 16-1/2x7 in. to 46K;</b> Meritor Q- plus-extended service S-cam.	-24
3392005	O	<b>Dual Rear Brake Drums: Cast.</b> For use with 16.5X7" or 16.5X8.625" brake.	208
3407050	S	<b>Dual Rear Hubs: Aluminum Hub Pilot 46K;</b> 11.25" bolt circle. Requires "R" series outer ends.	0
3441972	S	<b>ConMet PreSet Plus Hub Package; Dual Rear Axle.</b>	0
3465002	O	<b>Tandem Rear Axle Automatic Slack Adjusters.</b> For use with drum brakes.	0
3485207	O	<b>Spring Brake: 3030 Long Stroke Dual 30 Square</b> inches travel. For drum brakes. Helps keep brakes in adjustment longer.	88
3495228	O	<b>Bendix 4S/4M Anti-Lock Brake System W/ Air</b> traction control (ATC).	2
3500037	O	<b>Interaxle Driveline:1 Dana 1710 Series</b> Tandem Rear Axels Only.	-12
3736418	O	<b>Rear suspension: Tandem Reyco 102 40K.</b> 4-spring multileaf & 52 in. axle spacing. Steel crossmembers & gussets. Unladen Height: 10.8 in. Laden Height: 9.2 in.	116
3830145	O	<b>Delete Standard Heavy-Duty Air Springs for Rear</b> suspension.	-28
<b>Tires &amp; Wheels</b>			
4038677	O	<b>Front tires: Goodyear G291 315/80R22.5 18PR.</b> 42.3 in. diameter, all position. 19.7 in. SLR.	162
4280104	O	<b>Rear tires: Continental HDL3 LTL 11R24.5 16PR</b>	200
4900008	O	<b>Rear Tire Quantity: 8</b>	0
5045283	O	<b>Front Wheel: Kenworth 7-spoke 88U68</b> 22.5x8.25 aluminum with Ultra One high polish finish, hub-pilot mount. 7300lb. maximum rating. Level 1 finish. Air disc brake compatible.	-40
5244193	O	<b>Rear Wheel: Kenworth 7-spoke 98U68</b>	-84

Sales Code	Std/ Opt	Description	Weight
		24.5x8.25 aluminum with Ultra One High Polish finish, hub-pilot mount. 7300lb. maximum rating. Air disc brake compatible. Code is priced per pair of wheels.	
5900008	O	<b>Rear Wheel/Rim Quantity: 8</b>	<b>0</b>
<b>Frame &amp; Equipment</b>			
6054400	O	<b>Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to</b> 285 in. to 336 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80, RBM is 1,776,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	<b>102</b>
6302361	O	<b>Bumper: Tapered Polished Aluminum Channel.</b> Requires a bumper setting code.	<b>-6</b>
6319485	S	<b>48.5 in. Bumper Setting. Requires a Bumper Code.</b>	<b>0</b>
6324025	O	<b>Front Tow Hook: Center Mounted, Cast.</b> Requires iron front drive brackets.	<b>28</b>
6390312	O	<b>Brackets: Iron Front Spring Drive. Included with</b> front spring capacity of 16,000 lbs or greater; code not required.	<b>47</b>
6391203	O	<b>Custom Frame Layout: 3-4 Chassis</b> CFL A/D: MOUNT AIR DRYERS CLEAR OF TRANSMISSION AREA	<b>0</b>
6400636	O	<b>Battery Box Cantilever Aluminum BOC with</b> fiberglass cover.	<b>8</b>
6409902	O	<b>Battery Box Location: RH Side.</b>	<b>15</b>
6451090	S	<b>T470,C5, T6, T8 Non-Polished DPF/SCR or CNG Cover</b> diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	<b>0</b>
6679856	O	<b>Final End-of-Frame Cut-Off Dimension Will be</b> modified to less than or equal to 45 in.	<b>0</b>
6721102	S	<b>Rear Mudflap Arms: Betts B-25 Standard-Duty,</b> straight. Includes B1732 mounting brackets as standard.	<b>0</b>
6722000	S	<b>Rear Mudflap Shields: White Plastic Antisail W/</b> Kenworth logo.	<b>0</b>
6734005	O	<b>Quarter Fenders: Stainless Steel W/ Painted Steel</b> brackets, single post mounted.	<b>55</b>
6742009	S	<b>Square End-of-Frame W/O Crossmember; Non-Towing.</b>	<b>0</b>
<b>Fuel Tanks &amp; Equip</b>			
7210090	O	<b>Fuel Tank: 90 US Gallon 24.5 in. Aluminum Under</b> replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	<b>-4</b>



Sales Code	Std/Opt	Description	Weight
7722153	S	<b>Small Round DEF Tank, 14 Gallons.</b> The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0
7831008	O	<b>6 in. Wide Lower Fuel Tank Step, for One 22 in.</b> or 24.5 in. tank LH.	2
7889203	S	<b>DEF to Fuel Fill Ratio 2:1 or Greater.</b>	0
7889245	S	<b>Anti-Siphon Device in Fuel Tank Filler Neck.</b> For any number of fuel tanks.	0
7889604	S	<b>DEF Tank Location is LH.</b>	0
7920090	O	<b>Location: 90 gal fuel tank LH under cab</b>	0
<b>Cab &amp; Equipment</b>			
8025301	S	<b>Cab: Stamped Aluminum Cab with Panoramic Curved</b> glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
8090604	O	<b>Hood: T880 Standard Length With Mechanically</b> Fastened Fenders. 122.6 inch BBC.	15
8108002	O	<b>Fine Particulate Filter for Cabin Air HVAC</b> system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	0
8108011	S	<b>Cab HVAC - Day Cab and 40 in. Sleeper</b> System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8201047	S	<b>Kenworth Smartwheel: 18 in. Non-Leather With</b> Integrated Radio and Cruise Controls.	0
8201051	O	<b>Column Mtd Retarder Control, RH Side</b> Use with Manual & Allison Transmissions Only.	0
8201200	S	<b>Adjustable Telescoping Tilt Steering Column.</b>	0
8203060	O	<b>5 Sets of Keys. Replaces Standard 2 Sets of Keys.</b>	0
8203191	O	<b>Customer Specified Tumbler P/N. All Chassis</b> keyed alike if applicable. Includes ignition, cab doors & if applicable, sleeper tool box door. 2.1m models. G key will not work on new P lock and ignition.	0
<b>Narr P0444</b>			



<b>Sales Code</b>	<b>Std/ Opt</b>	<b>Description</b>	<b>Weight</b>
8208495	O	<b>Two Spare Switches: Wired to Power.</b>	0
8208602	O	<b>Dash Switch: W/Light &amp; Guard for Truck Dump Gate.</b> Includes approximately 3 meters of coiled wire BOC in LH rail.	0
8221160	O	<b>Gauge: Engine Oil Temperature Gauge With Integral</b> warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	0
8222404	S	<b>Gauge: DD Virtual Gauge - Oil Temp Engine</b>	0
8222413	S	<b>Gauge: DD Virtual Gauge - Manifold</b> Pressure Boost	0
8222414	S	<b>Gauge: DD Virtual Gauge - Engine Percent</b> Torque	0
8222712	O	<b>Gauge: Fuel Filter Restriction Gauge.</b>	0
8222722	O	<b>Gauge: Manifold Pressure Gauge.</b> The NavPlus HD unit includes a virtual manifold pressure gauge.	0
8225658	O	<b>Gauge: Axle Oil Temperature, Dual-Drive Axle.</b> (2 gauges) w/integral warning light.	0
8226667	O	<b>Gauge: Oil Temperature Gauge Transmission.</b> The NavPlus HD unit includes a virtual transmission oil temperature gauge.	0
8282027	S	<b>Main Instrument Package: 15" Digital Display.</b> Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
8282108	O	<b>Modular Dash Options: RH Dash Storage Unit With</b> two shelves. Reduces total gauge count; HD by 6 and MD by 4.	0
8300008	S	<b>Interior Color: Slate Gray</b>	0
8330102	S	<b>Interior Package: Vantage Daycab</b> Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
8390634	S	<b>Rubber Floormat</b>	0
8410200	O	<b>Driver Seat: GT701 HB with Vinyl material.</b> The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	0
8480103	O	<b>Rider Seat: GT100 Toolbox IB with Vinyl Material.</b>	0

Sales Code	Std/ Opt	Description	Weight
		The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	
8490181	S	<b>Seat Color: Black</b>	0
8496559	O	<b>Driver and Rider Seat Belts: Orange Seat Belts.</b> Replacing standard color.	0
8601432	O	<b>Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth</b>	0
8698974	S	<b>Base Level Audio System - Daycab:High Performance</b> Door Speakers.	0
8700197	S	<b>Turn Signal: Non-Self Cancelling</b>	0
8700283	S	<b>LH and RH Trip Ledge Rain Deflectors</b>	0
8700663	S	<b>Kenworth TruckTech+:</b> This system provides the World's Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This is standard on all Kenworth models with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine.	0
8800382	O	<b>Grabhandle: LH SOC Non-Slip Ergonomic</b> Grab Handle Mounted To The Left Hand Exterior Of The Cab For Entry and Exit. NFPA Compliant.	3
8800402	S	<b>Dual Cab Interior Grabhandles: A Pillar Mounted</b> Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	<b>Kenworth Daylite Door With Standard LH/RH</b> electric door locks and LH/RH electric window controls.	0
8841411	S	<b>Single Air Horn Under Cab.</b>	0
8850139	S	<b>Look-Down, Pass. Door, Black 11x6</b>	0
8865002	S	<b>Aero Mirror: Dual Kenworth Aerodynamic Motorized</b> heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871446	S	<b>Rear Cab Stationary Window 19in x 36in</b>	0
8890101	S	<b>One-Piece Bonded-In Windshield With Curved Glass.</b> Standard.	0
8890349	S	<b>Wheelwell Fender Extension: 2.5 Inches</b>	0
8890876	S	<b>Kenworth Cab/Sleeper Air Suspension.</b>	0
<b>Lights &amp; Instruments</b>			
9010553	S	<b>Headlamps: SAE Dual Halogen Complex Reflector</b>	0
9022137	S	<b>Marker Lights: Five, Rectangular, LED</b>	0

Sales Code	Std/ Opt	Description	Weight
9030016	S	<b>Turn Signal Lights: Flush Mounted LED. Mounted at top of fender wheel arc.</b>	0
9030052	S	<b>LED Stop, Turn, Tail: With Two LED Backup Lights and With An LED License Plate.</b>	0
9090027	O	<b>Headlamps to Turn on When Wipers are Active.</b>	0
9090039	S	<b>Marker Lights: Interrupter Switch.</b> Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
9090052	O	<b>Brake Lights on when Engine Brake Active.</b> Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090126	O	<b>Electric Backup Alarm: Meets SAE J994 &amp; OSHA requirements.</b>	4
9090316	O	<b>Junction Box: End of Frame</b>	1
9090849	O	<b>Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.</b>	0
<b>Air Equipment</b>			
9101218	S	<b>Air Dryer: Bendix AD-HF Puraguard Heated</b>	0
9108001	S	<b>Moisture Ejection Valve W/ Pull Cable Drain.</b>	0
9140020	S	<b>Nylon Air Tubing in Frame &amp; Cab, Excluding Hoses subject to excessive heat or flexing.</b>	0
<b>Extended Warranty</b>			
9200021	S	<b>Base Warranty - Standard Service Heavy Duty</b> 12 months / 100,000 miles / 160,000 km.	0
9201828	O	<b>EW: US Basic Vehicle 5 year/100,000 miles, United States only.</b>	0
9203776	O	<b>Cummins EW: Protect Plan 1 X15 EPA24</b> 5YR/100K (160,935KM), Efficiency/Productivity Series. Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	0
9203810	O	<b>Cummins EW: Aftertreatment X15 Use W/ PP1 EPA24</b> 5YR/100K (160,935KM), Efficiency/Productivity Series. Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	0
9212651	O	<b>TruckTech+ RD - 3YR Sub Cummins Engines</b>	0
9220001	O	<b>Base Warranty: Emissions</b> 5YR/100K MI - EPA Engine	0
<b>Miscellaneous</b>			
9409852	O	<b>GHG Secondary Manufacturer: Does Not Apply</b>	0

<b>Sales Code</b>	<b>Std/ Opt</b>	<b>Description</b>	<b>Weight</b>
9490206	O	<b>Warning Triangle Reflector Kit: Shipped Loose.</b> Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	<b>4</b>
9490404	O	<b>One 5 lb. Dry Chemical Type Fire Extinguisher</b> mounted outboard of driver seat. Class ABC.	<b>11</b>
9491659	S	<b>VMUX Architecture</b>	<b>0</b>
<b>Promotions</b>			
<b>Paint</b>			
9700000	O	<b>Paint Color Number(s).</b>  N9702 A - L0436 SIERRA BLUE N9720 FRAME N0001 BLACK	<b>0</b>
9943004	O	<b>Bumper Unpainted</b>	<b>0</b>
9943050	O	<b>Day Cab Standard Paint</b>	<b>0</b>
9944820	S	<b>1 - Color Paint - Day Cab</b> Color will be White if no other color is specified.	<b>0</b>
9960003	O	<b>Non-Standard Paint Color.</b>	<b>0</b>
9965510	S	<b>Base Coat/ Clear Coat.</b> The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	<b>0</b>

### Special Requirements

Special Requirement 1 0098025  
Special Requirement 2  
Special Requirement 3  
Special Requirement 4

### Order Comments

Total Weight

16,725

## Prices and Specifications Subject to Change Without Notice.

---


Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

---


### **PRICING DISCLAIMER**

*While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information*

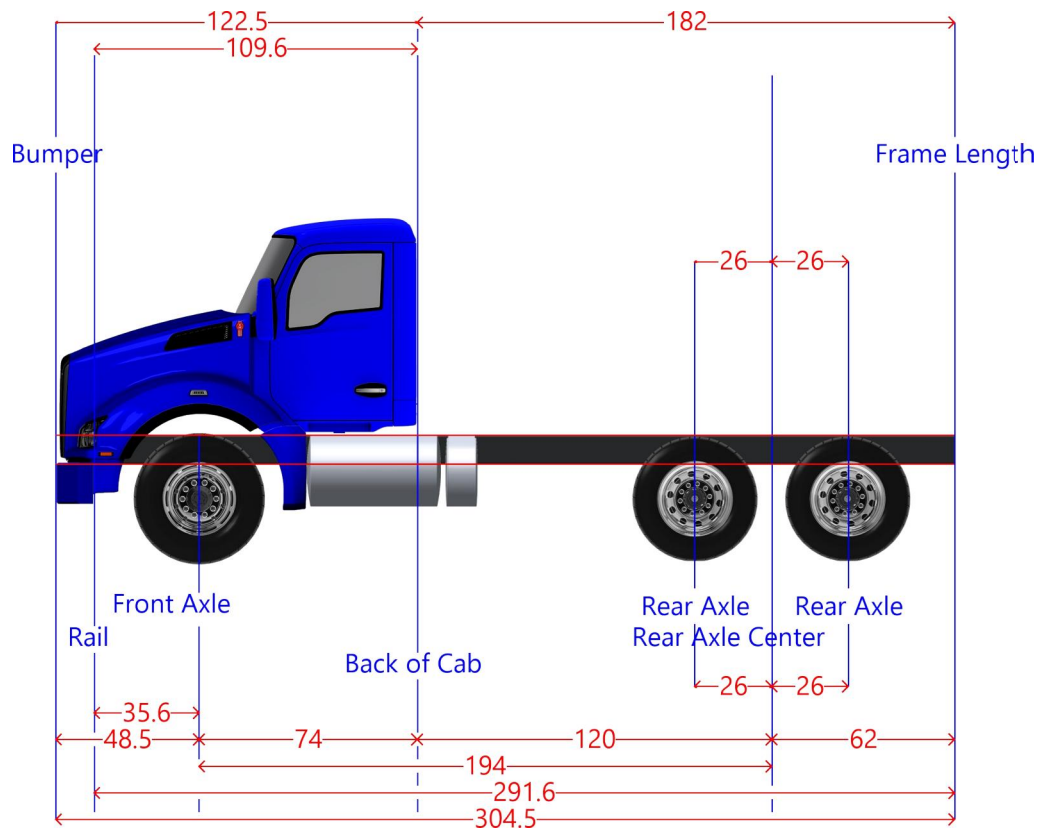

Dimension	Measurement	Start	End
Axle Spacing	52	168	220
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	182.0	74	256
Cab to Rear Axle	120.0	74	194
Effective Bumper to Back Of Cab	122.5	-48.5	74
Frame Length	291.6	-35.6	256
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	182.0	74	256
Overall Length	304.5	-48.5	256
Overhang	62.0	194	256
Pusher Offset #1	26.0	168	194
Pusher Offset #2	26.0	168	194
Pusher Offset #3	26.0	168	194
Tag Offset	26.0	194	220
Wheelbase	194	0	194

FRAME LAYOUT

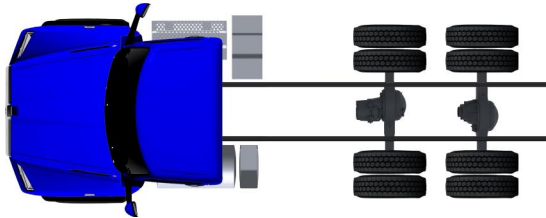

**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

Selected Options (Wheelbase: 194)

Sales Code	Description	Length	Side
7210090	Fuel Tank: 90 US Gallon 24.5 in. Aluminum Under	45.5	Left
7722153	Small Round DEF Tank, 14 Gallons.	10.2	Left
6400636	Battery Box Cantilever Aluminum BOC with	17.3	Right