

# PERFORMANCE TRUCK - BROOKSHIRE

34211 Katy Freeway, Brookshire, Texas 77423

Phone: (281) 239-7383

## BUYER'S ORDER

Date Prepared: 09-28-2023	Delivery Date: *1st Half 2024 Build	Salesman: Drew Vest	Branch: Brookshire
Purchaser: Fort Bend County		Telephone: 281-342-6185 Fax:	
Mailing Address: 301 Jackson City: Richmond State: TX Zip: 77469			County: Fort Bend
Physical Address: 201 Payne Lane City: Richmond State: TX Zip: 77469			County: Fort Bend
Description: NEW 2025 KENWORTH T880		Email Address: russell.hurta@fortbendcountytexas.gov	
Mileage:	Color: L0436EY Sierra Blue NOTE: Sales tax and license fee may apply but are not included in this quote.		
VIN: TO ORDER Comments: See attached vehicle summary, quote ID # QUO-979824-F2N6K6.			
Purchaser's Agent: Russell Hurta		Title: GM Fleet Operations	License Type: Combination Account # Fort Bend

### LICENSE - TITLE INFORMATION

Months: 12	Tractor: X	Truck:	Trailer:	Body Type: N/A	Color: BLU	Tons:	GCW: 80000
Apportioned:	IMC #	Combination: X	Com'l:	Token Trailer:	Gas:	Diesel: X	

### INSURANCE INFORMATION

AGENCY:	SELLING PRICE*	210,293.36
NAME: PHONE:	ACCESSORIES	-
LIEEN INFORMATION	CASH PRICE W/ACCESS.	210,293.36
NAME: LIEN DATE:	TRADE IN ALLOWANCE	-
ADDRESS: PHONE:	NET CASH DIFFERENCE	210,293.36
CITY, STATE, ZIP:	FEDERAL RETAIL EXCISE TAX	-
COMMENTS:	NET PRICE	210,293.36
AMOUNT: NAME:	STATE SALES TAX	-

### ADDITIONAL INFORMATION

This proposal is for 1 truck to be built in 1st Half of 2024.	TITLE FEE (INCLUDES \$5 TAG FEE)	5.00
***Buy Board Contract 601-19***	COMMERCIAL INSPECTION FEE	-
2025 Kenworth T880 Tandem Axle Haul Tractor	DEALER'S INVENTORY TAX	466.64
Cummins X15 EPA Engine (450 HP) / Allison Auto Trans 6 Spd	DOCUMENTARY FEE**	75.00
Rig Up pricing included - Full Fenders, Headache Rack, Tool Box, Rear	EXTENDED WARRANTY	5,160.00
Frame back plate w/ roller & ramps for 5th wheel	SUBTOTAL	216,000.00
	BALANCE OWED ON TRADE	-
	SUBTOTAL	216,000.00
Ext Warranty for 5 yrs/100k mi on Engine, Aftertreatment & KW Base Veh.	PREPAYMENT	-
*Build slot currently in 1st Half of 2024. Delivery date tbd.	BALANCE DUE UPON DELIVERY	216,000.00

### DISCLAIMER OF WARRANTY

Any warranties on the products sold hereby are those made by the manufacturer. The seller, CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER, hereby expressly disclaims all warranties, either express or implied, including any implied warranty of merchantability or fitness for a particular purpose, and CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER neither assumes nor authorizes any other person to assume for it any liability in connection with the sale of said products.

### \* PRICE IS SUBJECT TO INDUSTRY AND ENVIRONMENTAL COST IMPACTS BEYOND THE CONTROL OF PERFORMANCE TRUCK

\*\* A DOCUMENTARY FEE IS NOT AN OFFICIAL FEE. A DOCUMENTARY FEE IS NOT REQUIRED BY LAW, BUT MAY BE CHARGED TO BUYERS FOR HANDLING DOCUMENTS RELATING TO THE SALE. A DOCUMENTARY FEE MAY NOT EXCEED A REASONABLE AMOUNT AGREED TO BY THE PARTIES. THIS NOTICE IS REQUIRED BY LAW.

Vehicle(s) are subject to prior sale and will not be held more than five working days.

PURCHASER \_\_\_\_\_

THIS ORDER NOT BINDING UNTIL ACCEPTED BY DEALER.

SALESPERSON \_\_\_\_\_

ACCEPTED BY \_\_\_\_\_



PERFORMANCE TRUCK - CLEVELAND (C359)  
1287 HIGHWAY 59 NORTH  
CLEVELAND, Texas 77328

FORT BEND COUNTY  
201 PAYNE LANE  
RICHMOND, Texas 77469  
United States of America

Drew Vest  
Cell Phone: 281-610-8007  
Office Phone: 713-844-7111  
Email: avest@performancetruck.com

RUSSELL HURTA  
Email:  
russell.hurta@fortbendcountytx.gov

## Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	13200
Type:	TRACTOR	Rr Axle Load (lbs):	40000
Description 1:	T880 Haul Tractor	G.C.W. (lbs):	80000
Description 2:	Allison		
Application		Road Conditions:	
Intended Serv.:	Linehaul. Vehicles (trucks or tractors)	Class A (Highway)	90
Commodity:	General Freight	Class B (Hwy/Mtn)	10
		Class C (Off-Hwy)	0
Body		Class D (Off-Road)	0
Type:		Maximum Grade:	6
Length (ft):	0	Wheelbase (in):	185
Height (ft):	0	Overhang (in):	60
Max Laden Weight (lbs):	0	Fr Axle to BOC (in):	74
Trailer		Cab to Axle (in):	111
No. of Trailer Axles:	2	Cab to EOF (in):	171
Type:	Flatbed	Overall Comb. Length (in):	857.5
Length (ft):	53	Special Req.	
Height (ft):	12	U.S. Domestic Registry, 50-state.	
Kingpin Inset (in):	12		
Corner Radius (in):	2		
Restrictions			
Length (ft):	75		
Width (in):	102		
Height (ft):	13.5		

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

Note: All sales are F.O.B. designated plant of manufacture.

Sales Code	Std/ Opt	Description	Weight
<b>Model</b>			
0000810	S	<b>T880 Series Conventional</b>	<b>15,549</b>
0070060	S	<b>T880</b>	<b>0</b>
0080310	O	<b>EPA Clean Idle Label - Cummins Engines</b>	<b>0</b>
0090000	S	<b>Non-Sleeper w/ Rear Axle Capacity less than 59K.</b>	<b>0</b>
0098443	O	<b>State of Registry: Texas</b>	<b>0</b>
<b>Engine &amp; Equipment</b>			
0130349	O	<b>Cummins X15 450V 450@1900 1650@900, 2024</b> with Intebrate, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset ( N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 70....Maximum Accelerator Pedal Ve N09440 C234 YES...Engine Protection Shutdown ( N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 70....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume ( N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 120...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	<b>336</b>
1000046	O	<b>EPA Emissions Warranty Engine</b>	<b>0</b>
1000151	S	<b>PremierSpec</b>	<b>0</b>
1000244	O	<b>Gearing Analysis: Balance</b> power/economy blend results.	<b>0</b>
1000255	O	<b>Customer's Typical Operating Spd: 68 MPH</b>	<b>0</b>
1000524		<b>RegistrationYear</b>	<b>0</b>

Price Level: January 1, 2024

Deal: T880 Haul Tractor

Printed On: 9/28/2023 6:38:27 AM

Date: September 28, 2023

Quote Number: QUO-979824-F2N6K6

Sales Code	Std/Opt	Description	Weight
		Year of Registration: 2024	
1000683	O	<b>Effective VSL Setting 65.0 MPH or Greater (USA)</b>	0
1000858	O	<b>Engine Idle Shutdown Timer Disabled</b>	0
1000859	O	<b>Enable EIST Ambient Temp Override</b>	0
1000891	O	<b>Eff EIST NA Expiration Miles</b> Use only with MX and Cummins engines	0
1002080	O	<b>Air Compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 engines</b>	0
1051200	S	<b>Air Cleaner: Composite Firewall Mounted PACCAR or Cummins Engines</b>	0
1099080	O	<b>Pre-Cleaner Mounted in the Hood Plenum</b>	0
1105220	O	<b>Fan Hub: Horton 2-Speed for X15</b>	0
1123555	S	<b>Cooling module: 1330 square inches.</b> Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0
1160208	O	<b>Bug Screen: Between Hood &amp; Grille</b>	2
1247264	O	<b>EXH: Single Can 2024 RH Under with Single Vertical RH Back-of-Cab Tailpipe</b>	-422
1290124	O	<b>Tailpipe: 5 in. single 24 in. 45 degree curved.</b>	-3
1321110	O	<b>Fuel Filter:PACCAR Extended Service Interval Fuel/Water Separator, 2017 and Later Emissions</b>	0
1321205	S	<b>Run Aid:Fuel Heat</b> *For Fuel Filter	0
1321305	S	<b>Start Aid:12V Heat</b> *For Fuel Filter	0
1816260	O	<b>Alternator: PACCAR 160 amp, Brush Type</b>	0
1821210	S	<b>Batteries: 3 PACCAR GP31 Threaded Post (700-730)</b> 2100-2190 CCA dual purpose.	0
1836103	O	<b>PACCAR Premium 12V Starter W/ Cummins X15 Engines</b> PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system with circuit protection circuits number & color coded.	0
1840005	O	<b>Battery Disconnect Switches 2, Mounted On Battery Box.</b>	2
1840065	S	<b>12V Low Voltage Disconnect for Battery Protection</b>	0
1900996	O	<b>Jump Start Terminals Under Hood.</b>	12
1901019	O	<b>Remote PTO/Throttle, 12-Pin, 250K End of Frame, J1939, Remote Control Provision</b>	0

Price Level: January 1, 2024

Deal: T880 Haul Tractor

Printed On: 9/28/2023 6:38:27 AM

Date: September 28, 2023

Quote Number: QUO-979824-F2N6K6

Sales Code	Std/Opt	Description	Weight
<b>Transmission &amp; Clutch</b>			
2016627	O	<b>Transmission: Allison 4500RDS 6-speed, With PTO</b> drive gear. No Retarder. 6th Generation controls. For vocational applications. Includes shift control, transmission oil temperature gauge, oil level sensor & heat exchanger. Transynd transmission fluid is standard on all Allison 1000, 2000, 3000 & 4000 series transmissions.	478
2408502	O	<b>Driveline: 2 Meritor RPL25 SD; 1 Centerbearing</b>	114
2410018	O	<b>Torque Converter Included W/ Allison Transmission.</b>	0
2410151	O	<b>Pushbutton Control Center Console Mounted.</b> Class 8 with Allison Transmission.	0
2410204	O	<b>Allison Fuel Sense: Delete</b>	0
2410244	O	<b>J1939 Park Brake Auto Neutral</b>	0
2410310	O	<b>Allison Neutral at Stop</b>	0
2429378	O	<b>Customer Installed Transmission PTO in the LH</b> Mounted position (8 o'clock) for Allison 3000 & 4000 transmissions.	0
<b>Front Axle &amp; Equipment</b>			
2502017	O	<b>Dana Spicer D-1321IL Front Axle rated 13.2K</b> 3.5" drop. Use With Air Disc Brakes Only	-194
2607011	O	<b>Front Brakes: 14.6K Bendix RSD ADB22X Disc Brake.</b>	0
2690024	S	<b>Splined Rotor for Front Air Disc Brakes for Use</b> with Aluminum Hubs.	0
2701300	O	<b>Front Hub: Aluminum Hub Pilot 13,200 lbs.</b> 10-Bolt, 11-1/4 in. bolt circle .	0
2741970	S	<b>ConMet PreSet Plus Hub Package; Front Axle.</b>	0
2750001	S	<b>Hubcap: Front Vented.</b>	0
2769000	S	<b>Slack Adjusters Included W/ Front Axle or Brakes.</b> Also use with disc brakes.	0
2864012	O	<b>Front Springs: Taperleaf 13.2K W/ Shock Absorbers</b> w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins. Not available on W900L.	-117
2895221	O	<b>Single Power Steering Gear: 13.2K Sheppard HD94.</b>	-73
2899336	S	<b>Power Steering Cooler: Radiator Mounted Air-to-Oil</b>	0
2900615	O	<b>Threaded Bushings for Taperleaf Springs</b> 12K - 14.6K replacing rubber: T6/T8, W900B, W990. W9L gets as standard: code not required. Not available with W9S. 13K - 14.6K for T370.	0

Sales Code	Std/ Opt	Description	Weight
<b>Rear Axle &amp; Equipment</b>			
3122250	O	<b>Dual Meritor MP40-14x3 Rear Axle rated at 40K.</b> Tandem rear axles with pump.	-441
3200390	O	<b>Rear Axle Ratio - 3.90.</b>	0
3306014	O	<b>Dual Rear Brakes Bendix RSD-Compliant ADB22X</b> Disc brake for tandem axle, Max GAWR 46k.	0
3392604	S	<b>Splined Rotor for Dual Rear Air Disc Brake for</b> use with aluminum hubs.	0
3407050	S	<b>Dual Rear Hubs: Aluminum Hub Pilot 46K;</b> 11.25" bolt circle. Requires "R" series outer ends.	0
3441972	S	<b>ConMet PreSet Plus Hub Package; Dual Rear Axle.</b>	0
3465900	S	<b>Rear Slack Adjusters Included W/ Axle or Air</b> disc brakes.	0
3485002	S	<b>Spring Brakes Included W/ Dual Rear Air Disc</b> brakes.	0
3495225	O	<b>FMVSS-136 Stability Control Schedule Review</b> Chassis meets FMVSS-136 requirements and must be equipped with Electronic Stability Control. Reference Option code placed on order.	0
3495229	O	<b>Bendix 4S/4M Anti-Lock Brake System W/ Air</b> traction control (ATC) & electronic stability program (ESP) for tractor.	11
3500058	S	<b>Interaxle Driveline: 1 Meritor RPL20</b> Replacing I/A *Use W/ RPL(SD) 25 Main D/L	0
3511420	O	<b>Driver Controlled Differential Lock (Crosslock)</b> for Meritor Axles 40K to 52K forward rear & rear rear axle. Under Speed Interlock is standard on T680.	39
3730032	O	<b>Rear suspension: Tandem Kenworth Airglide 400 40K</b> 54 in. axle spacing. Air suspension w/ 9 in. ride height. Includes air suspension dump valve.	-134
3830145	O	<b>Delete Standard Heavy-Duty Air Springs for Rear</b> suspension.	-28
3839002	O	<b>Air Suspension Over-Inflation Valve W/ Warning</b> light to temporarily raise the frame.	0
<b>Tires &amp; Wheels</b>			
4038823	O	<b>Front tires: Goodyear Endurance LHS 11R22.5 16PR</b>	0
4280057	O	<b>Rear tires: Continental HDR2+ 11R22.5 14PR</b>	176
4900008	O	<b>Rear Tire Quantity: 8</b>	0
5045283	O	<b>Front Wheel: Kenworth 7-spoke 88U68</b> 22.5x8.25 aluminum with Ultra One high polish finish, hub-pilot mount. 7300lb. maximum rating. Level 1 finish. Air disc brake compatible.	-40
5245285	O	<b>Rear Wheel: Kenworth 7-spoke Alcoa alum 88U68/</b> Accuride 51487 22.5x8.25. Aluminum with Ultra One High Polish finish outside/steel Steel Armor[™] powder coat inside, hub-pilot mount.	-160

Sales Code	Std/Opt	Description	Weight
		7400 lb. maximum rating. 5-hand hole. Includes wheel guards. Air disc brake compatible. Code is priced per pair of wheels.	
5900008	O	<b>Rear Wheel/Rim Quantity: 8</b>	<b>0</b>
<b>Frame &amp; Equipment</b>			
6056200	S	<b>Frame Rails: 10-3/4 x 3-1/2 x 3/8in. Steel to</b> 284 in. Truck frame weight is 3.48 lb.-in. per pair of rails. Section modulus is 17.80, RBM is 2,132,000 in.-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	<b>229</b>
6302361	O	<b>Bumper: Tapered Polished Aluminum Channel.</b> Requires a bumper setting code.	<b>-6</b>
6319485	S	<b>48.5 in. Bumper Setting. Requires a Bumper Code.</b>	<b>0</b>
6324025	O	<b>Front Tow Hook: Center Mounted, Cast.</b> Requires iron front drive brackets.	<b>28</b>
6390001	O	<b>Steel Shackle Links.</b>	<b>8</b>
6390312	O	<b>Brackets: Iron Front Spring Drive. Included with</b> front spring capacity of 16,000 lbs or greater; code not required.	<b>47</b>
6391201	O	<b>Custom Frame Layout: One Chassis</b> CFL F/T: FUEL TANKS AS FAR FORWARD AS POSSIBLE CFL A/D: INSIDE FRAME BOC CFL A/T: CLEAR OF TRANSMISSION AREA CFL BBX: STANDARD CFL DEF: AS FAR FORWARD AS POSSIBLE CFL C/M: STANDARD	<b>0</b>
6397001	O	<b>Huck Bolts Throughout Frame, where Possible.</b>	<b>0</b>
6400636	O	<b>Battery Box Cantilever Aluminum BOC with</b> fiberglass cover.	<b>8</b>
6409902	O	<b>Battery Box Location: RH Side.</b>	<b>15</b>
6410010	O	<b>Frame Access Grabhandle(s) LH Mounted. Placement</b> and quantity of grabhandles may vary due to FMCSR frame access requirements.	<b>2</b>
6410092	O	<b>Frame Access Grabhandle Horizontal Mounted at</b> midpoint of sleeper or Daycab.	<b>2</b>
6414006	O	<b>Full Coverage Deck Plate. Up to and Incl 72 in.</b> of aluminum frame access deck plate filling the space from hoses to fifth wheel.	<b>24</b>
6451090	S	<b>T470,C5, T6, T8 Non-Polished DPF/SCR or CNG Cover</b> diamond plate w/ step. For use w/ 2010 or later exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. End plates will be painted standard black frame color.	<b>0</b>



Sales Code	Std/ Opt	Description	Weight
6543957	O	<b>Fifth Wheel: ILS&gt;40K air Hol FW35M912XL00 12 in.</b> slide, 9 in. height. Outboard mounting angles, 55K vertical rating, LH release. Air slide control valve standard in dash. Accommodates a 2 in. SAE kingpin. Requires some style of trailer connections.	521
6602010	O	<b>Fifth Wheel Ramps. Requires Standard or Short</b> tractor taper bent and weld.	22
6679914	O	<b>Any Changes to Rear Cab/Sleeper Area Must Comply</b> w/FMCSR 399.	0
6679915	O	<b>Customer-Installed Bulkhead and/or Headache</b> rack.	0
6680000		<b>FifthWheelSetting</b> FW rear/fixed setting ahd of bogie 0 in indicates rearmost setting measured forward from centerline of tandem or single rear axle	0
6721102	S	<b>Rear Mudflap Arms: Betts B-25 Standard-Duty,</b> straight. Includes B1732 mounting brackets as standard.	0
6722000	S	<b>Rear Mudflap Shields: White Plastic Antisail W/</b> Kenworth logo.	0
6745270	O	<b>Top Flange of Rear Frame Bent &amp; Welded W/</b> crossmember. Non-towing end-of-frame configuration.	17
6747000	O	<b>Shortest End-of-Frame Cutoff With Specified</b> end-of-frame configuration. Selecting this code will override the overhang dimension found in the Vocational Analysis of the sales tool.	0

### Fuel Tanks & Equip

7210135	O	<b>Fuel Tank: 135 US Gallon 24.5 in. Aluminum Under</b> replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck. A third tank support is required with this tank unless heavy-duty 7 in. wide supports are specified.	63
7722154	O	<b>Medium Round DEF Tank, 23.8 Gallons.</b> The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	15
7839400	O	<b>Extended Steps on Fuel Tank LH Under for Access;</b> 2 steps, 1 tank.	2
7889203	S	<b>DEF to Fuel Fill Ratio 2:1 or Greater.</b>	0
7889245	S	<b>Anti-Siphon Device in Fuel Tank Filler Neck.</b> For any number of fuel tanks.	0
7889604	S	<b>DEF Tank Location is LH.</b>	0
7920135	O	<b>Location: 135 gal fuel tank LH under cab</b>	0

### Cab & Equipment

8025301	S	<b>Cab: Stamped Aluminum Cab with Panoramic Curved</b> glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0
---------	---	--	---



<b>Sales Code</b>	<b>Std/ Opt</b>	<b>Description</b>	<b>Weight</b>
8090604	O	<b>Hood: T880 Standard Length With Mechanically Fastened Fenders.</b> 122.6 inch BBC.	<b>15</b>
8108002	O	<b>Fine Particulate Filter for Cabin Air HVAC</b> system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	<b>0</b>
8108011	S	<b>Cab HVAC - Day Cab and 40 in. Sleeper</b> System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	<b>0</b>
8201047	S	<b>Kenworth Smartwheel: 18 in. Non-Leather With</b> Integrated Radio and Cruise Controls.	<b>0</b>
8201051	O	<b>Column Mtd Retarder Control, RH Side</b> Use with Manual & Allison Transmissions Only.	<b>0</b>
8201200	S	<b>Adjustable Telescoping Tilt Steering Column.</b>	<b>0</b>
8203060	O	<b>5 Sets of Keys. Replaces Standard 2 Sets of Keys.</b>	<b>0</b>
8203191	O	<b>Customer Specified Tumbler P/N. All Chassis</b> keyed alike if applicable. Includes ignition, cab doors & if applicable, sleeper tool box door. 2.1m models. G key will not work on new P lock and ignition.	<b>0</b>
		<i>Narr P0444</i>	
8203196	O	<b>Dash Mounted Compact Trailer Brake Valve.</b> Self Returning.	<b>0</b>
8205087	O	<b>Auto Suspension Dump W/PTO Engagement Interlock.</b> This feature automatically dumps air from the truck suspension when any PTO is engaged. The intent of this feature is to deflate the air suspension air bags while the load is raised to help alleviate any imbalance or instability that can occur with the air bags inflated.	<b>2</b>
8205177	O	<b>Dash Switch:1st Allison-Mounted PTO.</b> Electric switch and wiring are factory-installed to control the 1st Allison Trans mounted PTO.	<b>0</b>
8208495	O	<b>Two Spare Switches: Wired to Power.</b>	<b>0</b>
8221144	O	<b>Gauge: Air Suspension Pressure Gauge.</b>	<b>0</b>
8222404	S	<b>Gauge: DD Virtual Gauge - Oil Temp Engine</b>	<b>0</b>
8222413	S	<b>Gauge: DD Virtual Gauge - Manifold</b> Pressure Boost	<b>0</b>
8222414	S	<b>Gauge: DD Virtual Gauge - Engine Percent</b> Torque	<b>0</b>

Sales Code	Std/Opt	Description	Weight
8222712	O	<b>Gauge: Fuel Filter Restriction Gauge.</b>	0
8222722	O	<b>Gauge: Manifold Pressure Gauge.</b> The NavPlus HD unit includes a virtual manifold pressure gauge.	0
8225658	O	<b>Gauge: Axle Oil Temperature, Dual-Drive Axle.</b> (2 gauges) w/integral warning light.	0
8226667	O	<b>Gauge: Oil Temperature Gauge Transmission.</b> The NavPlus HD unit includes a virtual transmission oil temperature gauge.	0
8282027	S	<b>Main Instrument Package: 15" Digital Display.</b> Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0
8282108	O	<b>Modular Dash Options: RH Dash Storage Unit With</b> two shelves. Reduces total gauge count; HD by 6 and MD by 4.	0
8300008	S	<b>Interior Color: Slate Gray</b>	0
8330102	S	<b>Interior Package: Vantage Daycab</b> Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0
8390634	S	<b>Rubber Floormat</b>	0
8410200	O	<b>Driver Seat: GT701 HB with Vinyl material.</b> The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	0
8480103	O	<b>Rider Seat: GT100 Toolbox IB with Vinyl Material.</b> The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	0
8490181	S	<b>Seat Color: Black</b>	0
8496559	O	<b>Driver and Rider Seat Belts: Orange Seat Belts.</b> Replacing standard color.	0
8601432	O	<b>Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth</b>	0
8698974	S	<b>Base Level Audio System - Daycab:High Performance</b> Door Speakers.	0
8700197	S	<b>Turn Signal: Non-Self Cancelling</b>	0
8700283	S	<b>LH and RH Trip Ledge Rain Deflectors</b>	0
8700663	S	<b>Kenworth TruckTech+:</b>	0

Sales Code	Std/ Opt	Description	Weight
		This system provides the World's Best reporting of engine and aftertreatment fault codes, as well as enhanced support for the truck owner through rapid communication of fault severity and recommended actions. This is standard on all Kenworth models with a PACCAR MX engine, Cummins X15 engine, PX engine or Natural Gas engine.	
8800380	O	<b>Grabhandle: LH &amp; RH SOC Non-Slip Ergonomic</b> Grab Handles Mounted To The Left Hand and Right Hand Exterior Of The Cab For Entry and Exit. NFPA Compliant.	6
8800402	S	<b>Dual Cab Interior Grabhandles: A Pillar Mounted</b> Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	<b>Kenworth Daylite Door With Standard LH/RH</b> electric door locks and LH/RH electric window controls.	0
8841618	O	<b>Dual Rectangular Air Horn 23 in. LH &amp; RH Top of</b> roof. Includes air horn covers.	4
8850139	S	<b>Look-Down, Pass. Door, Black 11x6</b>	0
8865002	S	<b>Aero Mirror: Dual Kenworth Aerodynamic Motorized</b> heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0
8871447	O	<b>Rear Cab Stationary Window with Dark Tint</b> 19in x 36in.	0
8890101	S	<b>One-Piece Bonded-In Windshield With Curved Glass.</b> Standard.	0
8890135	S	<b>Exterior Stainless Steel Sunvisor.</b>	19
8890349	S	<b>Wheelwell Fender Extension: 2.5 Inches</b>	0
8890876	S	<b>Kenworth Cab/Sleeper Air Suspension.</b>	0
8891013	O	<b>Extreme Temperature Insulation: Daycab</b> Additional cab side wall insulation with improved material properties over standard insulation package.	0
<b>Lights &amp; Instruments</b>			
9010553	S	<b>Headlamps: SAE Dual Halogen Complex Reflector</b>	0
9022137	S	<b>Marker Lights: Five, Rectangular, LED</b>	0
9030016	S	<b>Turn Signal Lights: Flush Mounted LED. Mounted at</b> top of fender wheel arc.	0
9030052	S	<b>LED Stop, Turn, Tail: With Two LED</b> Backup Lights and With An LED License Plate.	0
9056140	O	<b>Dual Pedestal Floodlights: First Set</b>	2
9059901	O	<b>Floodlight Location: Located High - First Set.</b> This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0

Sales Code	Std/ Opt	Description	Weight
9090039	S	<b>Marker Lights: Interrupter Switch.</b> Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0
9090052	O	<b>Brake Lights on when Engine Brake Active.</b> Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090126	O	<b>Electric Backup Alarm: Meets SAE J994 &amp; OSHA</b> requirements.	4
9090316	O	<b>Junction Box: End of Frame</b>	1
9090849	O	<b>Polyswitches Replacing Fuses. Switch Will</b> automatically reset after removal of excess load.	0
<b>Air Equipment</b>			
9101219	O	<b>Air Dryer: Bendix AD-HF Extended Purge Heated</b> With Puraguard	0
9108001	S	<b>Moisture Ejection Valve W/ Pull Cable Drain.</b>	0
9110071	O	<b>Tractor Kit: Center Frame-Mounted W/ Hosetenna.</b> Includes composite gladhand/light plug holder. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve and tractor protection valve are standard. Air lines are detachable at one end only, light lines are detachable at both ends. Conspicuity components are standard.	24
9120012	O	<b>Air and light line length 12 feet</b>	0
9121047	O	<b>Phillips 12 ft Straight Light Line W/ Metal Plugs</b> & 12 in. lead. Must code for tractor kit.	0
9140020	S	<b>Nylon Air Tubing in Frame &amp; Cab, Excluding Hoses</b> subject to excessive heat or flexing.	0
9140254	O	<b>Locate Air Dryer Inside RH Rail BOC.</b> This code requires the use of a custom frame layout code.	0
9140328	O	<b>Trailer ABS Electric Supply Through SAE J560</b> 7-pin connector per TMC RP137).	0
9140703	O	<b>Optional Hosetenna Bracket Location 3ft</b> BOC/sleeper. Hosetenna bracket will be located plus or minus six inches from any non-standard location requested	0
<b>Extended Warranty</b>			
9200021	S	<b>Base Warranty - Standard Service Heavy Duty</b> 12 months / 100,000 miles / 160,000 km.	0
9201828	O	<b>EW: US Basic Vehicle 5 year/100,000 miles,</b> United States only.	0
9203776	O	<b>Cummins EW: Protect Plan 1 X15 EPA24</b> 5YR/100K (160,935KM), Efficiency/Productivity Series. Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	0
9203810	O	<b>Cummins EW: Aftertreatment X15 Use W/ PP1 EPA24</b>	0

Price Level: January 1, 2024

Deal: T880 Haul Tractor

Printed On: 9/28/2023 6:38:27 AM

Date: September 28, 2023

Quote Number: QUO-979824-F2N6K6

Sales Code	Std/ Opt	Description	Weight
		5YR/100K (160,935KM), Efficiency/Productivity Series. Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	
9212651	O	<b>TruckTech+ RD - 3YR Sub Cummins Engines</b>	0
9220001	O	<b>Base Warranty: Emissions</b> 5YR/100K MI - EPA Engine	0
<b>Miscellaneous</b>			
9409852	O	<b>GHG Secondary Manufacturer: Does Not Apply</b>	0
9490206	O	<b>Warning Triangle Reflector Kit: Shipped Loose.</b> Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	4
9490406	O	<b>One 5 lb. Dry Chemical Type Fire Extinguisher</b> mounted outboard of rider seat. Class ABC.	11
9491659	S	<b>VMUX Architecture</b>	0
<b>Promotions</b>			
<b>Paint</b>			
9700000	O	<b>Paint Color Number(s).</b>  N9702 A - L0436 SIERRA BLUE N9720 FRAME N0001 BLACK	0
9943004	O	<b>Bumper Unpainted</b>	0
9943050	O	<b>Day Cab Standard Paint</b>	0
9944820	S	<b>1 - Color Paint - Day Cab</b> Color will be White if no other color is specified.	0
9960003	O	<b>Non-Standard Paint Color.</b>	0
9965510	S	<b>Base Coat/ Clear Coat.</b> The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0

<i>Sales Code</i>	<i>Std/ Opt</i>	<i>Description</i>	<i>Weight</i>
-----------------------	---------------------	--------------------	---------------

**Special Requirements**

Special Requirement 1 0098025  
Special Requirement 2  
Special Requirement 3  
Special Requirement 4

**Order Comments**

Total Weight

16,196

## Prices and Specifications Subject to Change Without Notice.

---

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.


---

### **PRICING DISCLAIMER**

*While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information*




## HORIZONTAL DIMENSIONS

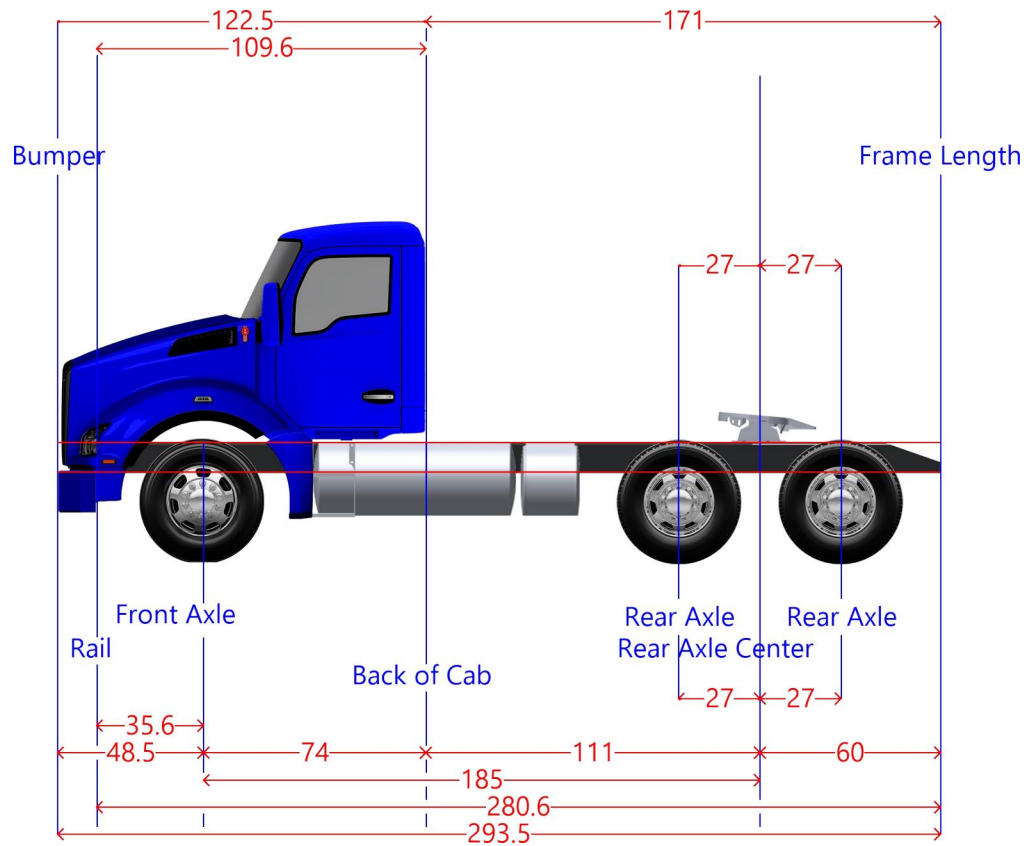

Dimension	Measurement	Start	End
Axle Spacing	54	158	212
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	171.0	74	245
Cab to Rear Axle	111.0	74	185
Effective Bumper to Back Of Cab	122.5	-48.5	74
Frame Length	280.6	-35.6	245
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	171.0	74	245
Overall Length	293.5	-48.5	245
Overhang	60.0	185	245
Pusher Offset #1	27.0	158	185
Pusher Offset #2	27.0	158	185
Pusher Offset #3	27.0	158	185
Tag Offset	27.0	185	212
Wheelbase	185	0	185

FRAME LAYOUT

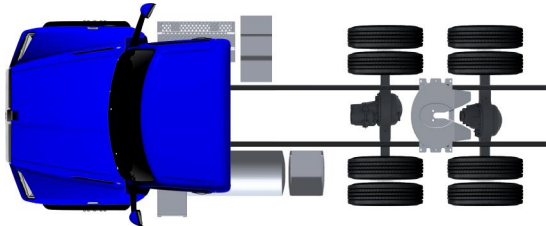

**Note:** Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

**Selected Options** (Wheelbase: 185)

Sales Code	Description	Length	Side
7210135	Fuel Tank: 135 US Gallon 24.5 in. Aluminum Under	67.5	Left
7722154	Medium Round DEF Tank, 23.8 Gallons.	16.1	Left
7839400	Extended Steps on Fuel Tank LH Under for Access;	38.5	Left
6400636	Battery Box Cantilever Aluminum BOC with	17.3	Right