

PO# 166568
Dms

FORT BEND COUNTY ENGINEERING

CHANGE ORDER

- Distribution:
- FBC Engineering
 - FBC Judge
 - FBC Purchasing
 - Contractor
 - Consultant

Address: 301 Jackson Street
Richmond, Texas 77469

Phone: 281-633-7500

Fax: 281-342-7366

Web site: www.FortBendCountyTx.gov

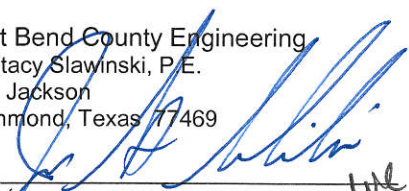

PROJECT: Construction of A Myers Road	CHANGE ORDER NUMBER	03
	DATE	08/01/2019
	PROJECT NUMBER	13102
CONTRACTOR: Hurtado Construction Company 5629 FM 359 S Brookshire, Texas 77423	CONTRACT FOR	2,567,094.30 ✓
	CONTRACT DATE	7/11/2018
	FBC PURCHASE ORDER NO	166568

The contract is changed as follows:
 This change order is to address additional scope and quantities generated by RFP's # 3, 4, 6, 7, 8 & 9 (see attached).
 There will also an additional 167 calendar days needed for the additional scope added for this RFP's, most of which
 comes from the delay in the re-design of the slope protection section because of the issues with constructing in the
 channel.

Not valid until signed by Fort Bend County and Contractor.

The Original (Contract Sum)	\$	2,567,094.30 ✓
Net change by previously authorized Change Orders	\$	317,219.22 ✓
The (Contract Sum) Prior to this Change Order was	\$	2,884,313.52 ✓
The (Contract Sum) will be <input checked="" type="checkbox"/> increased <i>or</i> <input type="checkbox"/> decreased <i>or</i> <input type="checkbox"/> unchanged by this Change Order in the amount of		
	\$	295,568.58
The new (Contract Sum) including this Change Order will be		
	\$	3,179,882.10 ✓

The Contract Time will be increased *or* decreased *or* unchanged by **167** days.
 The Date of Substantial Completion as of this Change Order therefore is
 changed *or* unchanged to **9/14/2019**.

Authorized:		
Fort Bend County Engineering J. Stacy Slawinski, P.E. 301 Jackson Richmond, Texas 77469	CONTRACTOR	Fort Bend County Judge Honorable KP George 301 Jackson St., #719 Richmond, Texas 77469
By:  (signature)	By:  (signature)	By: _____ (signature)
DATE: 8/5/19	DATE: 8/2/2019	DATE: _____

**A Myers Road from Exist A Myers Road to FM 762
FBC Mobility Project No.13102**

CHANGE ORDER NO.03 – WORK SHEET

Item #	Description	Unit of Measure	Quantity	Unit Price (\$)	Total Price (\$)
0400-6001A	Conc Box Culv (3 FT X 2 FT) (RFP 7)	LF	10	203.88	2,038.80
0462-6009B	RC Pipe (CL III)(24 IN) (RFP 7)	LF	16	82.88	1,326.08
0502-2001A	Traffic Control for Work at Intersection (RFP 7)	LS	1	388.00	388.00
RFP1-01A	Slope Paving at Station 41+00 (RFP 7)	SY	333	62.56	20,832.48
RFP1-01B	Concrete Slope Paving (4 In)(RFI#1) (RFP 9)	SY	(1,291)	62.56	(80,764.96)
RFP1-05A	Demucking of Unsuitable Soil at Dry Creek Including any foundation work to stabilize area for slope paving (RFI #1)(RFP9)	LS	(1)	7,500.00	(7,500.00)
RFP3-01	Slope Paving Interceptors at Drainage Channel	EA	2	4,688.00	9,376.00
RFP4-01	Expansion of A Myers Road During Detour for the County	EA	1	7,045.50	7,045.50
RFP6-01	Remove & Dispose of Power poles & Backfill with Concrete	EA	4	1,228.00	4,912.00
RFP7-01	Remove SET's & Reset SET's after extending Pipe	EA	4	1,198	4,792.00
RFP7-02	Slope Paving at Northwest Corner of A Myers & Berdett Road	EA	1	4,480.60	4,480.60
RFP8-03	Furnish & Install Sign Assembly – Stop Ahead 36"	EA	2	341.25	682.50
RFP8-04	24" Stop Bar – Type I Thermoplastic Pavement Marking	LF	56	6.30	352.80
RFP8-06	Furnish & Install Sign Assembly – 36" Stop Sign w/ Flags	EA	2	372.75	745.50
RFP8-07	Furnish & Install Sign Assembly – Stop Ahead	EA	2	309.75	619.50
RFP8-08	24" Stop Bar – Type I Thermoplastic Pavement Marking	LF	32	6.30	201.60
RFP8-09	Furnish & Install Sign Assembly – Back to Back Chevron	EA	17	309.75	5,265.75
RFP8-10	Furnish & Install Sign Assembly - Curve	EA	2	278.25	556.50
RFP8-11	Furnish & Install Sign Assembly - Intersection	EA	2	278.25	556.50
RFP8-12	Furnish & Install Sign Assembly – Speed Limit	EA	3	278.25	834.75
RFP8-13	Regrading of Berdett Roadside Ditch from Intersection to Driveway Culvert for Positive Drainage	LF	630	8.88	5,594.40



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 3

Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QUANTITY</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
1	SLOPE PAVING INTERCEPTORS AT DRAINAGE CHANNEL (PER DETAIL 10'X4' TOE WALL AROUND SLOPE PAVING INCLUDED)	EA	2.00	\$ 4,688.00	\$ 9,376.00
	SUBTOTAL				\$ 9,376.00

HURTADO CONSTRUCTION WILL REQUIRE AN ADDITIONAL 5 DAYS FOR THIS WORK.



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 4

Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QUANTITY</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
RFP4-01	Expansion of A Myers Road During Detour for the County (Temporary Pipe, Crushed Concrete)(Had to Pump Standing Water in Ditch)	EA	1.00	\$ 7,045.50	\$ 7,045.50
	LABOR	EA	1.00	\$	1,400.00
	EQUIPMENT	EA	1.00	\$	900.00
	FUEL	EA	1.00	\$	900.00
	CRUSHED CONCRETE	TONS	45.00	\$	1,200.00
	30 INCH RCP (DAMAGED WHEN REMOVING)	LF	24.00	\$	900.00
	IMPORT DIRT / BACKFILL	LOADS	9.00	\$	405.00
	ALLOCATE	LS	1.00	\$	700.00
	PROFIT 10%	LS	1.00	\$	640.50
	SUBTOTAL			\$	7,045.50

HURTADO CONSTRUCTION WILL REQUIRE AN ADDITIONAL 2 DAYS FOR THIS WORK.



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 6

Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QUANTITY</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
RFP6-01	Remove and Dispose of Power Poles and Backfill with Concrete	EA	4.00	\$ 1,228.00	\$ 4,912.00
	<i>Labor</i>	EA	1.00	\$	1,824.00
	<i>Equipment</i>	EA	1.00	\$	500.00
	<i>Fuel</i>	EA	1.00	\$	500.00
	<i>Concrete</i>	CY	7.00	\$	790.00
	<i>Disposal</i>	EA	1.00	\$	600.00
	<i>Allocated Cost/Overhead</i>	EA	1.00	\$	250.00
	<i>Profit 10%</i>	LS	1.00	\$	448.00
	SUBTOTAL			\$	4,912.00

HURTADO CONSTRUCTION WILL REQUIRE AN ADDITIONAL 2 DAYS FOR THIS WORK.



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 7
Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QUANTITY</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
0400-6001A	Conc Box Culv (3 FT X 2 FT)	LF	10.00	\$ 203.88	\$ 2,038.80
0462-6009B	RC Pipe (CL III)(24 IN)	LF	16.00	\$ 82.88	\$ 1,326.08
RFP7-01	Remove SET's and Reset SET's after extending Pipe (Sawcut 24" RCP/Collar) - <i>This item is for the work at FM 762 near the High School</i>	EA	4.00	\$ 1,198.00	\$ 4,792.00
RFP7-02	Slope Paving at the Northwest Corner of A Myers and Berdett Road (Includes Sawcutting Existing SET and Removing Piece of SET) to prevent erosion onto the ditch	EA	1.00	\$ 4,480.60	\$ 4,480.60
	<i>Labor</i>	EA	1.00	\$ 600.00	\$ 600.00
	<i>Subcontractor</i>	LS	1.00	\$ 3,255.00	\$ 3,255.00
	<i>Concrete Slope Paving</i>	SY	10.00	\$ 62.56	\$ 625.60
0502-2001A	Traffic Control for Work at Intersection	LS	1.00	\$ 388.00	\$ 388.00
RFP1-01A	Slope Paving at Station 41+00	SY	333.00	\$ 62.56	\$ 20,832.48
	SUBTOTAL			\$	\$ 33,857.96

HURTADO CONSTRUCTION WILL REQUIRE AN ADDITIONAL 7 DAYS FOR THIS WORK.



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 8
Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>QUANTITY</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
RFP8-03	Furnish and Install Sign Assembly - Stop Ahead 36"	EA	2.00	\$ 341.25	\$ 682.50
RFP8-04	24" Stop Bar - Type I Thermoplastic Pavement marking, Per LF	LF	56.00	\$ 6.30	\$ 352.80
RFP8-06	Furnish and Install Sign Assembly - 36" Stop Sign with Flags	EA	2.00	\$ 372.75	\$ 745.50
RFP8-07	Furnish and Install Sign Assembly - Stop Ahead	EA	2.00	\$ 309.75	\$ 619.50
RFP8-08	24" Stop Bar - Type I Thermoplastic Pavement marking, Per LF	LF	32.00	\$ 6.30	\$ 201.60
RFP8-09	Furnish and Install Sign Assembly - Back to Back Chevron	EA	17.00	\$ 309.75	\$ 5,265.75
RFP8-10	Furnish and Install Sign Assembly - Curve	EA	2.00	\$ 278.25	\$ 556.50
RFP8-11	Furnish and Install Sign Assembly - Intersection	EA	2.00	\$ 278.25	\$ 556.50
RFP8-12	Furnish and Install Sign Assembly - Speed Limit	EA	3.00	\$ 278.25	\$ 834.75
RFP8-13	Regrading of Berdett Roadside Ditch from Intersection to Driveway Culvert for Positive Drainage - Hauling Dirt and Spreading	LF	630.00	\$ 8.88	\$ 5,594.40
	SUBTOTAL				\$ 15,409.80

HURTADO CONSTRUCTION WILL REQUIRE AN ADDITIONAL 3 DAYS FOR THIS WORK.

P B & J Pavement Marking Inc.

14019 SW Freeway #301-302

Sugar Land, Texas 77478

Invoice

Date	Invoice #
5/29/2019	11562

Bill To
Hurtado Construction Company, Inc. 5629 FM 359 S. Brookshire, Texas 77423

P.O. No.	Terms	Job Location	
	Net 30	A. Meyers Road	
Description	Qty	Unit Price	Amount
Furnish & Install Sign Assembly - 36" Stop Sign with Flags	2	355.00	710.00
Furnish & Install Sign Assembly - Stop Ahead	2	295.00	590.00
24" Stop Bar - Type I Thermoplastic pavement marking, per LF.	32	6.00	192.00
TX Sales tax		8.25%	0.00
We appreciate your business! Thank you!		Total	\$1,492.00

P B & J Pavement Marking Inc.

14019 SW Freeway #301-302

Sugar Land, Texas 77478

Invoice

Date	Invoice #
4/24/2019	11504

Bill To
Hurtado Construction Company, Inc. 5629 FM 359 S. Brookshire, Texas 77423

Description	P.O. No.	Terms	Job Location	
		Net 30	A Meyers Road	
	Qty	Unit Price	Amount	
Furnish & Install Sign Assembly - Back to Back Chevron	17	295.00	5,015.00	
Furnish & Install Sign Assembly - Curve	2	265.00	530.00	
Furnish & Install Sign Assembly - Intersection	2	265.00	530.00	
Furnish & Install Sign Assembly - Speed Limit	3	265.00	795.00	
TX Sales tax		8.25%	0.00	
We appreciate your business! Thank you!		Total	\$6,870.00	

P B & J Pavement Marking Inc.

14019 SW Freeway #301-302
 Sugar Land, Texas 77478

Invoice

Date	Invoice #
3/25/2019	11461

Bill To
Hurtado Construction Company, Inc. 5629 FM 359 S. Brookshire, Texas 77423

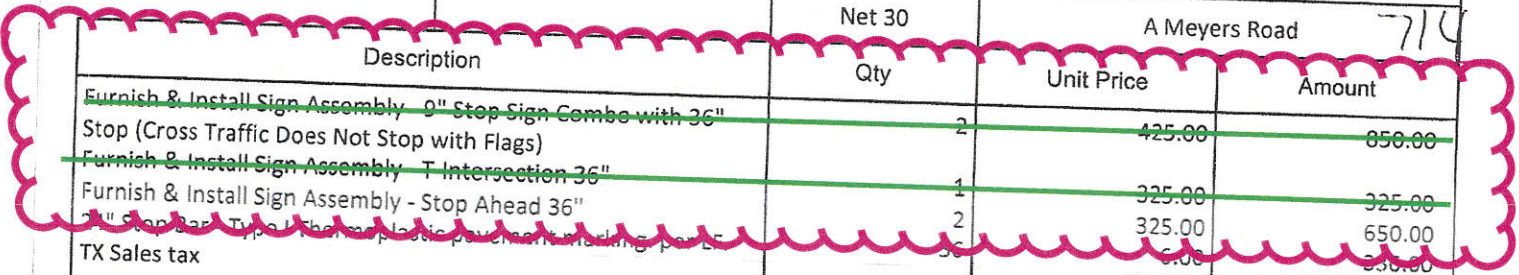
APR 2 2019

MISSING!

11504 - \$4,870"

11562 - \$1,492"

P.O. No.	Terms	Job Location
	Net 30	A Meyers Road 710



Description	Qty	Unit Price	Amount
Furnish & Install Sign Assembly - 0" Stop Sign Combo with 36" Stop (Cross Traffic Does Not Stop with Flags)	2	425.00	850.00
Furnish & Install Sign Assembly - T Intersection 36"	1	325.00	325.00
Furnish & Install Sign Assembly - Stop Ahead 36"	2	325.00	650.00
3" Stop Bar Type I Thermoplastic pavement marking per LF	50	6.00	300.00
TX Sales tax		8.25%	0.00
We appreciate your business! Thank you!		Total	\$2,161.00

[Handwritten signatures]

9552
 4-18-19
 LR



Hurtado Construction Company
5629 FM 359 S
Brookshire, Texas 77423

RFP No: 9
Project: A Myers Road from Bedette Road to FM 762

<u>ITEM NO</u>	<u>DESCRIPTION</u>	<u>UNIT</u>	<u>Estimated Quantity</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
RFP9-01	Grade 2 - Rip Rap (Limestone - only thing Cherry has readily available) - Stable Sublayer Preparation - 7 foot depth	TONS	1,631.00	\$ 77.88	\$ 127,022.28
RFP9-02	Crushed Concrete Above Rip Rap for Finer Grade	TONS	400.00	\$ 38.88	\$ 15,552.00
RFP9-03	Remove Unsuitable Soil (displacement after rip rap is dropped in)	CY	3,000.00	\$ 22.08	\$ 66,240.00
RFP9-04	Remobilization	LS	1.00	\$ 8,000.00	\$ 8,000.00
RFP9-05	Re-Staking	LS	1.00	\$ 2,070.00	\$ 2,070.00
RFP9-06	4 Inch Uniform Section Mat (completed by Er-Con Technologies)	SF	6,100.00	\$ 5.62	\$ 34,282.00
RFP9-07	6 Inch Uniform Section Mat (completed by Er-Con Technologies)	SF	7,500.00	\$ 6.94	\$ 52,050.00
RFP9-08	Bond Rider	EA	1.00	\$ 8,016.00	\$ 8,016.00
	SUBTOTAL				\$ 313,232.28

Note:

RFP9-01, RFP9-02 & RFP9-03 will all have the actual quantity determined by the actual tickets

*Hurtado Construction will need assistance coordinating with NRG/BRA
about minimizing pumping the water in the creek to help with construction.*

HURTADO CONSTRUCTION AGREES TO THE ELIMINATION OF RFP1-01 AND RFP1-05 BUT NO TO THE ELIMINATION OF RFP1-04 AS IT WAS ALREADY INSTALLED AND BURIED.

**HURTADO CONSTRUCTION WILL NEED A TIME EXTENSION OF 148 DAYS
HURTADO CONSTRUCTION WILL GET STARTED ON AUGUST 19, 2019 AND WITHIN 3 WEEKS PENDING
APPROVAL FROM THE COUNTY**