



Permit to Construct Access Driveway Facilities on Highway Right of Way

Form 1058
(Rev. 09/23)
Page 1 of 2

PERMIT NUMBER: 24040066			
REQUESTOR		GPS*	
		LATITUDE, LONGITUDE	
		29.68465 -95.84576	
		ROADWAY	
		HWY NAME	FM0359
		FOR TxDOT'S USE	
NAME		CONTROL	0543
Fort Bend County c/o Halff Associates		SECTION	02
MAILING ADDRESS	11000 FM 359 - Intersection of FM359 and Fulshear-Gaston Road		
CITY, STATE, ZIP	Richmond, TX 77406		
PHONE NUMBER	(214) 217-6441		
*GLOBAL POSITIONING SYSTEM COORDINATES AT INTERSECTION OF DRIVEWAY CENTERLINE WITH ABUTTING ROADWAY			

The Texas Department of Transportation, hereinafter called the State, hereby authorizes Fort Bend County, hereinafter called the Permittee, to ☒ construct / ☐ reconstruct a Traffic Signal (residential, convenience store, retail mall, farm, etc.) access driveway on the highway right of way abutting highway number FM0359 in Fort Bend County, located Fulshear-Gaston Road / McKinnon Road.

USE ADDITIONAL SHEETS AS NEEDED

Is this parcel in current litigation with the State of Texas? ☐ YES ☒ NO

Is the Permittee or a family member of Permittee an employee or official of the Texas Department of Transportation? ☐ YES ☒ NO


Does an employee or official of the Texas Department of Transportation serve as an employee or officer of Permittee or own a controlling interest in Permittee? ☐ YES ☒ NO

This permit is subject to the Access Driveway Policy described on page 2 and the following:

1. The undersigned hereby agrees to comply with the terms and conditions set forth in this permit for construction and maintenance of an access driveway on the state highway right of way.
2. The Permittee represents that the design of the facilities, as shown in the attached sketch, is in accordance with the Roadway Design Manual, Hydraulic Design Manual and the access management standards set forth in the Access Management Manual (except as otherwise permitted by an approved variance).
3. Construction of the driveway shall be in accordance with the attached design sketch, and is subject to inspection and approval by the State.
4. Maintenance of facilities constructed hereunder shall be the responsibility of the Permittee, and the State reserves the right to require any changes, maintenance or repairs as may be necessary to provide protection of life or property on or adjacent to the highway. Changes in design will be made only with prior written approval of the State.
5. The Permittee shall hold harmless the State and its duly appointed agents and employees against any action for personal injury or property damage related to the driveway permitted hereunder.
6. Except for regulatory and guide signs at county roads and city streets, the Permittee shall not erect any sign on or extending over any portion of the highway right of way. The Permittee shall ensure that any vehicle service fixtures such as fuel pumps, vendor stands, or tanks shall be located at least 12 feet from the right of way line to ensure that any vehicle services from these fixtures will be off the highway right of way.
7. The State reserves the right to require a new access driveway permit in the event of: (i) a material change in land use, driveway traffic volume or vehicle types using the driveway, or (ii) reconstruction or other modification of the highway facility by the State.
8. The State may revoke this permit upon violation of any provision of this permit by the Permittee.
9. This permit will become null and void if the above-referenced driveway facilities are not constructed within six (6) months from the issuance date of this permit.
10. The Permittee will contact the State's representative Juan M Mata telephone, (281) 238-7957 , at least twenty-four (24) hours prior to beginning the work authorized by this permit.
11. The requesting Permittee will be provided instructions on the appeal process if this permit request is denied by the State.

The undersigned hereby agrees to comply with the terms and conditions set forth in this permit for construction and maintenance of an access driveway on the highway right of way.

Date: February 11, 2025

Signed: 
(Property owner or owner's representative)

Date of Issuance	District Engineer, or designee Approval
Date of Issuance as per Variance to AMM	District Engineer, or designee Approval
Date of Denial	District Engineer Denial (No Delegation)

Access Driveway Policy

Title 43 Texas Administrative Code (Transportation), Chapter 11 (Design), Subchapter C (Access Connections To State Highways) and the "Access Management Manual" establish policy for the granting of access and the design, materials, and construction of driveways connecting to state highways. All driveway facilities must follow this policy. To the extent there is any conflict between this permit and the policy, the policy shall control. If a proposed driveway does not comply with the access management standards, the owner may seek a variance to a requirement contained in the access management standards by contacting the local TxDOT office.

TxDOT Driveway Permit Request Contact

For a local contact for your TxDOT Driveway Permit Request or variance request, visit: <http://www.txdot.gov/inside-txdot/district.html>. You can click on the section of the map closest to your location to find the local TxDOT office. You can also click on the drop down box below the map to find the district for your county.

Other Conditions

In addition to Items 1 thru 11 on page 1 of this permit, the facility shall also be in accordance with the attached sketch and subject to the following additional conditions stated below:

Provide for a traffic signal at the intersection of TxDOT FM359 and Fulshear-Gaston Road/McKinnon Road per plans dated 10-11-2024 and executed donation agreement. Access Only (No drainage to TxDOT).
Also, attached Special Provisions dated July 1, 2022 must be followed.

Variance Documentation Justification

For a Variance request, please indicate which of the below are applicable, as required by TAC §11.52(e):

- ☐ a significant negative impact to the owner's real property or its use will likely result from the denial of its request for the variance, including the loss of reasonable access to the property or undue hardship on a business located on the property.
- ☐ an unusual condition affecting the property exists that was not caused by the property owner and justifies the request for the variance.

For the conditions selected above, provide written justification below. (Attach additional sheets, if needed)

For TXDOT use below:

For Variance denials, please indicate which of the below conditions, as provided in TAC §11.52(e), were determined:

- ☐ adversely affect the safety, design, construction, mobility, efficient operation, or maintenance of the highway; or
- ☐ likely impair the ability of the state or the department to receive funds for highway construction or maintenance from the federal government.

Attachments:

Sketch of Installation

All Variance Documentation

Permit Special Provisions

Revised July 1, 2022

1. The Permittee is responsible for all costs associated with the construction of this access driveway.
2. All Pipes used shall be Reinforced Concrete Pipe (RCP), unless otherwise specified.
3. Culvert crossings within the 30-foot clear zone (parallel culverts) shall be required to have minimum 6:1 sloping ends known as Safety End Treatments (SETs). The culvert shall have sufficient length to allow the 6:1 slope to be achieved from the edge of pavement to the flowline at the end of the SET. Culverts that exceed 50'f in length shall have a junction box for clean out, or as specified by the TxDOT Area Engineer.
4. Culverts larger than single 33-inch diameter, double 30-inch diameter, or three or more 12-inch diameter shall require safety pipe runners.
5. Riprap or stabilizing material shall be provided and installed by grantee at time of construction, or as directed by the TxDOT Area Engineer.
6. For TxDOT-maintained ASPHALT SURFACED PAVEMENT, no concrete pavement or curbing shall be allowed within State right of way.
7. For TxDOT-maintained CONCRETE SURFACED PAVEMENT, additional full-depth saw cuts may be made as needed to facilitate removal of the concrete within the limits of the required full-depth cuts. Concrete adjacent to the patch shall not be spalled or fractured by the removal procedure.
8. Placement or removal of beautification on State right of way shall be under the direction of TxDOT.
9. The Permittee certifies that its storm water runoff to the State's right of way shall not be contaminated by any industrial processes or significant pollutants, and the State shall not be held liable for any pollutants entering State right of way through storm water connections.
10. The Permittee be in compliance with the Americans with Disabilities Act Accessibility Guidelines (ADAAG) and the Texas Accessibility Standards (TAS), and Texas Department of Licensing and Regulation (TDLR) requirements for items including but not limited to sidewalks, landings, and wheelchair ramps.
11. Permittee shall obtain overall environmental clearance with all appropriate regulatory agencies prior to beginning construction. Approval of this request by TxDOT does not relieve the Permittee or its agents of this obligation.
12. Work performed on railroad right-of-way, or easements controlled by others, is subject to the concurrence of the owner of said properties. Approval of this request by TxDOT does not relieve the Permittee of this obligation.
13. The complete permit package shall be on the project site at all times and available for review by TxDOT.
14. TxDOT will inspect the construction and may provide the flow-line elevation.

Permit Special Provisions

Revised July 1, 2022

15. All work within the State of Texas right-of-way shall be performed in accordance with State standards and specifications as to the installation and materials used. All materials and mix designs to be placed in TxDOT right-of-way must be obtained from TxDOT approved sources and be of approved TxDOT mix designs.
16. At least five (5) working days prior to any excavation, permittee shall request the location of all underground utilities within the work area by calling 811, and contacting local municipalities, utility districts, school districts, or any other utility owners. TxDOT-owned fiber optic, communications, power, illumination, and traffic signal cabling and conduit can be located by emailing the TxDOT Houston District Traffic Operations Office at HOU-LocateRequest@txdot.gov. Do not perform underground work on the project until TxDOT – owned facilities have been located and marked. Use caution when working in these areas to avoid damaging or interfering with existing facilities. Permittee shall be responsible for relocating and/or adjusting any utilities within the work area.
17. This permit is subject to a separate traffic control plan being approved by the Area Engineer. All work must follow the [TxDOT Traffic Control Plan Standards](#), Latest Revision, or if approved, Typical Applications shown in the Texas Manual on Uniform Traffic Control Devices, Latest Revision, Chapter 6-H. The advanced warning signage shown on standards BC(1)-21 thru BC(12)-21 will be required. It is mutually agreed and understood that the implementation and maintenance of the traffic control plan shall be the responsibility of the Permittee. Contractor is required to supply all sub-contractors with a copy of this permit and approved traffic control plan.
18. The Permittee shall coordinate the sequence of construction and traffic control plan with any adjacent highway construction or maintenance projects. No overnight lane closures will be permitted, unless otherwise approved by the Area Engineer.
19. Work performed within the waterways, such as rivers, creeks, bayous, and drainage ditches, is subject to the concurrence of appropriate regulatory agencies. Permittee shall use Best Management Practices to minimize erosion and sedimentation resulting from proposed activities. Permittee certifies that its drainage system meets all storm water quality criteria of the County and/or City where the permit is located. Construction and/or maintenance of this project shall not adversely affect the drainage patterns within the area.
20. All excavations within the right-of-way shall be backfilled according to the [TxDOT Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges](#) (SPECS), Item 400, as currently amended. All surplus material shall be removed from the right-of-way, and the excavation finished flush with surrounding natural ground.
21. In no event will an edge drop-off be permitted during the hours of darkness. If the Contractor is unable to complete a section before the end of the workday, base material capable of vehicle support shall be pulled back to the existing edge on a 4:1 or flatter slope, to provide for driver and pedestrian safety.
22. The Contractor shall not create a dirt nuisance or safety hazard in any roadway. The pavement shall be cleaned daily.

Permit Special Provisions

Revised July 1, 2022

23. All exposed dirt surfaces shall be sodded, unless otherwise approved by the Area Engineer. A slope of 4:1, or flatter, shall be required on the ditch front slope.
24. No trees, vegetation, valves, meter boxes, cleanouts, ground boxes, handholes, manhole covers, etc. will be allowed in the pavement. These appurtenances shall be relocated elsewhere within the right-of-way, unless otherwise approved by the Area Engineer.
25. The Texas Universal Triangular Slip Base Sign Supports shall be required for all signage within TxDOT right-of-way. Proposed signs, or those which require relocation, shall be done in accordance with the following [TxDOT Sign Mounting Details Standards](#): SMD (GEN)-08, SMD (SLIP-1)-08, SMD (SLIP-2)-08, and SMD (SLIP-3)-08.
26. All work zone pavement markings shall meet the requirements of SPECS, Item 662. All permanent pavement markings shall meet the requirements of SPECS, Item 666, and be placed in accordance with the following [TxDOT Pavement Standards](#): PM(1)-20, PM(2)-20, PM(3)-20, and PM(4)-22. All raised pavement markers shall meet the requirements of SPECS, Item 672.
27. Existing pavement markings shall be removed according to the requirements of SPECS, Item 677, or to the satisfaction of the Area Engineer. All pavement surfaces shall be cleaned and prepared in accordance with SPECS, Item 678.
28. For roadway improvements and Street Tie-Ins, the Contractor shall employ at his/her expense, an approved commercial testing laboratory to perform testing on concrete to determine the in-situ strength. Make at least one set of test specimens for each element cast each day. Cure these specimens under the same conditions as the portion of the structure involved for all stages of construction. Ensure safe handling, curing, and storage of all test specimens. Sample and test the hardened concrete in accordance with SPECS, Item 421. Certified reports of all test results shall be submitted to the Area Engineer.
29. Should the existing roadway pavement or other feature be damaged, it shall be repaired as specified by the Area Engineer.
30. Construction Access Permits are to expire after 12 months, unless renewed.
31. The Permittee acknowledges and fully accepts responsibility and liability for the design, construction, maintenance, and operation of this project, which shall be the responsibility of the Grantee for the life of the project. The Permittee shall indemnify and save harmless the State from any and all damages or losses that may develop due to this project.
32. All TxDOT Standard Sheets are available online for free download:
Statewide <http://www.dot.state.tx.us/business/standardplanfiles.htm>
Houston District <http://www.dot.state.tx.us/hou/specinfo/specs.htm>

Permit Special Provisions

Revised July 1, 2022

33. The contractor or sub-contractor is required to contact the TxDOT [Local Maintenance Office](#) Supervisor a minimum of 72 hours prior to commencing any work.

- Brazoria Maintenance Office – Permit Section 2: 979-864-8550
- Galveston Maintenance Office – Permit Section 3: 409-978-2551
- Fort Bend Maintenance Office – Permit Section 4: 281-238-7950
- Montgomery Maintenance Office – Permit Section 5: 936-538-3350
- Southeast Harris Maintenance Office – Permit Section 6: 281-464-5540
- Waller Maintenance Office – Permit Section 7: 979-921-2400
- West Harris Maintenance Office – Permit Section 8: 713-934-5900
- Metro Houston Maintenance Office – Permit Section 9: 713-636-7400
- North Harris Maintenance Office – Permit Section 10: 281-319-6450

In Process



- [Close Window](#)
- [Print This Page](#)
- [Expand All](#) | [Collapse All](#)

TR24040066

Contact Information

Application Name	TR24040066	Application Status	Complete - No Objections
Date of Submittal	4/30/2024	Upload to Box	☐
Date of Latest Resubmittal		Review Phase	Complete - Phase 3
First Name (Authorized Agent)	Stephen	Record Type	Application record Type
Last Name (Authorized Agent)	Moore	Mailing Street	1201 N. Bowser Road
Name of Owner as shown on Property Deed	Fort Bend County	Mailing City	Richardson
Last Name (Property Owner)		Mailing State/Province	TX
Consulting Firm	Half Associates	Mailing Zip/Postal Code	75081
User edited Address	☐	Login Account Email	smoore@half.com
Need Agreement	☒	Owner Email	smoore@half.com
Need ROW Land Donation Agreement	☐	Developer or Additional Email	
Upload to OnBase Complete	☐	Business Phone	2142176441
Area Engineer	Carlos M Zepeda Jr., P.E.	Cell Phone	
Assistant Area Engineer	Daniel J Dvorak	Contact Person	
Permit Coordinator	Cindy S Kurtz	Owner	Stephen Moore
Maintenance Section Supervisor	Juan M Mata		
Maintenance Section Supervisor Number	(281) 238-7963		
Permit Coordinator Phone Number	(281) 238-7956		
Due Date Status	☐		

Comments

Maintenance Office Comments

Application Withdrawn Comments

Applicant Response

Maintenance Office Comments History

; 2024-09-04 Updated signal plan set for FM 359 / Fulshear-Gaston intersection. Revised per TxDOT comments; 2024-10-11 Updated signal plan set for FM 359 / Fulshear-Gaston intersection. Revised per TxDOT comments. Also included a comment response letter; 2024-12-06 Please see attached documentation from Fort Bend County, regarding their request to formally approve the signal now, based on prior correspondence with TxDOT and uncertainty over timing of future improvements

Site Information			
Site Name	FM 359 / Fulshear-Gaston Road / McKinnon Road intersection	Latitude	29.6846536
Site Address	11000 Farm to Market 359	Longitude	-95.84576179999999
City	Richmond	Is this parcel in current litigation?	No
State	TX	Control	0543
Zip Code	77406	Road Section	02
County	Fort Bend County		
Section	Fort Bend		

Application Information			
Permit Type	Traffic Signal	Number of requested driveway(s)	0
Highway	FM0359	Number of requested street tie-in(s)	0
Closest Cross Street	Fulshear-Gaston Road / McKinnon Road	Number of requested turn lanes	0
Is Highway within an incorporated city?	☐	No of Existing access(s) to be modified	0
City		Date of Signed & Sealed Plans Submitted	10/11/2024
Assigned Maintenance Section	Fort Bend	Type of highway design?	Open Ditch
Property on which side of highway?	Northbound	If open ditch, inside diameter of Pipes	n/a
Applicant Status	Complete - No Objections	Existing Roadway within 1000 ft	☒
External Link for Community Users	https://txdot.my.site.com/houstondrivewaypermit/houstondrivewaypermit/s/dp-application/a078y0000025aDI/TR24040066	Any drainage coming to TxDOT	☐
		If no, name of entity/agency/authority	n/a

Access Details	
Purpose of Request	request for a traffic signal at the intersection of FM 359 and Fulshear-Gaston Road / McKinnon Road in Ft. Bend County; TIA attached that include a TSWA that shows Warrants 1, 2 and 3 being met at the intersection
Background	previous application for traffic signal under TR22040053; cancelled by TxDOT (Cindy Kurtz) on Wednesday, April 17, 2024; directed to reapply for the traffic signal approval / permit using the TxDOT Houston District DAP system
Existing roadway characteristics	FM 359 has a three-lane northbound approach (L, T, R) and a two-lane southbound approach (L, T/R); Fulshear-Gaston Rd has a two-lane westbound approach (L, T/R); McKinnon Road has a one-lane eastbound approach (L/T/R). All roads at the intersection are asphalt pavement.
Environmental Clearance Requirements	
Agreements	local on-system agreement

Banner Message

Needs Attention 

Banner History

Cindy Kurtz : 8/5/2024
Please see comments.

Cindy Kurtz : 10/7/2024
Please see comments.

Cindy Kurtz : 11/22/2024
Please see comments.

Banner Mode

Permit Information

Permit Issued Date

1058 Status

Permit Expiration Date

Extension Issued Date

DocuSign Fields

c/o Account Name	c/o Halff Associates	Last Modified By	DP Mulesoft Integration, 1/23/2025, 12:19 PM
DSign Phone	(214) 217-6441		
Firm Address	1201 N. Bowser Road, Richardson, TX 75081		
Location	11000 Farm to Market 359, Richmond, TX 77406		
Created By	Stephen Moore, 4/30/2024, 11:33 AM		

Notes

Meeting		09/20/2024	
Last Modified	11/26/2024, 2:03 PM	Last Modified	9/23/2024, 3:24 PM
Owner	Cindy Kurtz	Owner	Cindy Kurtz
Text Preview	11/26/24 Meeting held with Stephen Moore and Suzanna Set. Updated TIA requested.	Text Preview	Agreement sent to FBC for approval.

Traffic

Last Modified	8/2/2024, 9:44 AM
Owner	Cindy Kurtz
Text Preview	Pending Teams to Suzanna.

Files

0 Candela TIA 10-22-2020.pdf		FULLY EXECUTED TR24040066	
Last Modified	1/23/2025, 12:20 PM	Last Modified	1/23/2025, 12:19 PM
Created By	DP Mulesoft Integration	Created By	DP Mulesoft Integration
RE_ Ft Bend Co Permit Application TR24040066		RE Traffic Signal Request FM 359 at Fulshear Gaston Road	
Last Modified	12/6/2024, 7:47 AM	Last Modified	12/6/2024, 7:47 AM
Created By	DP Mulesoft Integration	Created By	DP Mulesoft Integration
20241022-losa-txdot-fm-359-fulshear-gaston		1004F_Fulshear Ranch-Hines_Concept_09-04-24	
Last Modified	12/6/2024, 7:47 AM	Last Modified	12/6/2024, 7:47 AM
Created By	DP Mulesoft Integration	Created By	DP Mulesoft Integration

41736 FM 359 Fulshear Gaston signal design - comment response letter - 2024-1011

Last Modified 10/11/2024, 2:58 PM
Created By DP Mulesoft Integration

RE_ Ft Bend Co Permit Application TR24040066

Last Modified 10/7/2024, 7:25 AM
Created By DP Mulesoft Integration

41736_FM 359_FULSHEAR-GASTON_SIGNAL_PLAN_SET_2024-0903

Last Modified 9/4/2024, 12:20 PM
Created By DP Mulesoft Integration

41736 FM 359 Fulshear-Gaston intersection location map

Last Modified 5/6/2024, 2:21 PM
Created By DP Mulesoft Integration

0 Candela TIA 10-22-2020

Last Modified 5/6/2024, 2:21 PM
Created By DP Mulesoft Integration

41736_FM 359_FULSHEAR-GASTON_SIGNAL_PLAN_SET_2024-1011

Last Modified 10/11/2024, 2:58 PM
Created By DP Mulesoft Integration

41736_FM 359_FULSHEAR-GASTON_SIGNAL_PLAN_SET_2024-0903_TE Comments

Last Modified 10/7/2024, 7:25 AM
Created By DP Mulesoft Integration

41736_Traffic Signal Plans_TE_Comments

Last Modified 8/5/2024, 1:29 PM
Created By DP Mulesoft Integration

41736_Traffic Signal Plans

Last Modified 5/6/2024, 2:21 PM
Created By DP Mulesoft Integration

Activity History

Email: TxDOT DAP: TR24040066 – Application Paused Pending Your Response

Name	
Task	☒
Due Date	12/6/2024
Assigned To	Sambit Sourav Jena
Last Modified Date/Time	12/6/2024, 7:00 AM
	To: smoore@halff.com CC: hou-ftbend-permitapplication@txdot.gov BCC: Attachment: --none--
	Subject: TxDOT DAP: TR24040066 – Application Paused Pending Your Response Body: Dear Applicant,
	You previously received notification that a response from you was needed on your application TR24040066.
Comments	You permit application is awaiting further review until you respond. You will continue to receive this notification every two weeks until we receive your response. If after 2 months you have not responded and updated your TR, your application will be cancelled. However, you can submit a new application and include the previous TR number when you are ready to proceed with your access request. You will be able to view the submitted application only if you are the DAP login account holder or know the login credentials.Please click on the button below to login and review the application. Once selected, you will be navigated out to TxDOT.Click here to login and view your applicationIf the link above does not work, please copy and paste the URL below in a new browser window.https://txdot.my.site.com/houstondrivewaypermit/houstondrivewaypermit/s/dp-application/a078y0000025aDI/TR24040066

Agreement requested

Name
Task ☒
Due Date

**FM 359 / Fulshear-Gaston Road Intersection
Traffic Signal Location**



[illegible]

COUNTY _____ PROJ. NO. _____
HWY. NO. _____ LETTING DATE _____
DATE ACCEPTED _____

FORT BEND
FM 359 AND FULSHEAR GASTON ROAD

The map is a hand-drawn sketch of a road intersection. At the top left, a north arrow points upwards, labeled 'N'. Below it, a scale bar is marked with '0', '100', and '200'. The map shows several roads: 'FULSHEAR-KATY' running vertically on the left, 'McKINNON ROAD' running horizontally across the middle, and 'FULSHEAR-GASTON RD' running horizontally across the bottom. A diagonal road runs from the top center towards the bottom right. A circle is drawn at the intersection of McKinnon Road and Fulkshear-Gaston Rd. Various road numbers are shown in boxes: '1463' on the vertical road, '359' on McKinnon Road, '1093' on Fulkshear-Gaston Rd, and another '359' on the diagonal road. Other labels include 'SPRING GREEN' written vertically on the right side, 'Spring Green' written horizontally near a small square, and 'COUNTY', 'SHADE', and 'TOWN' written vertically on the bottom left. A large, semi-transparent 'In Process' watermark is overlaid across the center of the map.



FM 359

FUNCTIONAL CLASSIFICATION: MAJOR COLLECTOR
DESIGN SPEED = 55 MPH
2023 AADT: 13,509
2043 AADT: 23,332

INFORMATION TAKEN FROM TXDOT STATEWIDE PLANNING MAP



THE SEAL APPEARING ON THIS
DOCUMENT WAS AUTHORIZED BY:

Stephen M. Mason

10/11/2024



TBPELS ENGINEERING FIRM# F-312
 14800 ST. MARY'S LANE, SUITE 160
 HOUSTON, TEXAS 77079-2943
 TEL (713) 588-2450, FAX (281) 310-5259
 AVO: 041736.001

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/10/2024 9:02:11 AM USER:ar4648
FILE:4:1000s\41736\001\RCH\CADD\Sheet'sRCH\41736-SHEET_INDEX-01.dgn

INDEX OF SHEETS	
SHEET NO.	DESCRIPTION
GENERAL	
1	COVER SHEET
2	SHEET INDEX
3	GENERAL NOTES
4	ITEM SUMMARIES
5	SUMMARY OF SMALL SIGNS
TRAFFIC SIGNAL	
6	EXISTING CONDITIONS
7	PROPOSED TRAFFIC SIGNAL LAYOUT
8	PROPOSED SIGNAL DETAILS
9	PROPOSED STRIPING, PAVEMENT MARKINGS AND SIGNING
TRAFFIC CONTROL STANDARDS	
10 - 21	BC(1)-21 THRU BC(12)-21
22 - 23	WZ(BTS-1)-13 THRU WZ(BTS-2)-13
TRAFFIC SIGNAL STANDARDS	
24 - 30	ED(1)-14, ED(3)-14 THRU ED(6)-14, ED(8)-14 THRU ED(9)-14
31 - 32	SMA80 (1)-12 THRU SMA80 (2)-12
33	TS-FD-12
34	LUM-A-12
35	CFA-12
36	MA-C-12
37	MA-D-12
38	MA-DPD-20
39	TS-BP-20
40	OSNS/MD
41	SD/SCFD
42	SMD(GEN)-08
43	SMD(SLIP-1)-08
44	SMD(SLIP-2)-08
45	SMD(SLIP-3)-08
PAVEMENT MARKING STANDARDS	
46	PM(1)-22

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:



10/11/2024



14800 ST. MARY'S LANE,
SUITE 160
HOUSTON, TEXAS
77079-2943
TEL (713) 588-2450
TBPELS FIRM NO. F-312



Texas Department of Transportation
© 2023

FM 359 AND
FULSHEAR GASTON ROAD
SHEET INDEX

DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
LS				FM 359
DESIGNED				SHEET NO.
LS	STATE	DIST.	COUNTY	
CHECKED	TEXAS	HOUSTON	FORT BEND	
JG	CONT.	SECT.	JOB	
APPROVED				2
SM				

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE:TXDOT-OR_MON_PENTABLE.TBL

DATE:10/9/2024 2:06:19 PM USER:ar4648 FILE:TA:\410008\41736\001\NCH\CADD\Sheet'sRCH\41736-NOTES-01.dgn

NOTES FOR TRAFFIC SIGNALS:

1. INSTALL SIGNALS HORIZONTALLY ON MAST ARM, 17 FT.-6 IN. ABOVE THE ROADWAY.
2. FURNISH BLACK HOUSING FOR VEHICLE SIGNALS. FURNISH BLACK VEHICLE SIGNAL HEAD BACKPLATES WITH TWO INCH RETROREFLECTIVE YELLOW BORDER
3. FURNISH VEHICLE SIGNALS WITH LIGHT EMITTING DIODE (LED) SIGNAL LAMP UNITS.
4. USE TYPE B (HIGH INTENSITY PRISMATIC) OR TYPE D (DIAMOND GRADE) RETROREFLECTIVE SHEETING FOR SIGNS MOUNTED UNDER OR ADJACENT TO THE SIGNAL HEADS.
5. ROUTE CABLE FOR LUMINAIRES (#12/4C TRAY CABLE) TO THE SERVICE ENCLOSURE. SEE ELECTRICAL DETAIL SHEETS. DO NOT PASS LUMINAIRE CONDUCTORS THROUGH THE SIGNAL CONTROLLER CABINET.
6. FURNISH AND INSTALL FULL-ACTUATED CONTROLLER, WITH INTERNAL TIME BASE COORDINATION UNIT IN A BASE MOUNTED CABINET.
7. LOCATE CONTROLLER, STEEL MAST ARM POLES, DETECTORS, RADAR DETECTION, ETC., AS APPROVED.
8. REPAIR OR REPLACE PAVEMENT AND SIDEWALKS DAMAGED BY THE CONTRACTOR'S FORCES DURING CONSTRUCTION AT NO COST TO TXDOT.
9. FURNISH AND INSTALL DUCT SEAL TO ENCLOSE THE ENDS OF EACH CONDUIT CONTAINING SIGNAL CABLE.
10. INSTALL A CLOSED NIPPLE WITH LOCK NUT AND BUSHINGS (SIZE AS REQUIRED) WHERE THE CABLE ENTERS THE UPPER PORTION OF THE SIGNAL POLE.
11. DO NOT PLACE SIGNAL HEADS OVER THE ROADWAY UNTIL ALL NECESSARY MATERIALS ARE ON HAND AS APPROVED.
12. INSTALL TWO SET SCREWS ON ALL VEHICLE SIGNAL HEAD MOUNTING HARDWARE FITTINGS.
13. WRAP SIGNAL HEADS WITH DARK PLASTIC OR SUITABLE MATERIAL TO CONCEAL THE SIGNAL FACES FROM THE TIME OF INSTALLATION UNTIL PLACING INTO OPERATION. DO NOT USE BURLAP.
14. FURNISH AND INSTALL RADAR PRESENCE DETECTION DEVICE, RADAR ADVANCE DETECTION DEVICE, 4-CHANNEL INPUT FILE CARDS, TRAFFIC CABINET PREASSEMBLED MOUNTING HARDWARE, AND CABLE FOR A COMPLETE FUNCTIONAL RADAR VEHICLE DETECTION SYSTEM AT THE INTERSECTION.
15. THE LOCATION OF THE RADAR DETECTION ZONE IS APPROXIMATE. THE EXACT LOCATION WILL BE DETERMINED BY THE ENGINEER AND/OR THE DEPARTMENT TRAFFIC OPERATIONS SECTION.
16. THE RADAR PRESENCE DETECTOR AND RADAR ADVANCE DETECTION DEVICES MUST BE COMPATIBLE WITH EACH OTHER AND FROM THE SAME MANUFACTURER.
17. THE CONTRACTOR SHALL FOLLOW MANUFACTURERS SPECIFICATIONS FOR RADAR VEHICLE DETECTION SYSTEM INSTALLATION.
18. INSTALL A 5/8-IN. (MINIMUM) EYE BOLT FOR THE POINT OF ATTACHMENT BELOW THE SERVICE ENTRANCE WEATHERHEAD FOR THE SERVICE DROP TO STEEL OR WOOD POLE.
19. AIM LUMINAIRE ARMS MOUNTED ON TRAFFIC SIGNAL POLES PERPENDICULAR TO THE CENTERLINE OF THE ROADWAY IT IS INTENDED TO COVER TO DEVELOP THE PROPER ILLUMINATION PATTERN FOR THE INTERSECTION.
20. PROVIDE 250 WATT HPS EQUIVALENT LIGHT EMITTING DIODE (LED) LAMP LUMINAIRES OPERATING AT 240 VOLTS.
21. CAP SPARE CONDUITS INSTALLED IN POLE FOUNDATIONS AND GROUND BOXES USING APPROVED CAPPING DEVICES.
22. GROUND STEEL MAST ARM POLE ASSEMBLIES IN ACCORDANCE WITH REQUIREMENTS SHOWN ON THE LATEST TRAFFIC SIGNAL POLE FOUNDATION STANDARD. USE THE GROUNDING LUG ON THE POLE TO GROUND THE POLE TO THE EQUIPMENT GROUND CONDUCTORS FROM THE CONDUITS.

23. VERIFY THE CORRECT MAST ARM POLE LENGTHS FOR EACH SIGNALIZED INTERSECTION PRIOR TO ORDERING THE EQUIPMENT.
24. ELECTRICAL POWER TO OPERATE THE TRAFFIC SIGNAL INSTALLATION(S) WILL BE PLACED IN TXDOT'S NAME. THIS INCLUDES ALL POWER TO OPERATE THE SIGNAL (S) DURING THE VARIOUS PHASES OF CONSTRUCTION AND DURING THE TEST PERIOD PRIOR TO ACCEPTANCE OF THE WORK BY THE DEPARTMENT.
25. THE TRAFFIC SIGNAL CONSTRUCTION AND MAINTENANCE OFFICE WILL PROVIDE PHASING AND TIMINGS FOR PERMANENT TRAFFIC SIGNALS.
26. REMOVE ANY EXISTING STOP SIGNS, IF NECESSARY.
27. ASSUME OWNERSHIP OF THE REMOVED EXISTING SIGNS.
28. REFER TO TXDOT'S WEBSITE FOR PREQUALIFIED PRODUCTS LIST REGARDING RADAR DETECTION, VEHICLE LED TRAFFIC SIGNAL LAMP UNIT, CONDUIT, CONDUCTORS, GROUND BOXES, AND ELECTRIC SERVICE. CHECK WEBSITE PERIODICALLY FOR CURRENT UPDATES.
29. GROUND ALL EXISTING METAL GROUND BOX COVERS AS OUTLINED ON LATEST STANDARD SHEET ED (4)-14. REPLACEMENTS FOR THESE GROUND BOXES MUST BE MADE OF POLYMER CONCRETE AS DETAILED ON THE LATEST STANDARD SHEET ED (4)-14. THE MATERIALS AND LABOR ASSOCIATED WITH THIS WORK IS SUBSIDIARY TO VARIOUS BID ITEMS IN THE PROJECT.
30. THE CONTRACTOR IS RESPONSIBLE FOR THE SIGNAL CARRYING CAPABILITY AND PERFORMANCE OF THE CABLE. INSTALL EACH WIRE WITH A LIGHTNING PROTECTION DEVICE UNLESS OTHERWISE NOTED.
31. FURNISH ALL MATERIALS. SUPPLY THE CONTROLLER PHASE SEQUENCE, DETECTOR UNITS, DETECTOR CARD RACK, AND POWER SUPPLY, TO TXDOT'S SIGNAL SHOP, 6810 KATY ROAD, HOUSTON, TEXAS, FORTY FIVE (45) DAYS IN ADVANCE FOR INSPECTION, SET UP, AND TESTING. CONTACT MR. MICHAEL AWA, P.E., IN WRITING, AT LEAST FIFTEEN (15) WORKING DAYS PRIOR TO PICKING UP THE MATERIALS.
32. CONTRACTOR SHOULD PICK UP THE CELLULAR MODEM WITH ANTENNA AND POWER SUPPLY FROM THE TXDOT SIGNAL SHOP, 6810 OLD KATY ROAD, HOUSTON, TEXAS 77007. CONTRACTOR SHOULD CONTACT ARNOLD TREVINO AT 713-866-7101 AT LEAST TWO WEEKS IN ADVANCE TO ARRANGE FOR PICKUP TIME.
33. RADAR PRESENCE DETECTION DEVICE MUST UTILIZE TRUE- PRESENCE DETECTION. SYSTEMS USING LOCKING ALGORITHMS TO ATTEMPT PRESENCE DETECTION WILL NOT BE ACCEPTED.
34. RADAR ADVANCE DETECTION DEVICE MUST CONTINUOUSLY TRACK VEHICLE SPEED, DISTANCE, AND ESTIMATED TIME OF ARRIVAL.
35. COMMUNICATION AND POWER TO THE RADAR DEVICES SHALL BE VIA CONTINUOUS CABLE RUN OF UP TO 1000 FEET WITH THE USE OF REPEATERS.
36. FINAL PLACEMENT OF RADAR DEVICES TO BE APPROVED BY TXDOT ENGINEER.

ADDRESS:
TEXAS DEPARTMENT OF TRANSPORTATION
P.O. BOX 1386
HOUSTON, TEXAS 77251-1386
TEL NO. (713) 802-5661

37. THE RADAR PRESENCE DETECTOR AND RADAR ADVANCE DETECTION DEVICES MUST BE COMPATIBLE WITH EACH OTHER AND FROM THE SAME MANUFACTURER.
38. RADAR PRESENCE DETECTION DEVICE MUST UTILIZE TRUE-PRESENCE DETECTION. SYSTEM USING LOCKING ALGORITHMS TO ATTEMPT PRESENCE DETECTION WILL NOT BE ACCEPTED.
39. THE VENDORS REPRESENTATIVES OF THE RADAR EQUIPMENT SUPPLIED FOR THIS PROJECT MUST SUPERVISE THE INSTALLATION, SETUP AND TESTING OF THIS EQUIPMENT AND BE FACTORY CERTIFIED. THE REPRESENTATIVE MUST BE ON SITE DURING THIS TIME. ANY EQUIPMENT REQUIRED FOR SETUP AND OPERATION OF THE RADAR DEVICES MUST BE PROVIDED TO TXDOT OR THE CITY UPON COMPLETION. THE VENDORS REPRESENTATIVE MUST PROVIDE TRAINING TO THE MUNICIPALITIES WHO WILL BE RESPONSIBLES FOR THE MAINTENANCE OF THE RADAR EQUIPMENT AFTER ACCEPTANCE OF THE PROJECT.

40. THE CONTRACTOR TO FURNISH AND INSTALL ALL EQUIPMENT CALLED FOR AND REQUIRED AS NEEDED FOR A FULLY OPERATIONAL TRAFFIC SIGNAL.

41. REMOVE THE EXISTING PAVEMENT MARKING AS DIRECTED. REMOVE THE PAVEMENT MARKING TO THE EXTENT THAT THEY ARE EITHER COMPLETELY REMOVED OR OBLITERATED TO THE SATISFACTION OF THE ENGINEER.

42. PLACE PAVEMENT MARKINGS AS SHOWN ON THE PLANS OR AS DIRECTED.

43. CONTRACTOR TO ADJUST SIGNAL HEAD ALIGNMENT, AS NEEDED, USING ARTICULATING SIGNAL BRACKET ASSEMBLIES WITH A MINIMUM OF THREE ADJUSTABLE AXES.

44. SEAL WITH WATERPROOF SEALANT EACH END OF THE COMMUNICATIONS CABLE THAT IS EXPOSED TO THE ELEMENTS DURING STORAGE OR AFTER INSTALLATION.

45. SEAL ENDS OF ALL CONDUITS WITH DUCT SEAL, EXPANDABLE FOAM, OR BY OTHER METHODS APPROVED BY THE ENGINEER. SEAL CONDUIT IMMEDIATELY AFTER COMPLETION OF CONDUCTOR INSTALLATION AND PULL TESTS. DO NOT USE DUCT TAPE AS PERMANENT CONDUIT SEALANT. DO NOT USE SILICON CAULK AS A CONDUIT SEALANT.

46. FURNISH ALL MATERIALS. SUPPLY THE CONTROLLER WITH DETECTION PHASE SEQUENCE, DETECTOR UNITS, DETECTOR CARDS, DETECTOR CARD RACK, AND POWER SUPPLY, TO THE DEPARTMENT'S SIGNAL SHOP, 6810 KATY ROAD, HOUSTON, TEXAS FORTY FIVE (45) DAYS IN ADVANCE FOR INSPECTION, SET UP, AND TESTING. CONTACT MR. MICHAEL AWA, P. E., IN WRITING, AT LEAST FIFTEEN (15) WORKING DAYS PRIOR TO PICKING UP THE MATERIALS.

ADDRESS:
TEXAS DEPARTMENT OF TRANSPORTATION
P.O. BOX 1386
HOUSTON, TEXAS 77251-1386
TEL NO. (713) 802-5661

47. THE DEPARTMENT'S TRAFFIC SIGNAL MAINTENANCE OFFICE WILL PROVIDE PHASING FOR PERMANENT TRAFFIC SIGNALS.

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

Signature 10/11/2024



FM 359 AND
FULSHEAR GASTON ROAD
GENERAL NOTES

DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
LS				FM 359
DESIGNED				SHEET NO.
LS	STATE	DIST.	COUNTY	
CHECKED	TEXAS	HOUSTON	FORT BEND	
JG	CONT.	SECT.	JOB	
APPROVED				
SM				

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/11/2024 11:06:52 AM USER:ar4648
FILE:TA: \41000s\41736\001\RCH\CADD\Sheet'sRCH\41736-SUMM-01.dgn

TRAFFIC SIGNAL ESTIMATED QUANTITIES			
ITEM CODE	ITEM DESCRIPTION	QUANTITY	UNIT
416 7044	DRILL SHAFT (TRF SIG POLE) (36 IN)	53	LF
618 7060	CONDT (PVC) (SCHD 80) (3")	108	LF
618 7061	CONDT (PVC) (SCHD 80) (3") (BORE)	259	LF
618 7064	CONDT (PVC) (SCHD 80) (4")	272	LF
618 7065	CONDT (PVC) (SCHD 80) (4") (BORE)	518	LF
620 7007	ELEC CONDR (NO. 8) BARE	1157	LF
620 7008	ELEC CONDR (NO. 8) INSULATED	64	LF
621 7006	TRAY CABLE (4 CONDR) (12 AWG)	663	LF
624 7008	GROUND BOX TY D (162922) W/APRON	5	EA
628 7148	ELC SRV TY D 120/240 060(NS)SS(E)SP(O)	1	EA
636 7001	ALUMINUM SIGNS (TY A)	50	SF
	*SIGN, "FM 359"	2	EA
	*SIGN, "FULSHEAR GASTON RD"	2	EA
	*SIGN, R10-17T	1	EA
666 7184	RE PM TY II (W) 24" (SLD)	60	LF
666 7352	PAVEMENT SLER 24"	60	LF
678 7008	PAV SURF PREP FOR MRK (24")	60	LF
680 7002	INSTALL HWY TRAFFIC SIG (ISOLATED)	1	EA
	*TRAFFIC SIGNAL CONTROLLER, FULLY ACTUATED	1	EA
	*TRAFFIC SIGNAL CABINET	1	EA
	*CONTROLLER CABINET FOUNDATION	1	EA
	*18" CABINET BASE EXTENSION	1	EA
	*FIELD MONITORING UNIT	1	EA
	*ROD, 5/8"X10" COPPER-CLAD GROUND (FOR CONTROLLER)	1	EA
	*DETECTOR PROCESSOR	1	EA
	*LED RDWY LUMINAIRE (250W H.P.S EQUIVALENT)	4	EA
	*MAST ARM DAMPING PLATE	4	EA
	*DETECTOR UNIT (DUAL CHANNEL)	1	EA
	*DETECTOR CARD RACK (8 SLOT)	1	EA
	*DETECTOR CARD RACK (4 SLOT)	1	EA
682 7001	VEH SIG SEC (12 IN) LED (GRN)	8	EA
682 7002	VEH SIG SEC (12 IN) LED (GRN ARW)	3	EA
682 7003	VEH SIG SEC (12 IN) LED (YEL)	8	EA
682 7004	VEH SIG SEC (12 IN) LED (YEL ARW)	4	EA
682 7005	VEH SIG SEC (12 IN) LED (RED)	8	EA
682 7006	VEH SIG SEC (12 IN) LED (RED ARW)	5	EA
682 7037	BACK PLATE W/ REFL BRDR (4 SEC)	3	EA
682 7054	BACK PLATE W/ REFL BRDR (3 SEC)	8	EA
684 7012	TRF SIG CBL (TY A) (12 AWG) (7 CONDR)	1309	EA
685 7041	INS TRF PL AM(S)1 (40')	1	EA
686 7043	INS TRF PL AM(S)1 (40') LUM	3	EA
6007 7001	BBU SYSTEM (EXTERNAL BATT CABINET)	1	EA
6008 7001	RVDS (PRESENCE DETECTION ONLY)	4	EA
	*18 AWG 2 CONDR CABLE/22 AWG 4 CONDR CABLE	748	LF
6008 7002	RVDS (ADVANCE DETECTION ONLY)	2	EA
	*18 AWG 2 CONDR CABLE/22 AWG 4 CONDR CABLE	448	LF
**6061 6001	GPS COMMUNICATIONS UNIT	1	EA

* SUBSIDIARY ITEMS
** 2014 ITEM CODE IS USED. NO 2024 SPEC FOUND FOR ITEM.

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

 10/11/2024



14800 ST. MARY'S LANE,
SUITE 160
HOUSTON, TEXAS
77079-2943
TEL (713) 588-2450
TBPELS FIRM NO. F-312




ITEMS SUMMARIES


DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
LS				FM 359
DESIGNED				SHEET NO.
LS	STATE	DIST.	COUNTY	
CHECKED	TEXAS	HOUSTON	FORT BEND	
JG	CONT.	SECT.	JOB	
APPROVED				4
SM				

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/11/2024 11:22:56 AM USER:ar4648
FILE:TA: \410008\41736\001\NCH\CADD\Sheet\SRCH\41736-1R-SONL-00.dgn

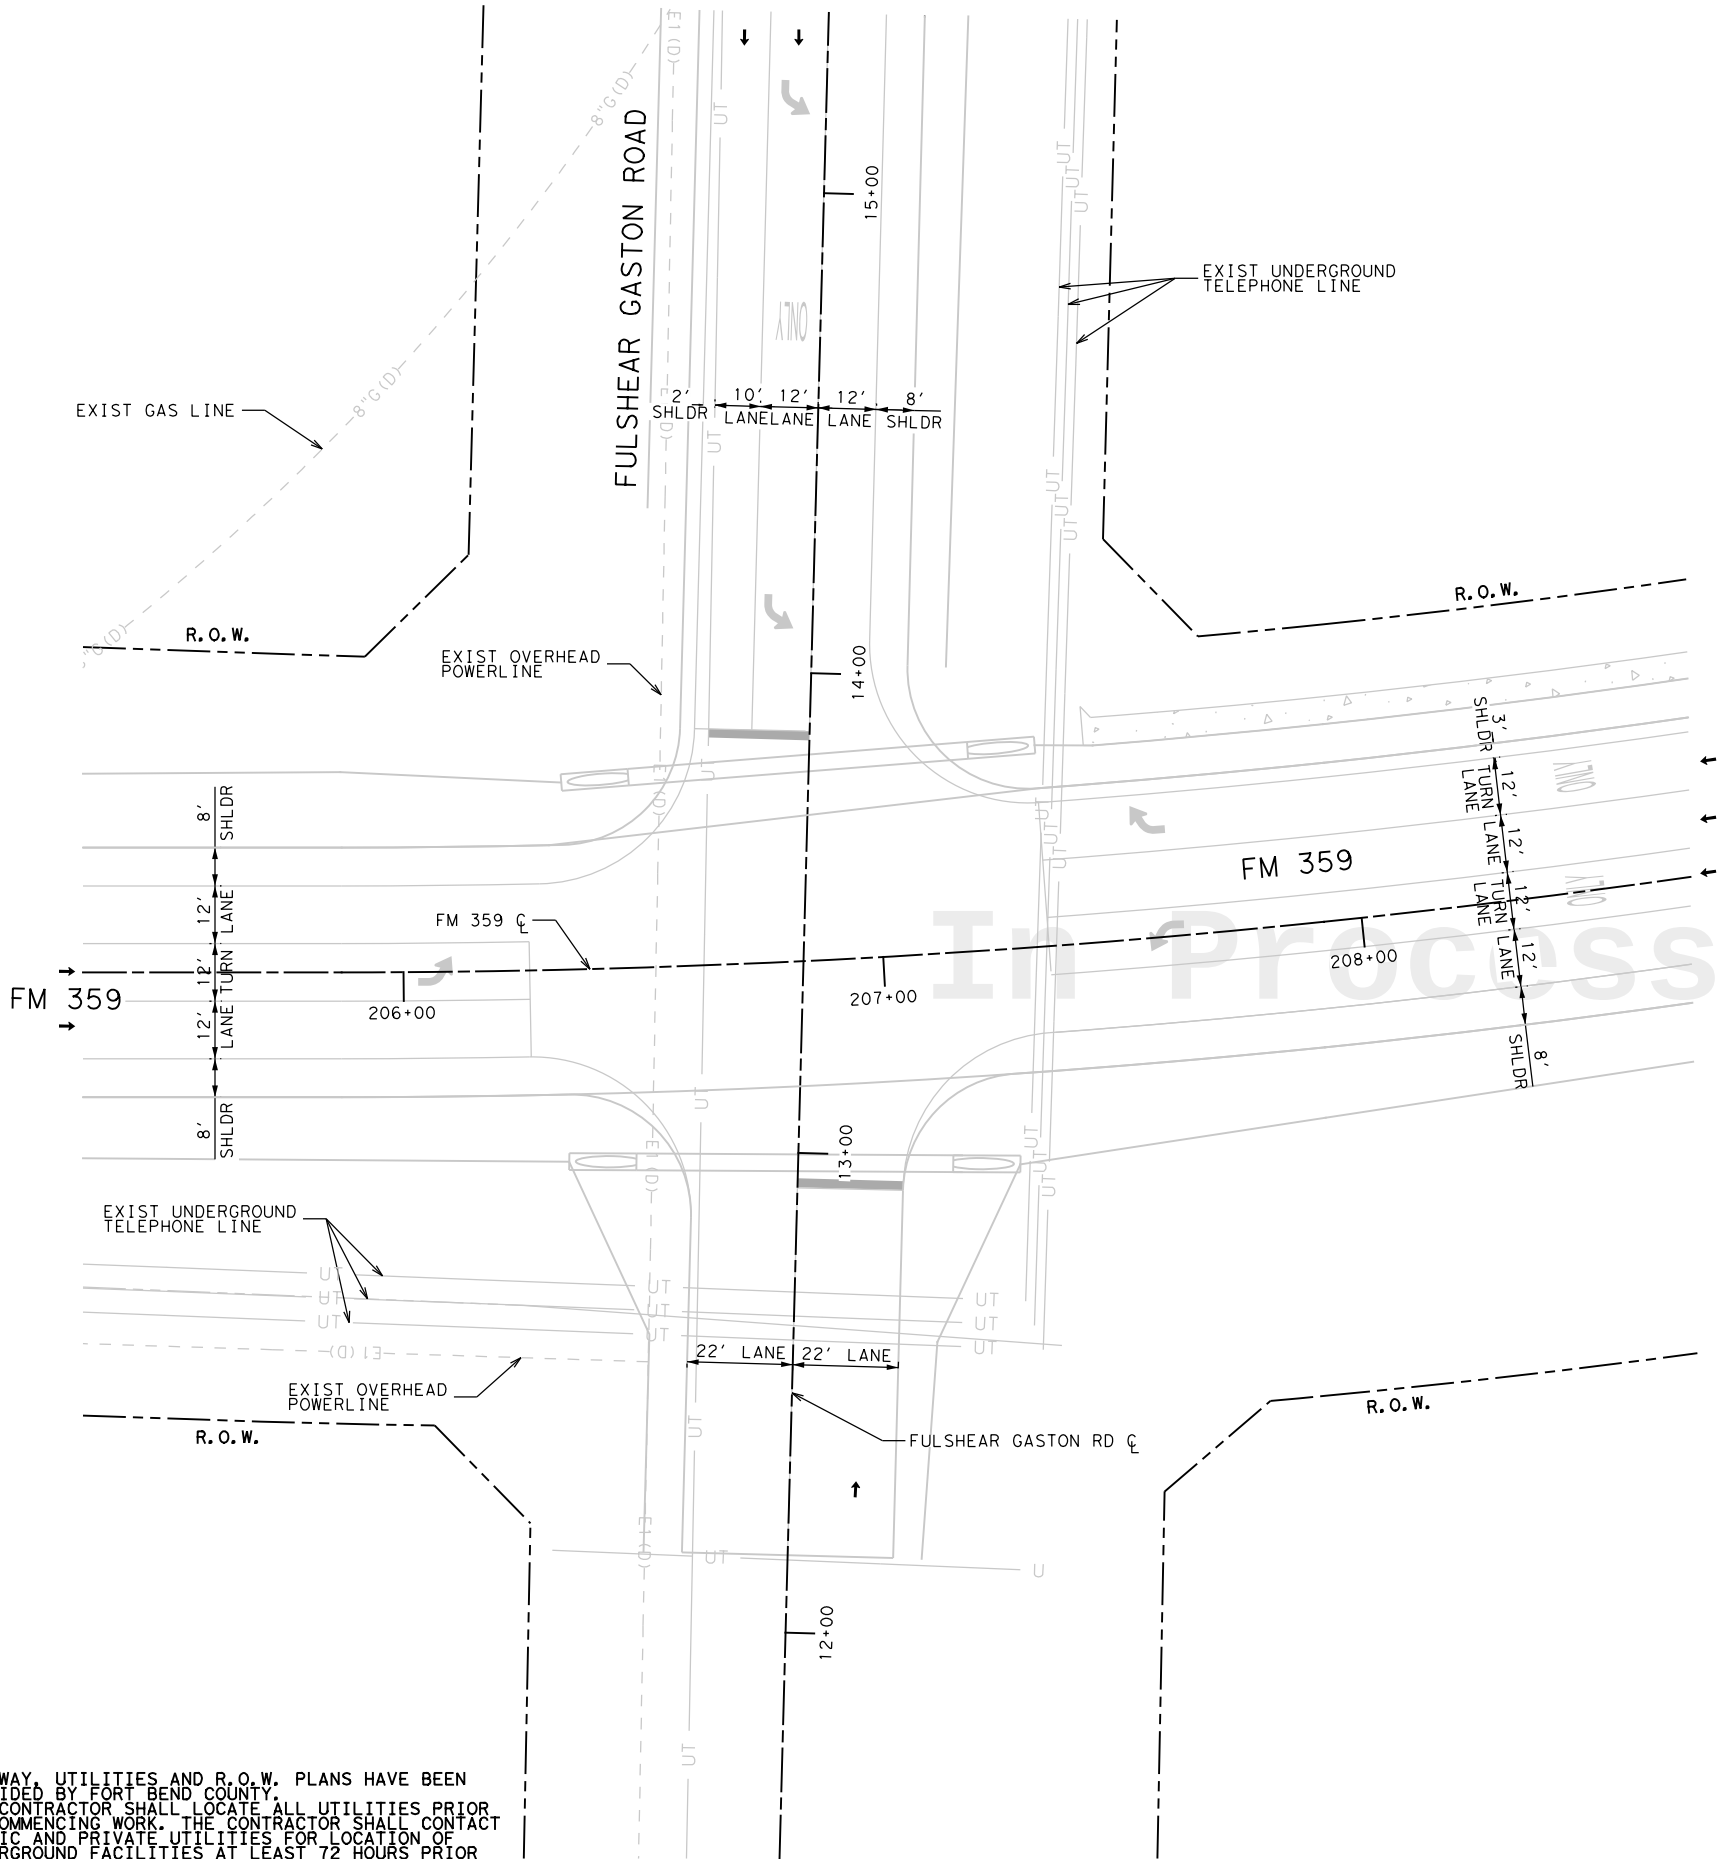

- NOTES:
1. ROADWAY, UTILITIES AND R.O.W. PLANS HAVE BEEN PROVIDED BY FORT BEND COUNTY.
 2. THE CONTRACTOR SHALL LOCATE ALL UTILITIES PRIOR TO COMMENCING WORK. THE CONTRACTOR SHALL CONTACT PUBLIC AND PRIVATE UTILITIES FOR LOCATION OF UNDERGROUND FACILITIES AT LEAST 72 HOURS PRIOR TO ANY DRILLING, BORING, TRENCHING, OR EXCAVATING.
 3. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY DAMAGE CAUSED BY THE CONTRACTOR'S FAILURE TO LOCATE AND PRESERVE THESE UTILITIES, WHETHER UNDERGROUND, ABOVE GROUND, OR OVERHEAD.



LEGEND

- R.O.W.
- UT — UNDERGROUND TELECOM LINE
- G — GAS LINE
- E — ELECTRICAL LINE

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:
Signature 10/11/2024



14800 ST. MARY'S LANE,
SUITE 160
HOUSTON, TEXAS
77079-2943
TEL (713) 588-2450
TBPELS FIRM NO. F-312




FM 359 AND
FULSHEAR GASTON ROAD
EXISTING CONDITIONS


DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
LS			FM 359
DESIGNED			
LS	STATE	DIST.	COUNTY
CHECKED	TEXAS	HOUSTON	FORT BEND
JG	CONT.	SECT.	JOB
APPROVED			
SM			

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/11/2024 2:47:50 PM USER:ar4648 FILE:TA: \410008\41736\001\NCH\CAD\Drawings\Sheet\CHN\41736-1R-SGNL-01.dgn

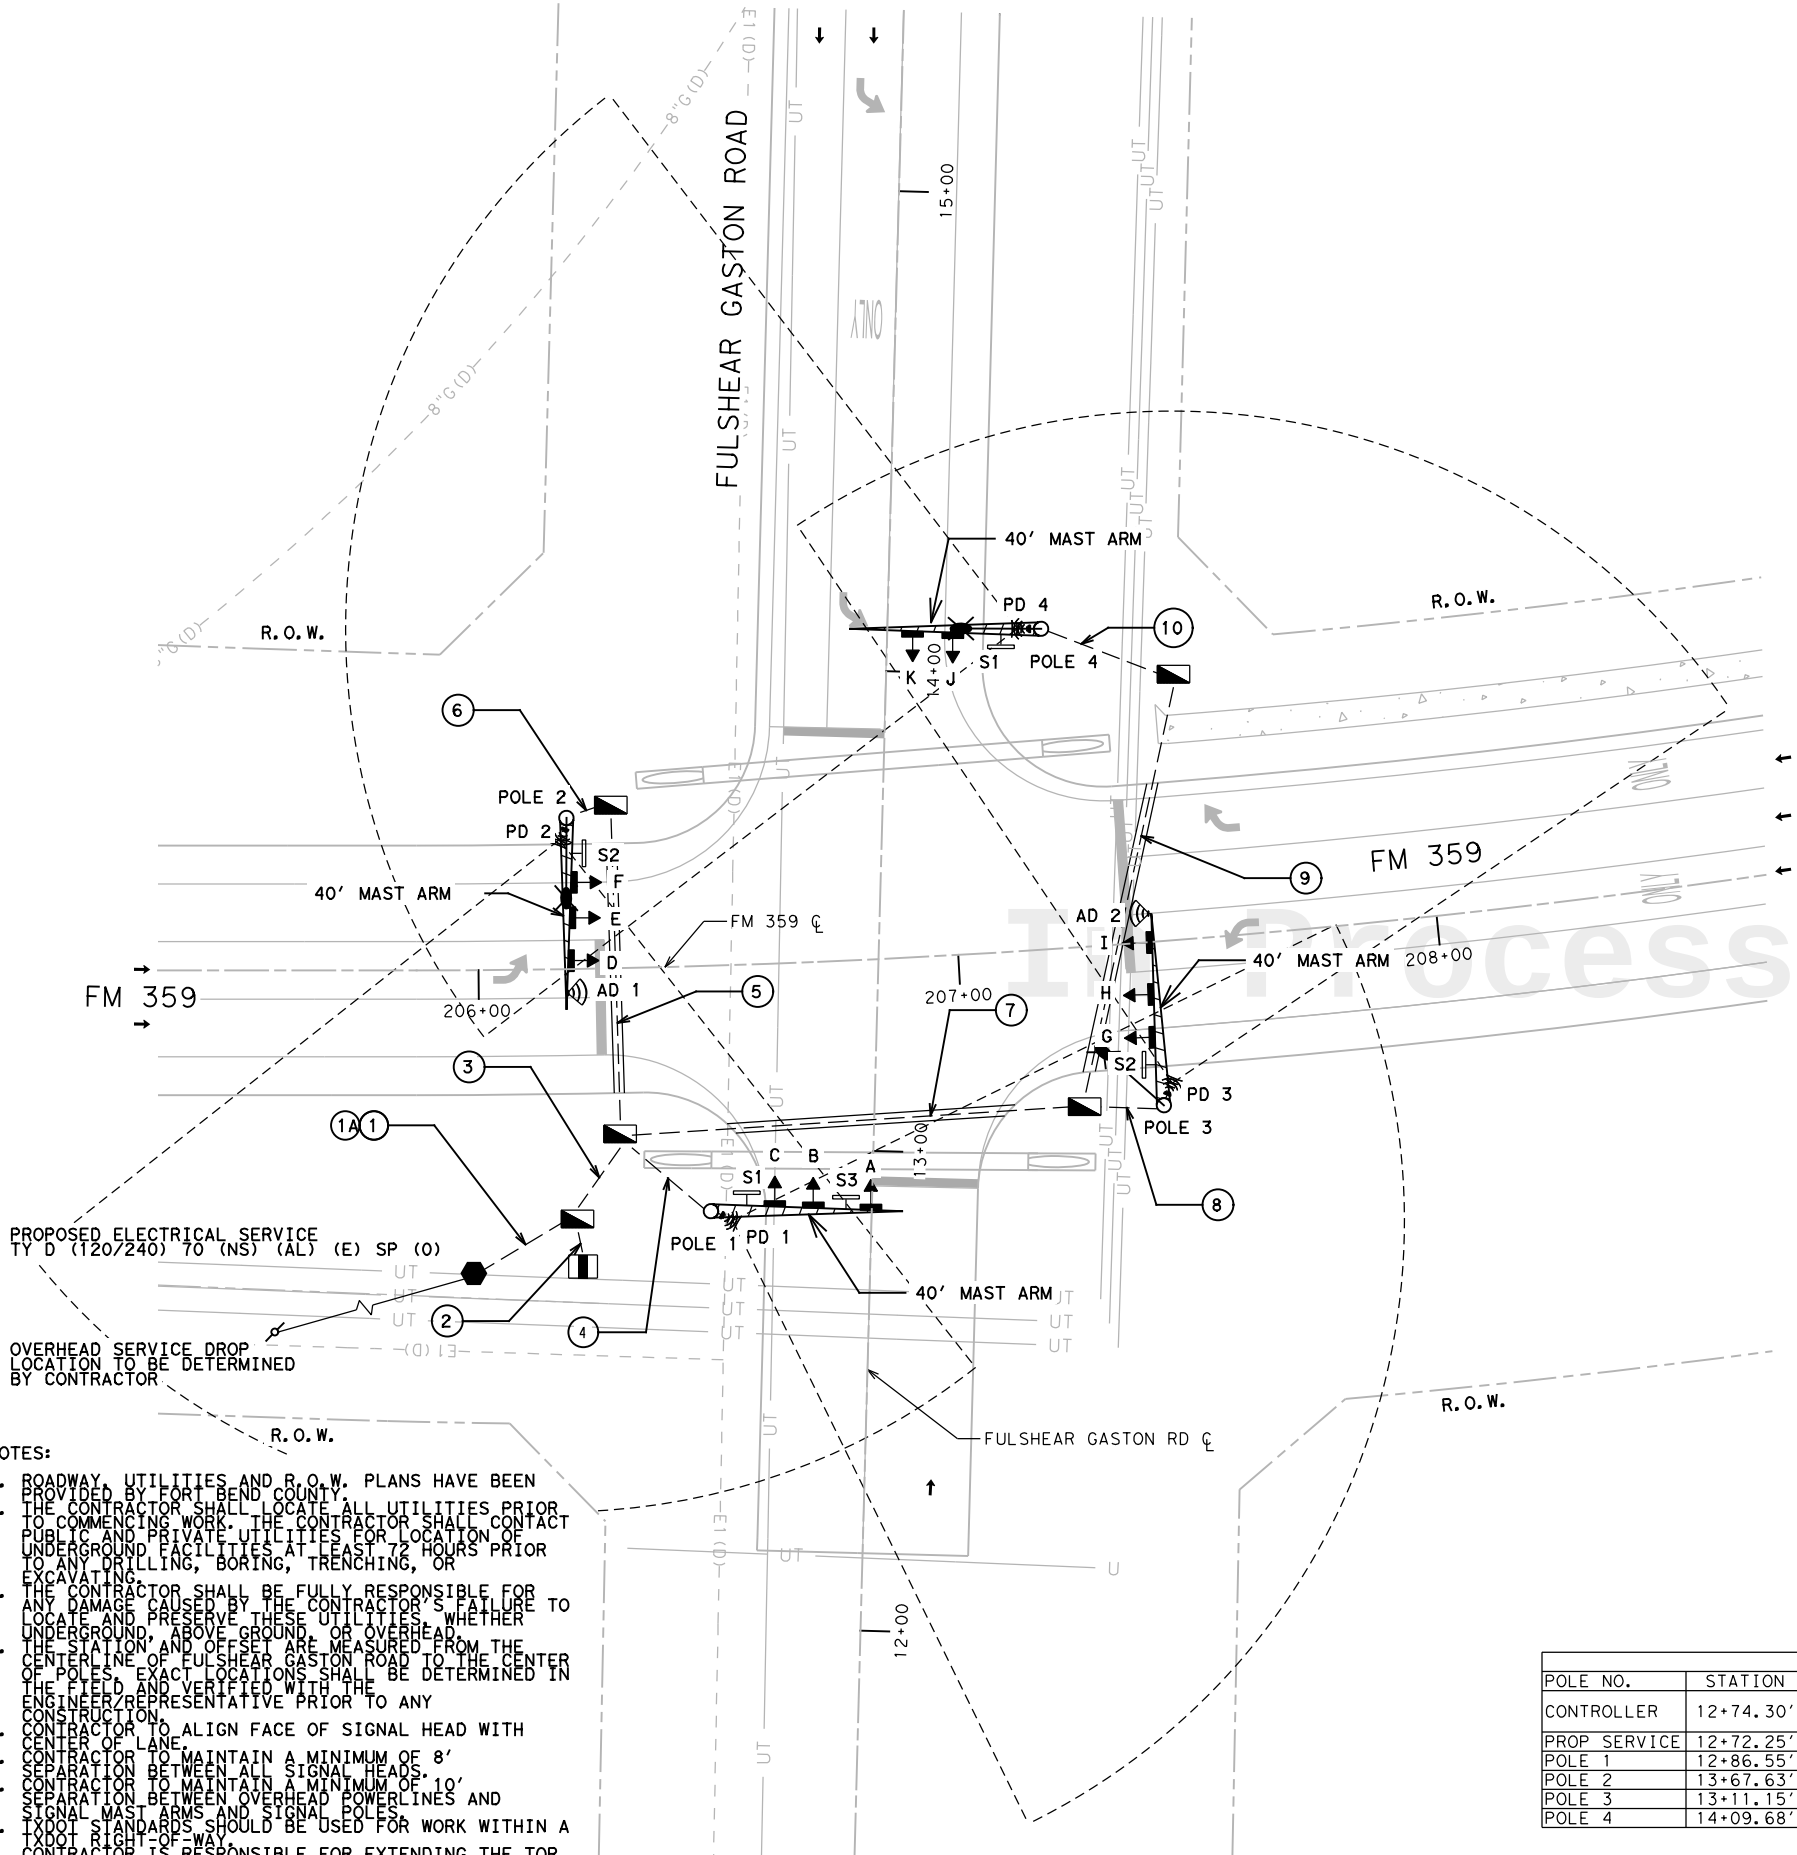




- NOTES:
1. ROADWAY, UTILITIES AND R.O.W. PLANS HAVE BEEN PROVIDED BY FORT BEND COUNTY.
 2. THE CONTRACTOR SHALL LOCATE ALL UTILITIES PRIOR TO COMMENCING WORK. THE CONTRACTOR SHALL CONTACT PUBLIC AND PRIVATE UTILITIES FOR LOCATION OF UNDERGROUND FACILITIES AT LEAST 72 HOURS PRIOR TO ANY DRILLING, BORING, TRENCHING, OR EXCAVATING.
 3. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR ANY DAMAGE CAUSED BY THE CONTRACTOR'S FAILURE TO LOCATE AND PRESERVE THESE UTILITIES, WHETHER UNDERGROUND, ABOVE GROUND, OR MEASURED FROM THE CENTERLINE OF FULSHEAR GASTON ROAD TO THE CENTER OF POLES. EXACT LOCATIONS SHALL BE DETERMINED IN THE FIELD AND VERIFIED WITH THE ENGINEER/REPRESENTATIVE PRIOR TO ANY CONSTRUCTION.
 4. THE CONTRACTOR SHALL ALIGN FACE OF SIGNAL HEAD WITH CENTER OF LANE.
 5. CONTRACTOR TO MAINTAIN A MINIMUM OF 8' SEPARATION BETWEEN ALL SIGNAL HEADS.
 6. CONTRACTOR TO MAINTAIN A MINIMUM OF 10' SEPARATION BETWEEN OVERHEAD POWERLINES AND SIGNAL MAST ARMS AND OVERHEAD POLES.
 7. TXDOT STANDARDS SHOULD BE USED FOR WORK WITHIN A TXDOT RIGHT-OF-WAY.
 8. CONTRACTOR IS RESPONSIBLE FOR EXTENDING THE TOP OF THE SIGNAL POLE DRILL SHAFTS TO AN ELEVATION SUCH THAT THE SIGNAL MAST ARM AND SIGN ELEVATION MEET MINIMUM CLEARANCE REQUIREMENTS OVER THE ROADWAY SURFACE, AS NOTED IN TXDOT STANDARD DETAIL SMA-80(T)-12. ADDITIONAL LABOR AND MATERIALS NECESSARY TO EXTEND THE TOPS OF THE DRILL SHAFTS SHALL BE SUBSIDIARY TO ITEM 416.




LEGEND

- R.O.W.
- SIGNAL POLE/MAST ARM ASSEMBLY
- LUMINAIRE
- SIGNAL HEAD AND NUMBER
- CONTROLLER CABINET
- ELECTRICAL SERVICE
- GROUND BOX TYPE D
- CONDUIT RUN NUMBER
- RADAR PRESENCE DETECTION DEVICE
- RADAR ADVANCE DETECTION DEVICE
- RADAR PRESENCE DETECTION ZONE
- CONDUIT
- CONDUIT BORE
- MAST ARM MOUNTED SIGN
- UT --- UNDERGROUND TELECOM LINE
- G --- GAS LINE
- E --- ELECTRICAL LINE

PROPOSED LED TRAFFIC SIGNAL HEADS



PROPOSED SIGNS



*SEE PROPOSED SIGNAL DETAILS SHEET FOR STREET NAME SIGNING DETAILS

PROPOSED POLE SUMMARY			
POLE NO.	STATION	OFFSET	DESCRIPTION
CONTROLLER	12+74.30'	59.83' LT	GROUND MOUNTED CABINET W/ CONTROLLER ON CONCRETE (BASE) FOUNDATION W/ BBU
PROP SERVICE	12+72.25'	82.57' LT	METER POLE W/ SAFETY SWITCH
POLE 1	12+86.55'	33.48' LT	30' POLE W/ 40' MAST ARM
POLE 2	13+67.63'	65.79' LT	30' POLE W/ 40' MAST ARM W/ LUMINAIRE
POLE 3	13+11.15'	60.25' RT	30' POLE W/ 40' MAST ARM W/ LUMINAIRE
POLE 4	14+09.68'	32.02' RT	30' POLE W/ 40' MAST ARM W/ LUMINAIRE

NO.	DATE	REVISION	APPROVED




THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

10/11/2024



14800 ST. MARY'S LANE,
SUITE 160
HOUSTON, TEXAS
77079-2943
TEL (713) 588-2450
TBPELS FIRM NO. F-312



FM 359 AND
FULSHEAR GASTON ROAD
PROPOSED TRAFFIC SIGNAL

DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
LS			FM 359
DESIGNED			
LS	STATE	DIST.	COUNTY
CHECKED	TEXAS	HOUSTON	FORT BEND
JG	CONT.	SECT.	JOB
APPROVED			7
SM			

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/11/2024 11:05:26 AM USER:cr4648
FILE:PA: \410008\41736\001\CH\CADD\Sheet\SRCH\41736-1R-SGNL-03.dgn

PROPOSED ELECTRICAL SCHEDULE											
RUN NO	CONDUIT (618) PVC				LENGTH	CONDUCTORS (620)		TRAY CABLE (621)	CABLES (684)	RADAR DETECTION CABLE (6008)	
	3" (SCHD 80)		4" (SCHD 80)			GROUND	POWER	LUMINAIRE	VEHICLE SIGNAL	PRESENCE	ADVANCE
	TRENCH	BORE	TRENCH	BORE		#8 BARE	#8 INSULATED	#12/4C TRAY	#12/7C	#18/2C & #22/4C	#18/2C & #22/4C
	(7060)	(7061)	(7064)	(7065)	LF	(7007)	(7008)	(7006)	(7012)	(7001)	(7002)
	NO.	NO.	NO.	NO.		NO.	NO.	NO.	NO.	NO.	NO.
	EA	EA	EA	EA		EA	EA	EA	EA	EA	EA
1			1		24	1	2				
1A			1		24	1		3			
2	1		3		8	4	2		7	4	2
3	1		2		20	3		3	7	4	2
4	1		2		25	3			2	1	
5		1		2	69	3		1	2	1	1
6	1		2		10	3		1	2	1	1
7		1		2	97	3		2	3	2	1
8	1		2		16	3		1	2	1	1
9		1		2	93	3		1	1		
10	1		2		29	3		1	1	1	
TOTAL	108	259	272	518	415	1157	64	543	849	548	248

POLE DETAILS				FOUNDATION	CONDUIT/CABLE IN POLES			
POLE NUMBER	DESCRIPTION				36" DIA.	NO. 8 XHHW (LUM)	7/C	RADAR 18/2C
POLE 1	INS	TRF	SIG	PL AM(S) 1 ARM (40')	13.2		130	20
POLE 2	INS	TRF	SIG	PL AM(S) 1 ARM (40') LUM	13.2	40	130	80
POLE 3	INS	TRF	SIG	PL AM(S) 1 ARM (40') LUM	13.2	40	130	80
POLE 4	INS	TRF	SIG	PL AM(S) 1 ARM (40') LUM	13.2	40	70	20

RADAR DETECTION CHART		
DETECTOR	SETTINGS	FUNCTION
PD1	PRESENCE	CALL & EXTEND EASTBOUND APROACH
PD2	PRESENCE	CALL & EXTEND SOUTHBOUND APROACH
PD3	PRESENCE	CALL & EXTEND NORTHBOUND APROACH
PD4	PRESENCE	CALL & EXTEND WESTBOUND APROACH
AD1	ADVANCE	EXTEND NORTHBOUND APROACH
AD2	ADVANCE	EXTEND SOUTHBOUND APROACH

ELECTRICAL SERVICE DATA SHEET												
ELECTRICAL SERVICE ID	ELECTRICAL SERVICE	ELECTRICAL SERVICE DESCRIPTION (SEE ED (5&6)-14)	SERVICE CONDUIT SIZE	SERVICE CONDUCTORS	SAFETY SWITCH AMPS	MAIN CKT. BKR. POLE/AMP	TWO-POLE CONTACTOR AMPS	PANEL BD/ LOADCENTER	CIRCUIT USE	BRANCH CKT. BKR. POLE/AMPS	BRANCH CIRCUIT AMPS	KVA LOAD
FM 359 AT FULSHEAR GASTON RD	PROPOSED ELECTRICAL	ELEC SERV TY D(120/240) 060 (NS)SS(E)SP(O)	1-1/2"	3/#6	N/A	2P/60	30	100	TRAFFIC SIGNAL	1P/50	40	6.2
									ILLUMINATION	2P/20	6	

Fulshear Gaston Rd

D3-1(3) 8In (Principal legend with descending strokes);
1.5" Radius, 0.6" Border, 0.4" Indent, White on Green;
"Fulshear Gaston", ClearviewHwy-3-W; "Rd", ClearviewHwy-3-W;

FM 359

D3-1(3) 8In (Principal legend with descending strokes);
1.5" Radius, 0.6" Border, 0.4" Indent, White on Green;
"FM 359", ClearviewHwy-3-W;

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

10/11/2024





FM 359 AND
FULSHEAR GASTON ROAD
PROPOSED SIGNAL
DETAILS

DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
LS				FM 359
DESIGNED				SHEET NO.
LS	STATE	DIST.	COUNTY	
CHECKED	TEXAS	HOUSTON	FORT BEND	
JG	CONT.	SECT.	JOB	
APPROVED				
SM				

PLOTDRIVER: PDF_2D_MON_MW_CR_300.plt PENTABLE: TXDOT-OR_MON_PENTABLE.TBL

DATE:10/11/2024 1:47:45 PM USER:cr4648
FILE:FA: \410008\41736\001\NCH\CADD\Sheet\SRCH\41736-1R-SPMK-01.dgn

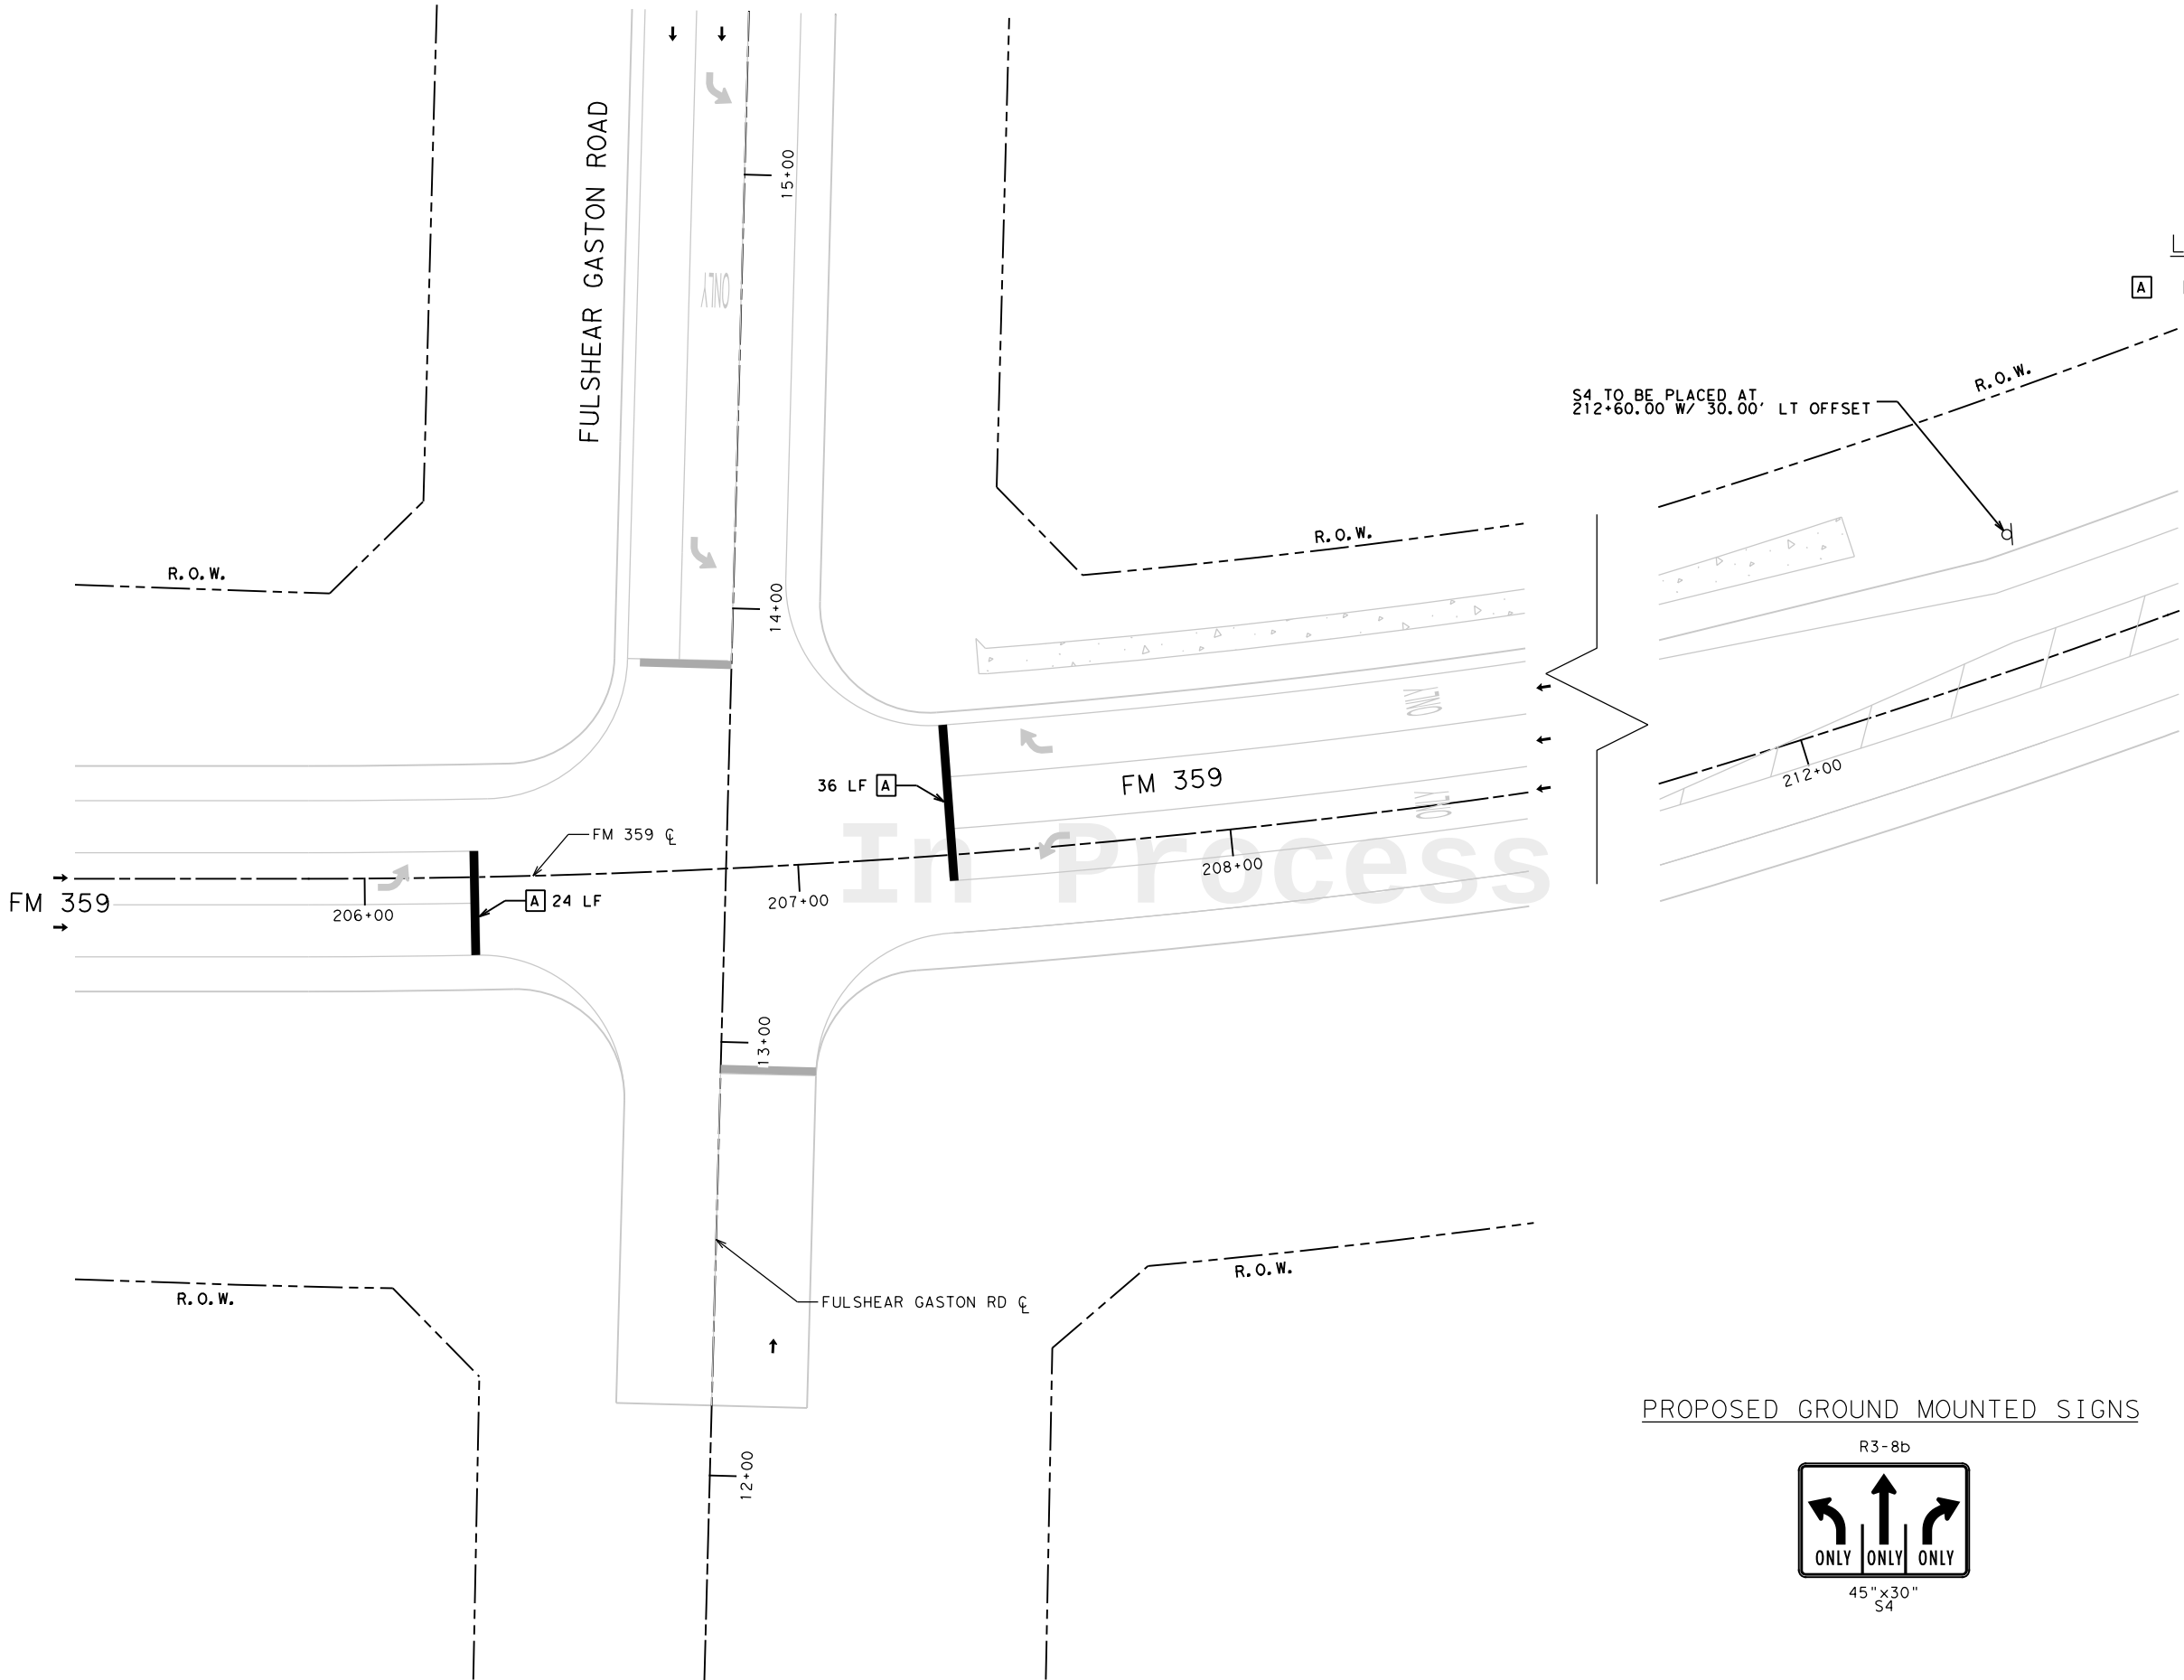

LEGEND
[A] RE PM TY II (W) 24" (SLD)

NOTES:
1. ROADWAY, UTILITIES AND R.O.W. PLANS HAVE BEEN PROVIDED BY FORT BEND COUNTY.

NO.	DATE	REVISION	APPROVED



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:
Stephen Moore 10/11/2024

halff 14800 ST. MARY'S LANE,
SUITE 160
HOUSTON, TEXAS 77079-2943
TEL (713) 588-2450
TBPELS FIRM NO. F-312



FM 359 AND
FULSHEAR GASTON ROAD
PROPOSED STRIPING, PAVEMENT
MARKINGS AND SIGNING

DRAWN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
LS			FM 359
DESIGNED			SHEET NO.
LS	STATE	DIST.	COUNTY
CHECKED	TEXAS	HOUSTON	FORT BEND
JG	CONT.	SECT.	JOB
APPROVED			
SM			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12



Texas Department of Transportation

Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION
GENERAL NOTES
AND REQUIREMENTS


BC (1) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS									
4-03	7-13								
9-07	8-14								
5-10	5-21								
		DIST		COUNTY				SHEET NO.	
								10	

95


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TYPICAL LOCATION OF CROSSROAD SIGNS

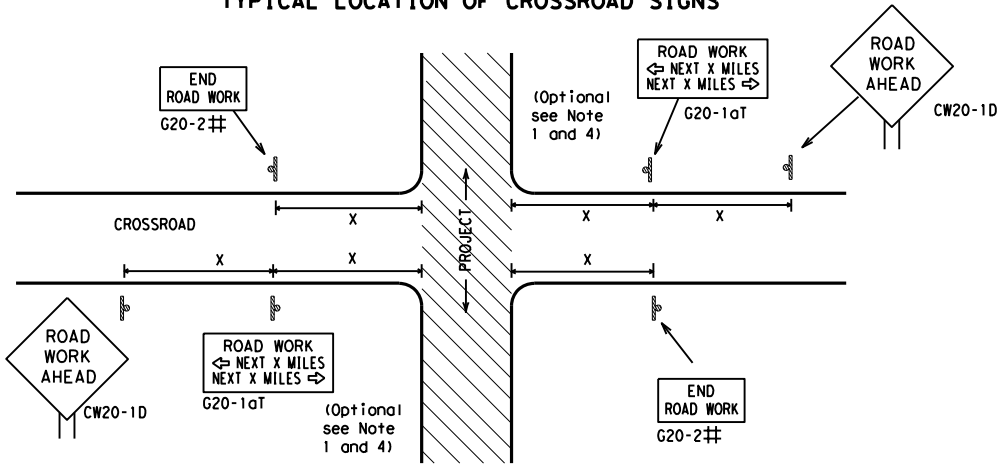

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

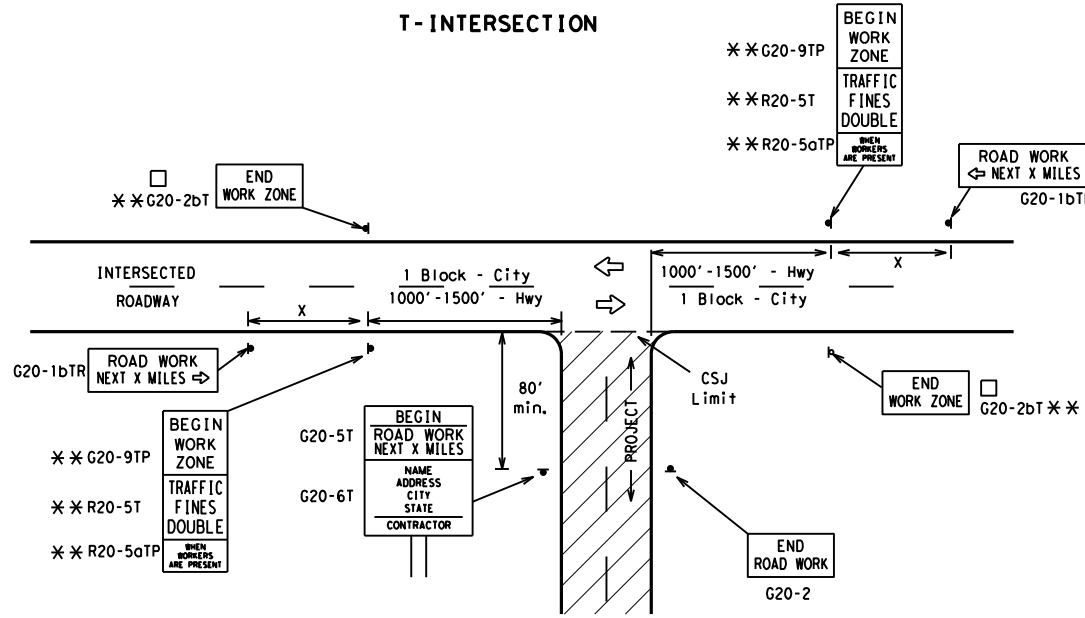

CSJ LIMITS AT T-INTERSECTION

1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
*			80	1000 ²
			*	*


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

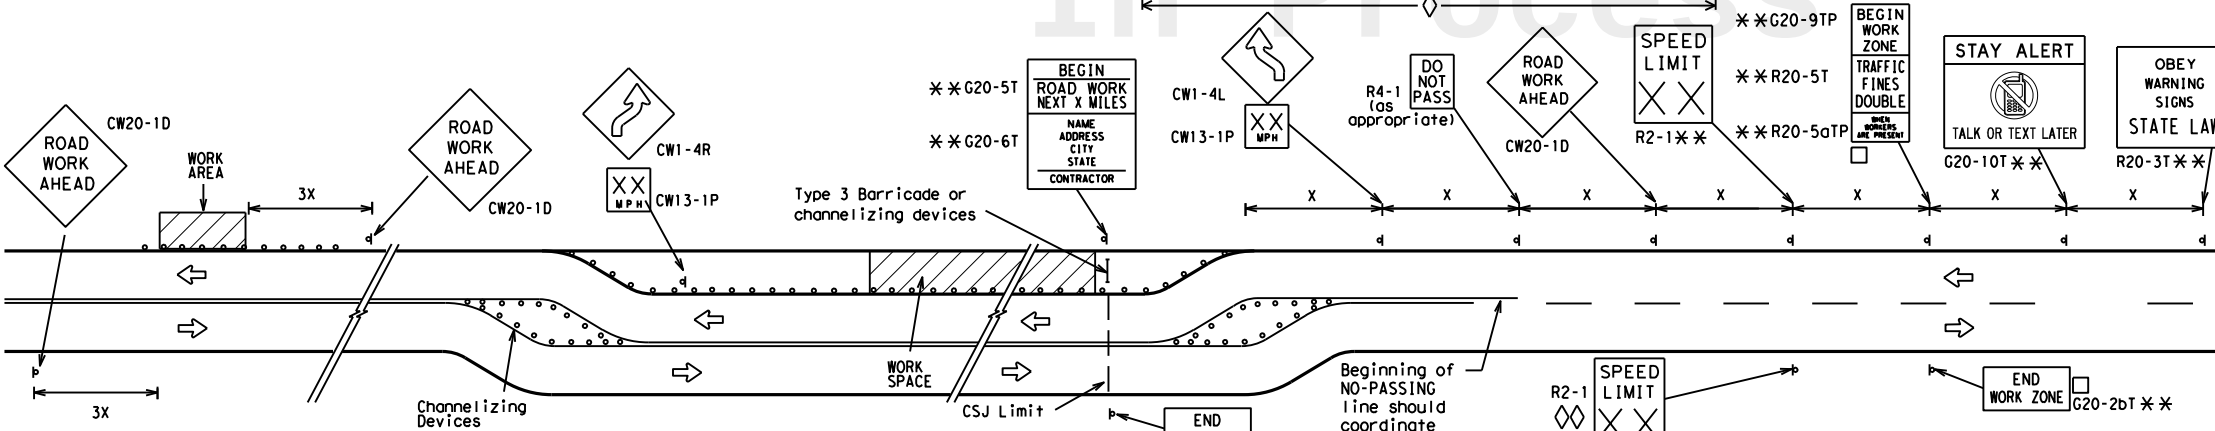

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

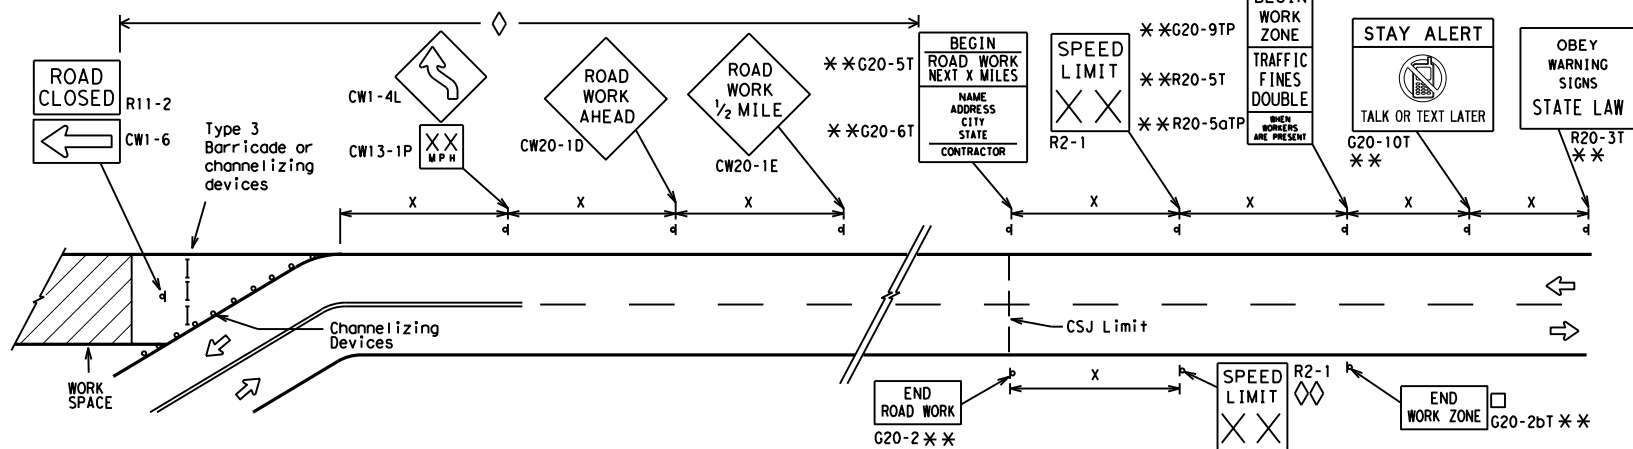

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- ☐ The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- ** CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- $\diamond$ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- $\diamond\diamond$ Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
	Type 3 Barricade
	Channelizing Devices
	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12

BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC (2) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS				
9-07 8-14				
7-13 5-21				
	DIST	COUNTY		SHEET NO.
				11


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

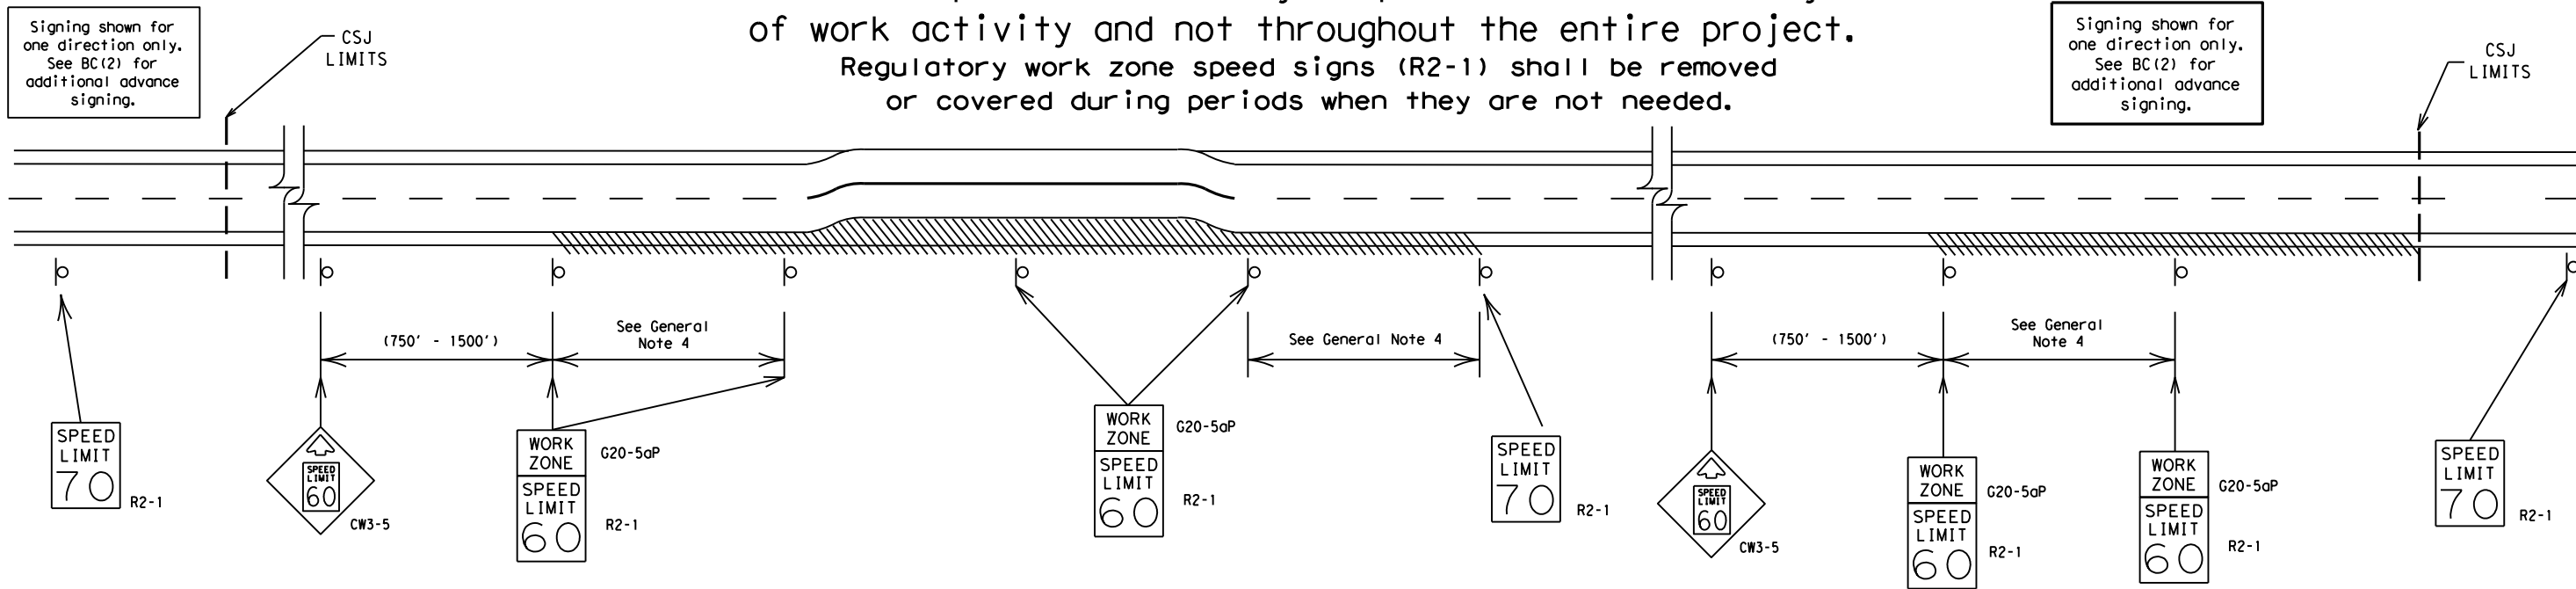

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES


- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - A. Law enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
 - E. Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

SHEET 3 OF 12

		Traffic Safety Division Standard	
BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT			
BC(3) - 21			
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT November 2002	CONT	SECT	JOB
REVISIONS		HIGHWAY	
9-07 8-14	DIST	COUNTY	SHEET NO.
7-13 5-21			12

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

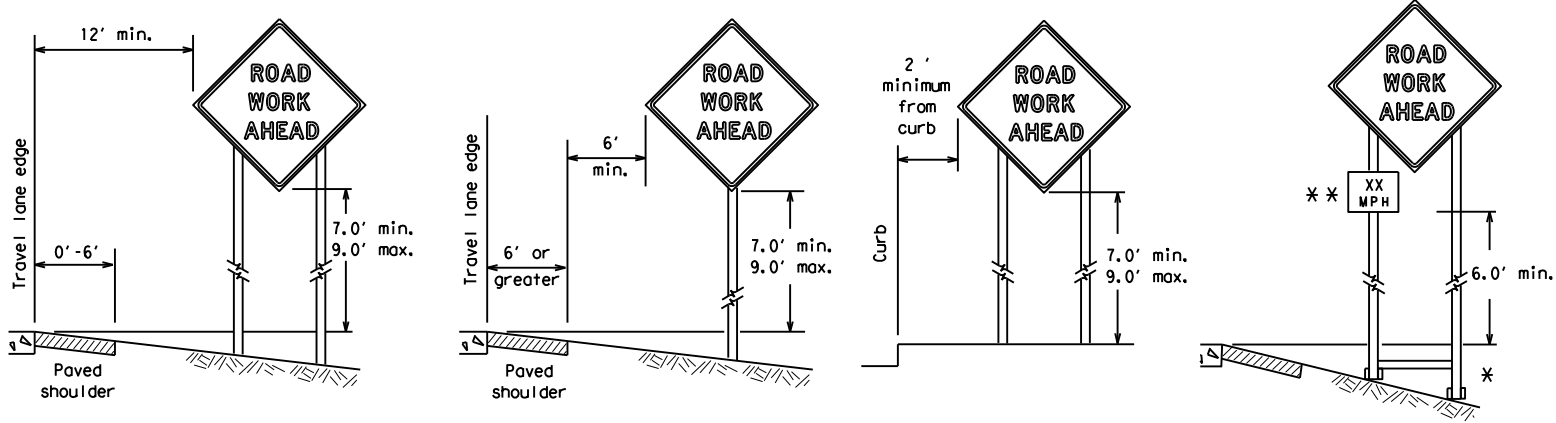

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.


ATTACHMENT FOR SIGN SUPPORTS

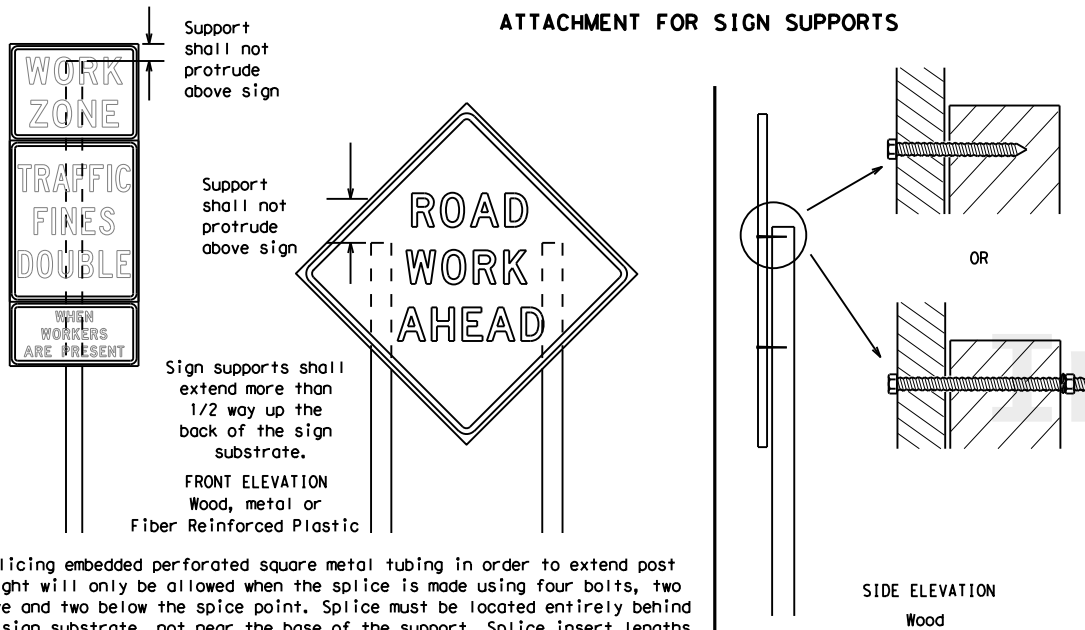

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectORIZED when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

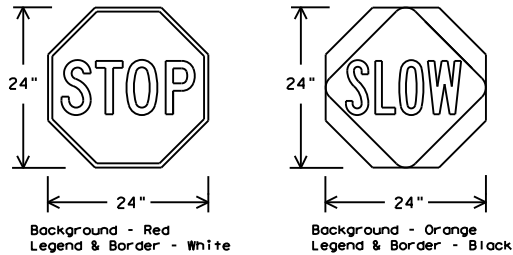

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS


1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS


1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12




		Traffic Safety Division Standard	
BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES			
BC (4) -21			
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT November 2002	CONT	SECT	JOB
REVISIONS		HIGHWAY	
9-07 8-14	DIST		COUNTY
7-13 5-21	SHEET NO.		13

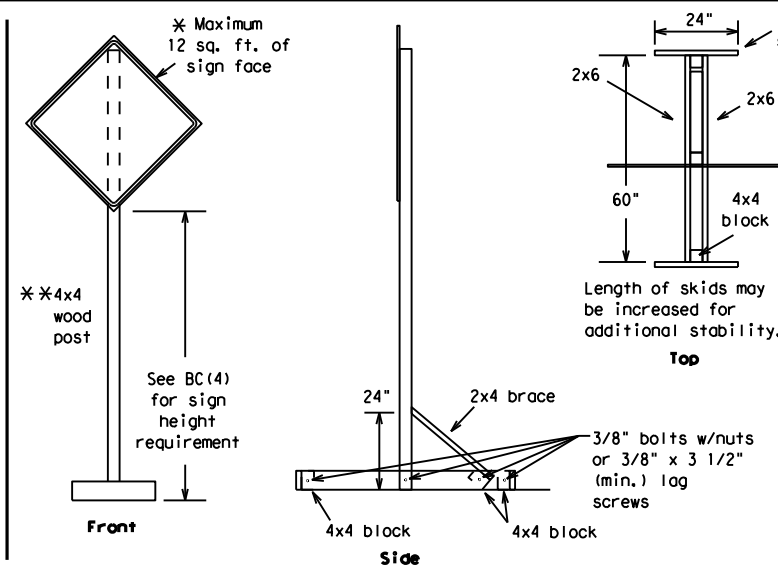

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

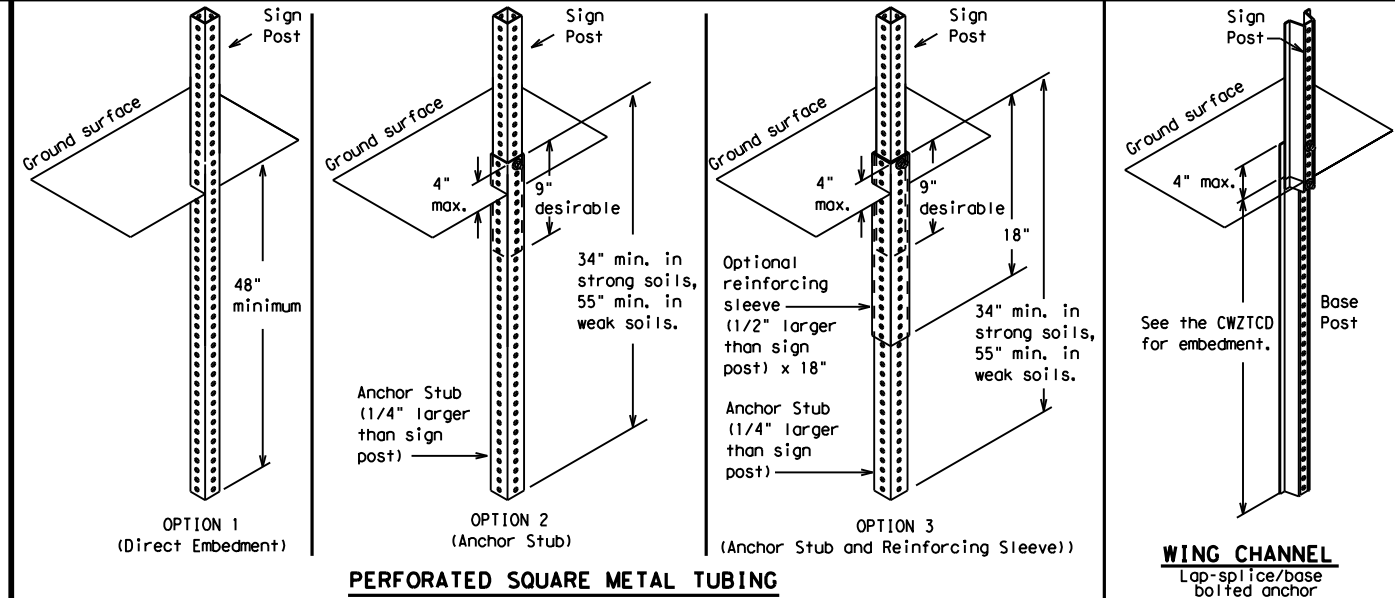

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support.
The maximum sign square footage shall adhere to the manufacturer's recommendation.
Two post installations can be used for larger signs.

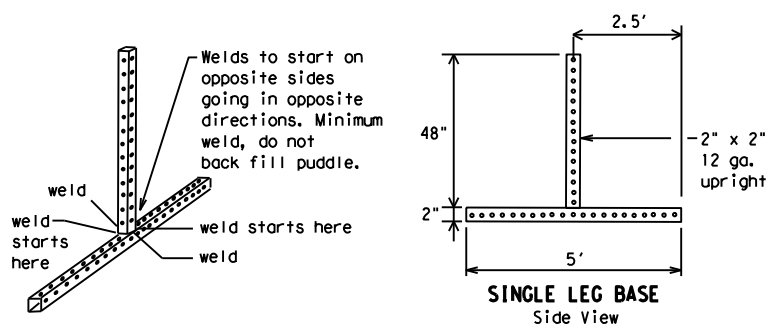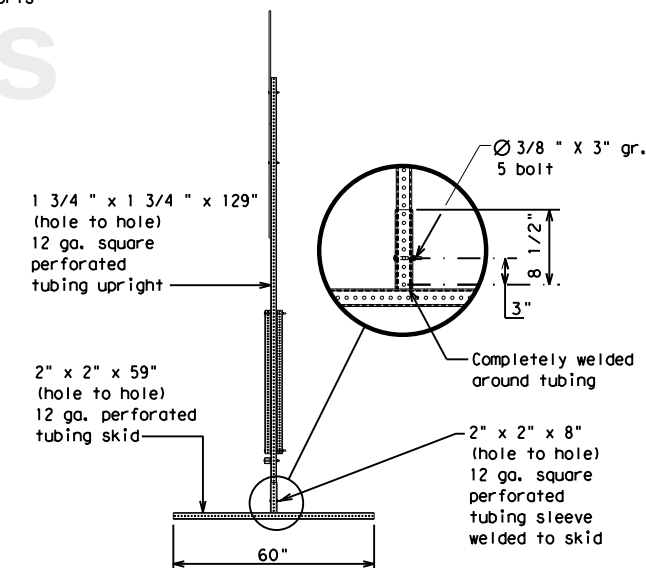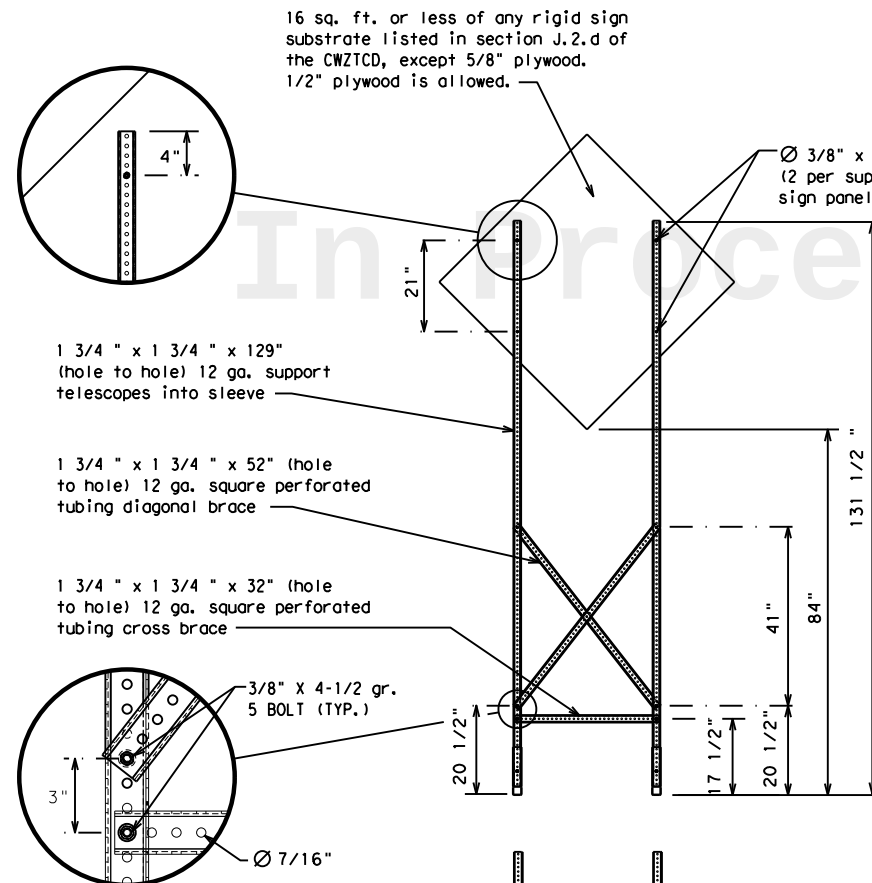

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

MORE DETAILS OF APPROVED LONG/INTERMEDIATE
AND SHORT TERM SUPPORTS CAN BE FOUND ON THE
CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



Texas Department of Transportation

**Traffic
Safety
Division
Standard**

BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC (5) - 21

FILE: bc-21.dgn		DN: TxDOT		CK: TxDOT		DW: TxDOT		CK: TxDOT	
© TxDOT November 2002 REVISIONS		CONT	SECT	JOB			HIGHWAY		
9-07	8-14	DIST		COUNTY				SHEET NO.	
7-13	5-21							14	

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY
CLOSED
X MILE

ROAD
CLOSED
AT SH XXX

ROAD
CLSD AT
FM XXXX

RIGHT X
LANES
CLOSED

CENTER
LANE
CLOSED

NIGHT
LANE
CLOSURES

VARIOUS
LANES
CLOSED

EXIT
CLOSED

MALL
DRIVEWAY
CLOSED

XXXXXXXX
BLVD
CLOSED

FRONTAGE
ROAD
CLOSED

SHOULDER
CLOSED
XXX FT

RIGHT LN
CLOSED
XXX FT

RIGHT X
LANES
OPEN

DAYTIME
LANE
CLOSURES

I-XX SOUTH
EXIT
CLOSED

EXIT XXX
CLOSED
X MILE

RIGHT LN
TO BE
CLOSED

X LANES
CLOSED
TUE - FRI

Other Condition List

ROADWORK
XXX FT

FLAGGER
XXXX FT

RIGHT LN
NARROWS
XXXX FT

MERGING
TRAFFIC
XXXX FT

LOOSE
GRAVEL
XXXX FT

DETOUR
X MILE

ROADWORK
PAST
SH XXXX

BUMP
XXXX FT

TRAFFIC
SIGNAL
XXXX FT

ROAD
REPAIRS
XXXX FT

LANE
NARROWS
XXXX FT

TWO-WAY
TRAFFIC
XX MILE

CONST
TRAFFIC
XXX FT

UNEVEN
LANES
XXXX FT

ROUGH
ROAD
XXXX FT

ROADWORK
NEXT
FRI-SUN

US XXX
EXIT
X MILES

LANES
SHIFT

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel
List

MERGE
RIGHT

DETOUR
NEXT
X EXITS

USE
EXIT XXX

STAY ON
US XXX
SOUTH

TRUCKS
USE
US XXX N

WATCH
FOR
TRUCKS

EXPECT
DELAYS

REDUCE
SPEED
XXX FT

USE
OTHER
ROUTES

STAY
IN
LANE

FORM
X LINES
RIGHT

USE
XXXXX
RD EXIT

USE EXIT
I-XX
NORTH

USE
I-XX E
TO I-XX N

WATCH
FOR
TRUCKS

EXPECT
DELAYS

PREPARE
TO
STOP

END
SHOULDER
USE

WATCH
FOR
WORKERS

Location
List

AT
FM XXXX

BEFORE
RAILROAD
CROSSING

NEXT
X
MILES

PAST
US XXX
EXIT

XXXXXXXX
TO
XXXXXXXX

US XXX
TO
FM XXXX

Warning
List

SPEED
LIMIT
XX MPH

MAXIMUM
SPEED
XX MPH

MINIMUM
SPEED
XX MPH

ADVISORY
SPEED
XX MPH

RIGHT
LANE
EXIT

USE
CAUTION

DRIVE
SAFELY

DRIVE
WITH
CARE

** Advance
Notice List

TUE-FRI
XX AM-
X PM

APR XX-
XX
X PM-X AM

BEGINS
MONDAY

BEGINS
MAY XX

MAY X-X
XX PM -
XX AM

NEXT
FRI-SUN

XX AM
TO
XX PM

NEXT
TUE
AUG XX

TONIGHT
XX PM-
XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD
Alternate	ALT
Avenue	AVE
Best Route	BEST RTE
Boulevard	BLVD
Bridge	BRDG
Cannot	CANT
Center	CTR
Construction Ahead	CONST AHD
CROSSING	XING
Detour Route	DETOUR RTE
Do Not	DONT
East	E
Eastbound	(route) E
Emergency	EMER
Emergency Vehicle	EMER VEH
Entrance, Enter	ENT
Express Lane	EXP LN
Expressway	EXPWY
XXXX Feet	XXXX FT
Fog Ahead	FOG AHD
Freeway	FRWY, FWY
Freeway Blocked	FWY BLKD
Friday	FRI
Hazardous Driving	HAZ DRIVING
Hazardous Material	HAZMAT
High-Occupancy	HOV
Vehicle	HWY
Highway	HR, HRS
Hour(s)	HR, HRS
Information	INFO
It Is	ITS
Junction	JCT
Left	LFT
Left Lane	LFT LN
Lane Closed	LN CLOSED
Lower Level	LWR LEVEL
Maintenance	MAINT

Roadway designation # IH-number, US-number, SH-number, FM-number

WORD OR PHRASE	ABBREVIATION
Major	MAJ
Miles	MI
Miles Per Hour	MPH
Minor	MNR
Monday	MON
Normal	NORM
North	N
Northbound	(route) N
Parking	PKING
Road	RD
Right Lane	RT LN
Saturday	SAT
Service Road	SERV RD
Shoulder	SHLDR
Slippery	SLIP
South	S
Southbound	(route) S
Speed	SPD
Street	ST
Sunday	SUN
Telephone	PHONE
Temporary	TEMP
Thursday	THURS
To Downtown	TO DWNTN
Traffic	TRAF
Travelers	TRVLRS
Tuesday	TUES
Time Minutes	TIME MIN
Upper Level	UPR LEVEL
Vehicles (s)	VEH, VEHS
Warning	WARN
Wednesday	WED
Weight Limit	WT LIMIT
West	W
Westbound	(route) W
Wet Pavement	WET PVMT
Will Not	WONT

SHEET 6 OF 12



Texas Department of Transportation

Traffic
Safety
Division
Standard


BARRICADE AND CONSTRUCTION
PORTABLE CHANGEABLE
MESSAGE SIGN (PCMS)

BC (6) -21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB			HIGHWAY		
REVISIONS									
9-07	8-14	DIST		COUNTY				SHEET NO.	
7-13	5-21							15	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

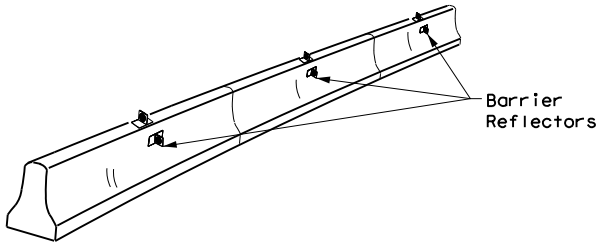


CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

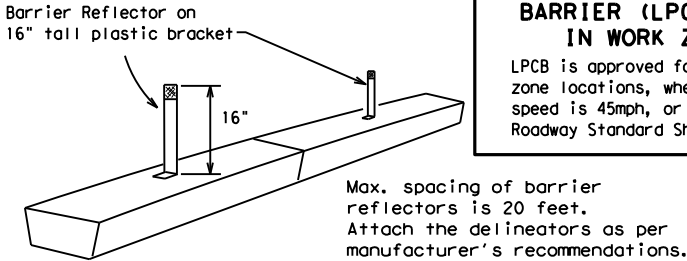

LOW PROFILE CONCRETE BARRIER (LPCB)

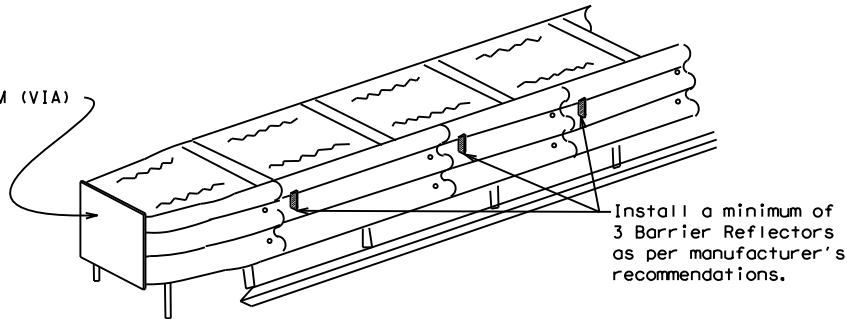


DELINEATION OF END TREATMENTS


END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

WARNING LIGHTS

- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS


- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

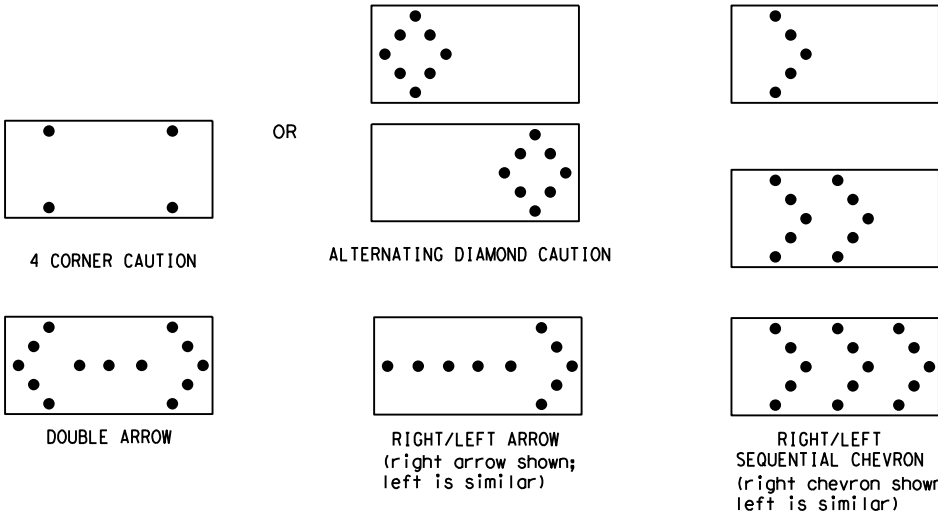

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) -21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB			HIGHWAY		
REVISIONS									
9-07	8-14	DIST		COUNTY				SHEET NO.	
7-13	5-21								
								16	

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:



- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.



BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

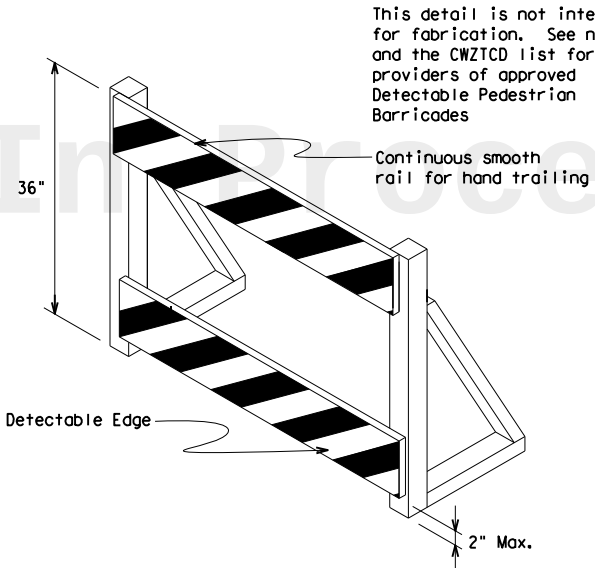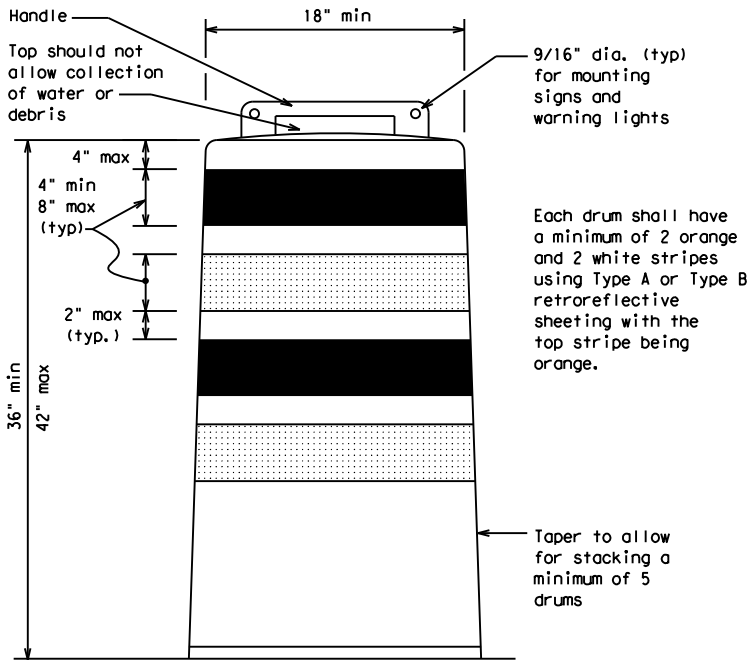


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CWI-8, Opposing Traffic Lane
Divider, Driveway sign D70a, Keep Right
R4 series or other signs as approved
by Engineer



12" x 24"
Vertical Panel
mount with diagonals
sloping down towards
travel way

Plywood, Aluminum or Metal sign
substrates shall NOT be used on
plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED
ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12



Texas Department of Transportation



Traffic
Safety
Division
Standard

BARRICADE AND CONSTRUCTION
CHANNELIZING DEVICES

BC(8) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT November 2002		CONT	SECT	JOB			HIGHWAY		
REVISIONS									
4-03	8-14								
9-07	5-21	DIST		COUNTY			SHEET NO.		
7-13							17		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

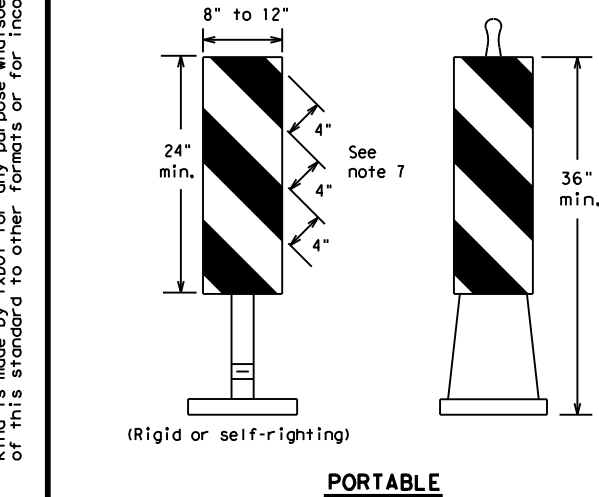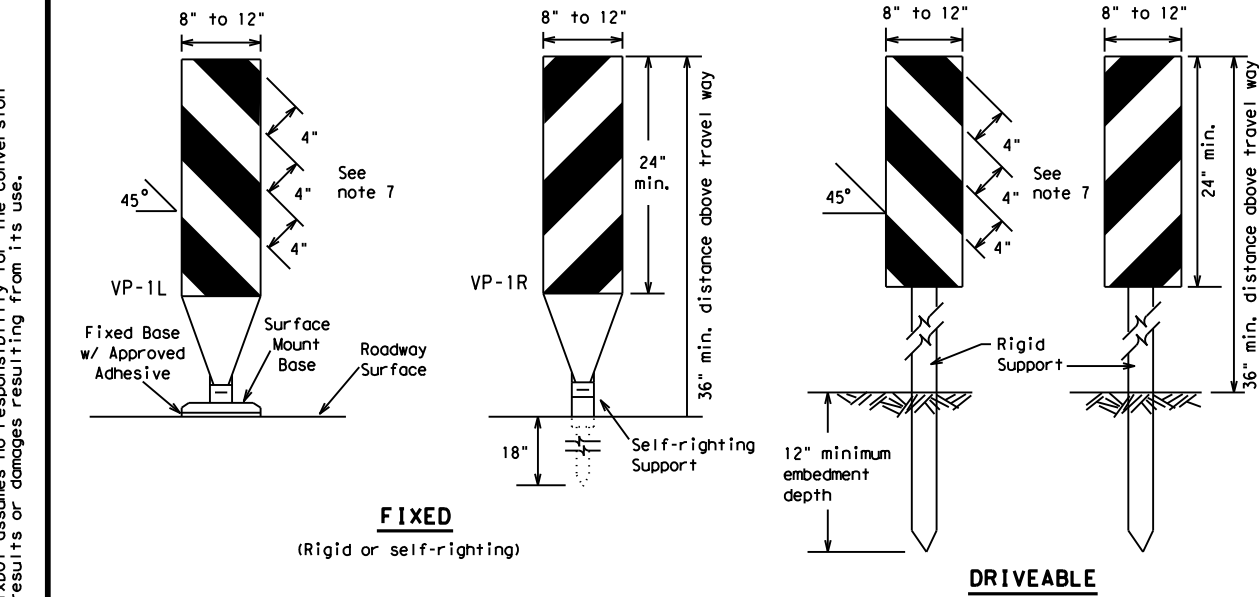


1. Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
2. VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
4. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
5. Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
6. Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
7. Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

VERTICAL PANELS (VPs)

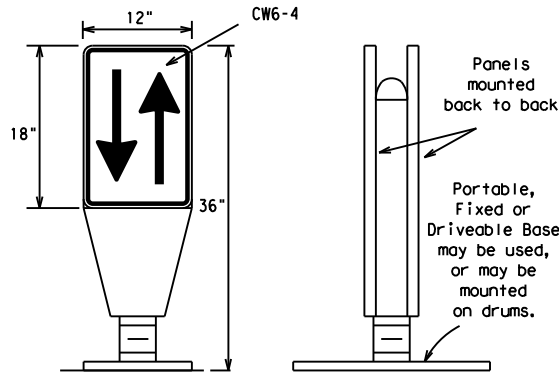


1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
2. The OTLD may be used in combination with 42" cones or VPs.
3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
4. The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

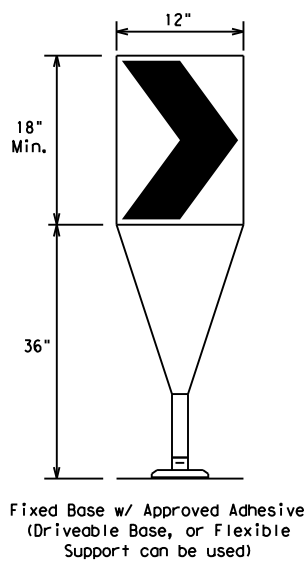

1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
3. Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
4. To be effective, the chevron should be visible for at least 500 feet.
5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



LONGITUDINAL CHANNELIZING DEVICES (LCD)

1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
2. LCDs may be used instead of a line of cones or drums.
3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

1. Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
2. Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
5. When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
6. Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

**Taper lengths have been rounded off.
L=Length of Taper (FT.) W=Width of Offset (FT.)
S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB			HIGHWAY		
REVISIONS									
		DIST		COUNTY				SHEET NO.	
								18	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

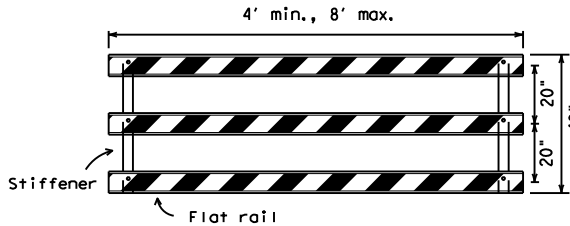

Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES


Each roadway of a divided highway shall be barricaded in the same manner.

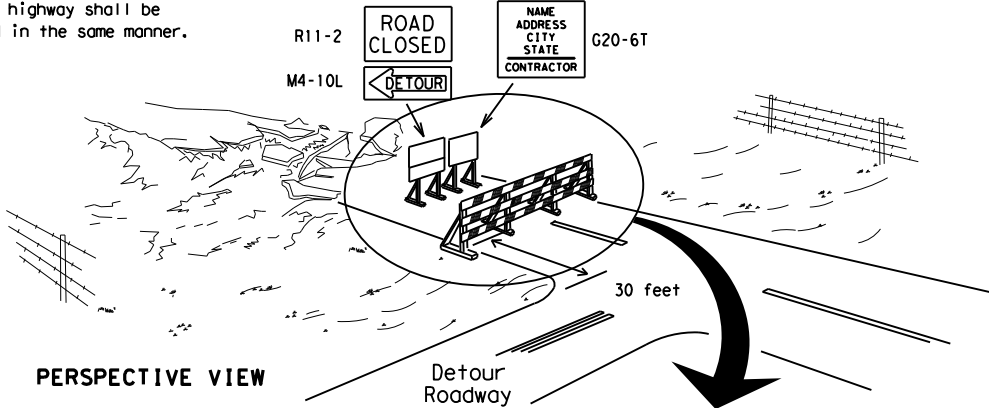

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

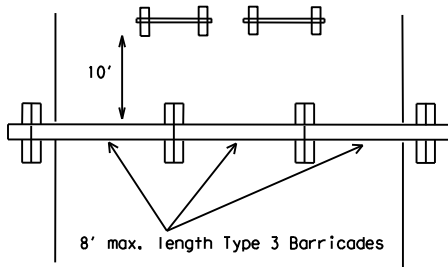


PLAN VIEW


TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

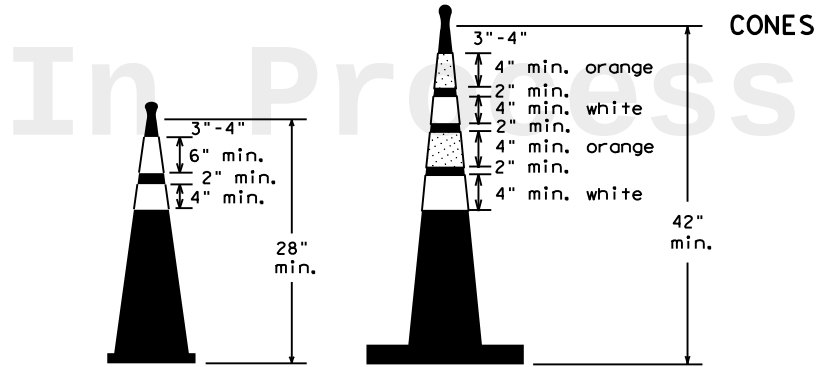

Two-Piece cones




One-Piece cones




Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.

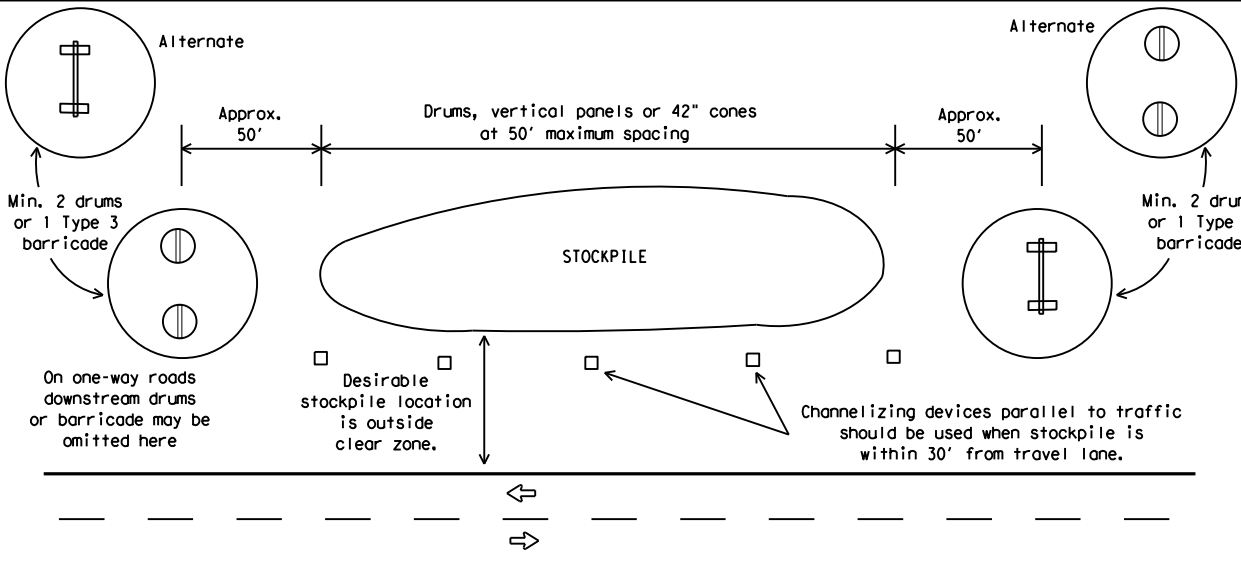


TRAFFIC CONTROL FOR MATERIAL STOCKPILES

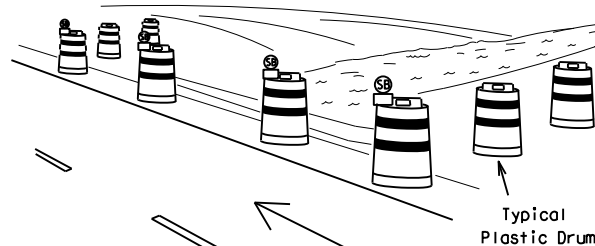

PERSPECTIVE VIEW

These drums are not required on one-way roadway

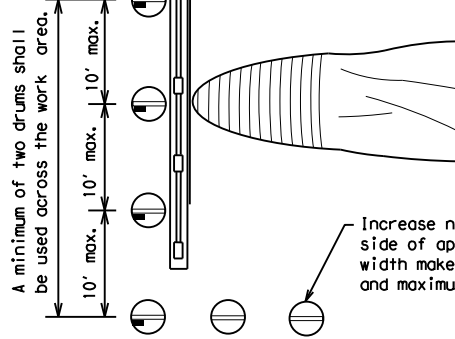

PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND

	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

SHEET 10 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS				
9-07 8-14				
7-13 5-21				
	DIST	COUNTY		SHEET NO.
				19

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

WORK ZONE PAVEMENT MARKINGS

GENERAL

1. The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
2. Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
3. Additional supplemental pavement marking details may be found in the plans or specifications.
4. Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
7. All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

1. Raised pavement markers are to be placed according to the patterns on BC(12).
2. All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

1. Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
2. Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

1. The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
2. Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
4. Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

1. Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
2. The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
3. Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
5. Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
7. Over-painting of the markings SHALL NOT BE permitted.
8. Removal of raised pavement markers shall be as directed by the Engineer.
9. Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
10. Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective
Roadway Marker Tabs

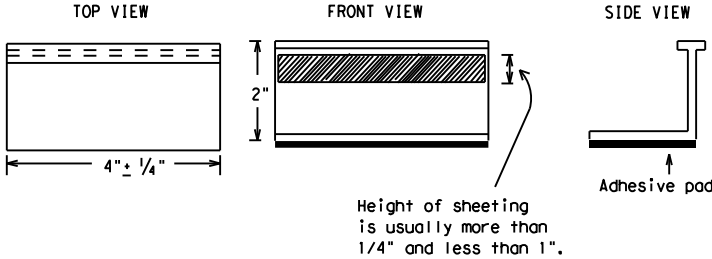

STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE

1. Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
2. Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
3. Small design variances may be noted between tab manufacturers.
4. See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

1. Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
2. All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
3. Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
YELLOW - (two amber reflective surfaces with yellow body).
WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).


SHEET 11 OF 12

 Texas Department of Transportation			Traffic Safety Division Standard		
BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS					
BC (11) - 21					
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY	
REVISIONS					
2-98 9-07 5-21					
1-02 7-13					
11-02 8-14					
	DIST		COUNTRY		SHEET NO.
					20


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

PAVEMENT MARKING PATTERNS




REFLECTORIZED PAVEMENT MARKINGS - PATTERN A



REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

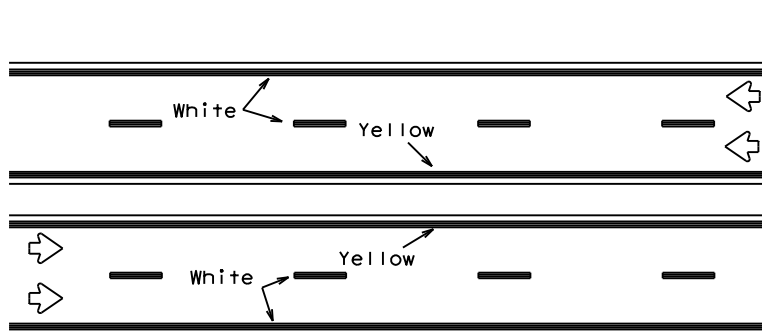

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.


EDGE & LANE LINES FOR DIVIDED HIGHWAY

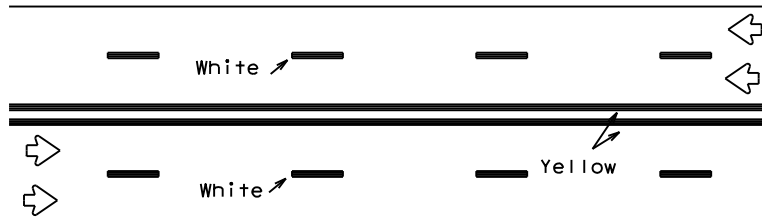

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

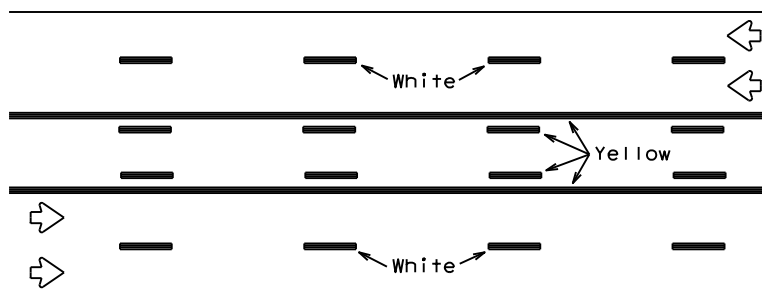


REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.


TWO-WAY LEFT TURN LANE




RAISED PAVEMENT MARKERS - PATTERN A




RAISED PAVEMENT MARKERS - PATTERN B

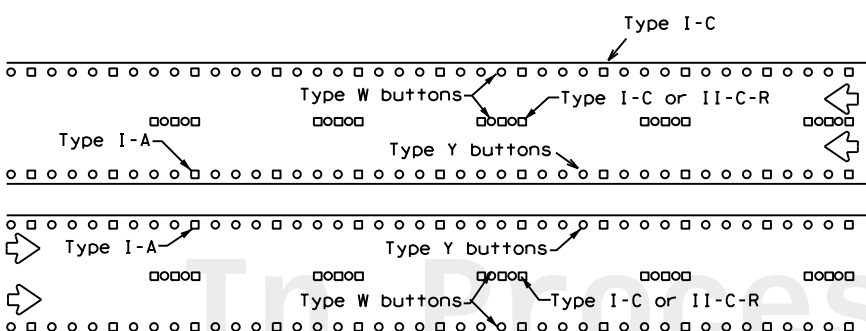

RAISED PAVEMENT MARKERS

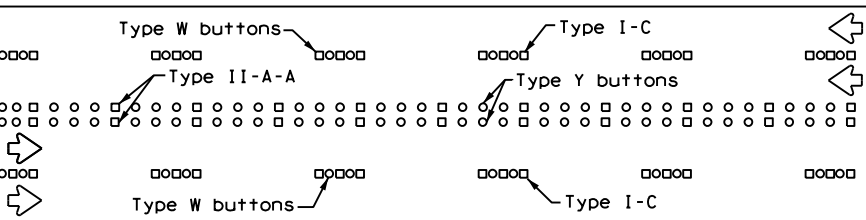


RAISED PAVEMENT MARKERS



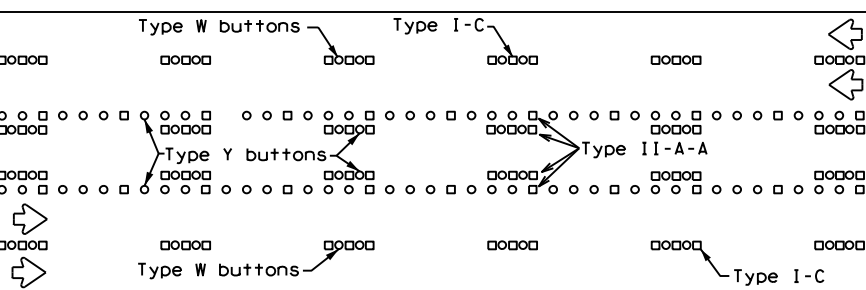


RAISED PAVEMENT MARKERS


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

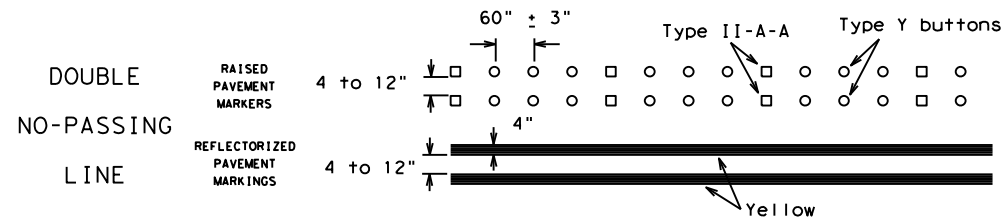

SOLID LINES

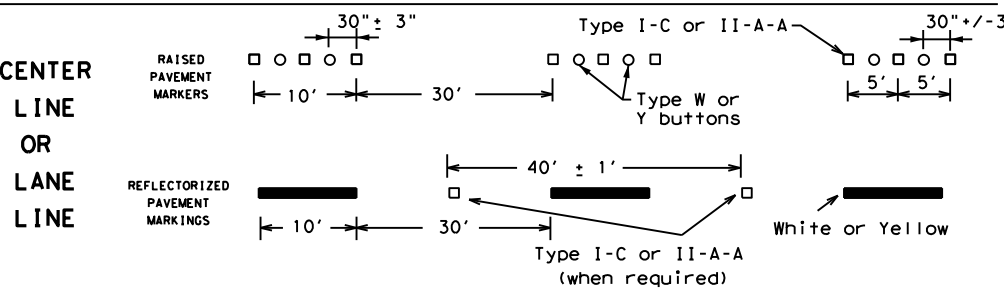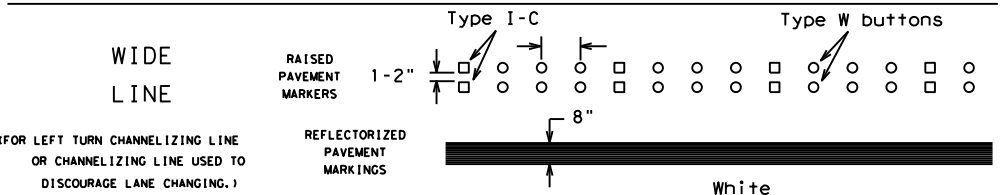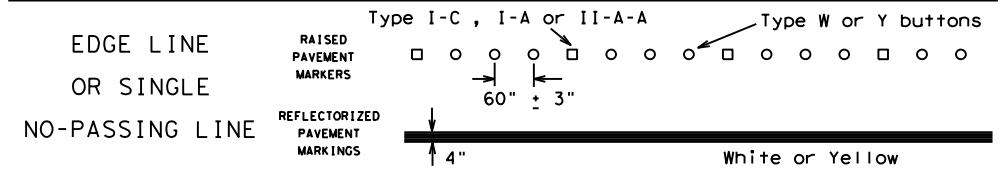


BROKEN LINES

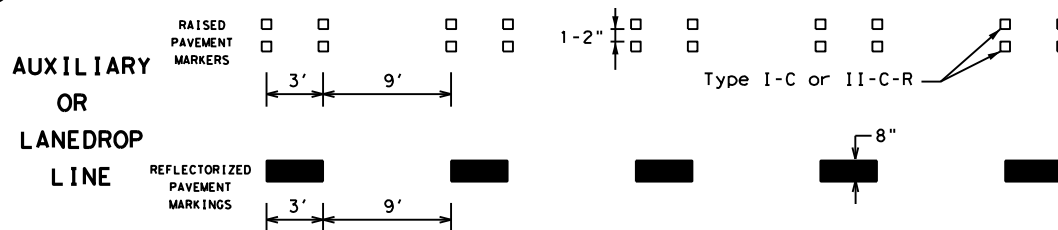

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

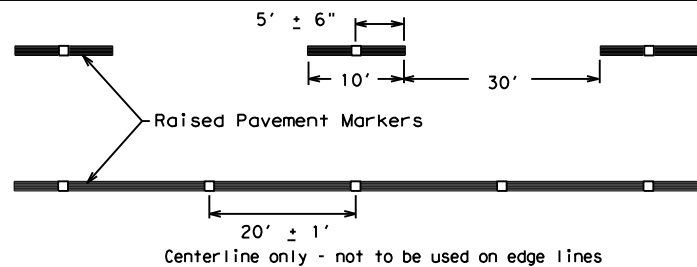

SHEET 12 OF 12




BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS


BC(12)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS				
1-97 9-07 5-21				
2-98 7-13				
11-02 8-14				
	DIST	COUNTY		SHEET NO.
				21


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

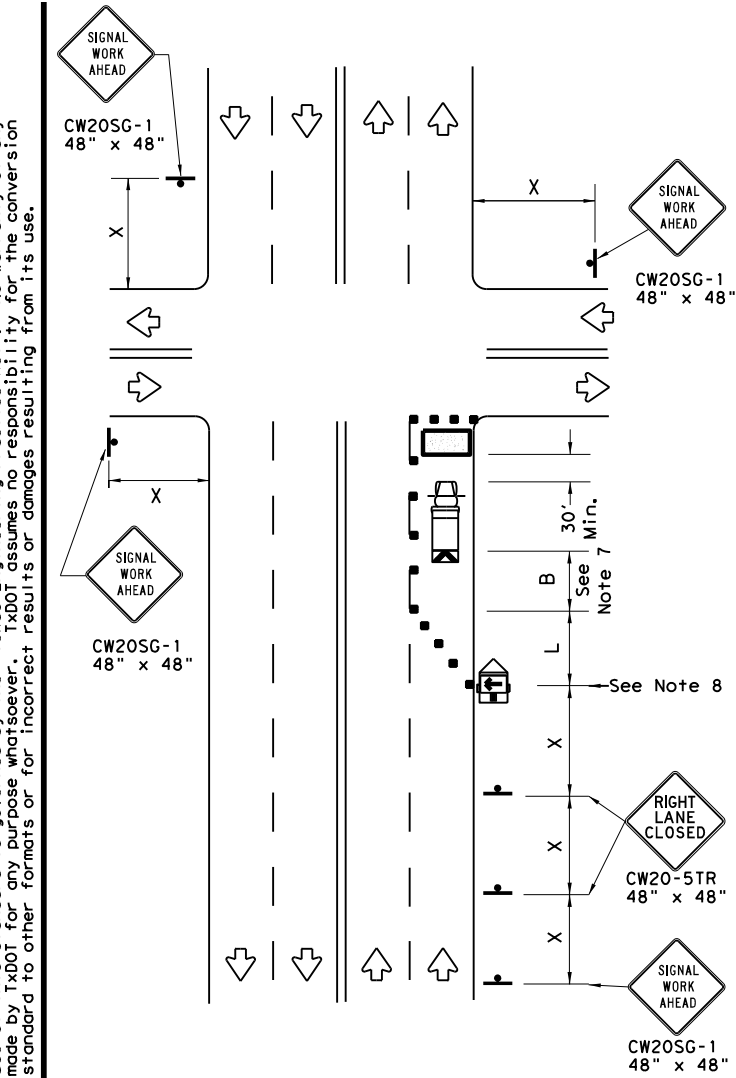

NEAR SIDE LANE CLOSURE
SHORT DURATION OR SHORT TERM STATIONARY

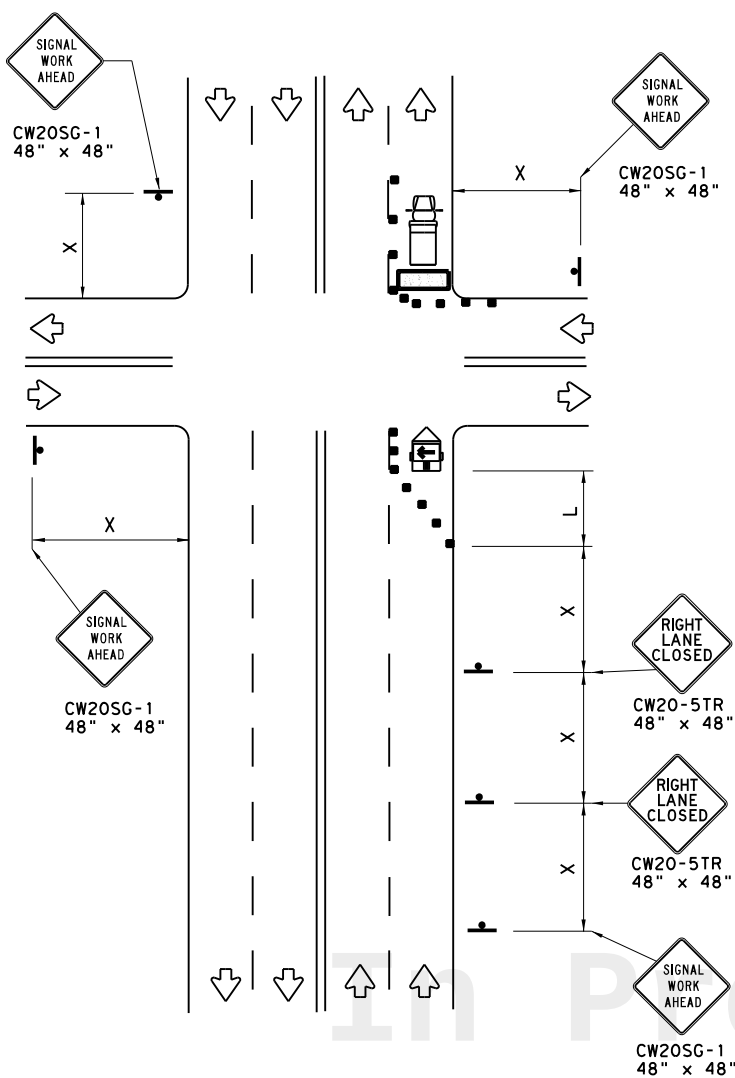

FAR SIDE RIGHT LANE CLOSURE
SHORT DURATION OR SHORT TERM STATIONARY

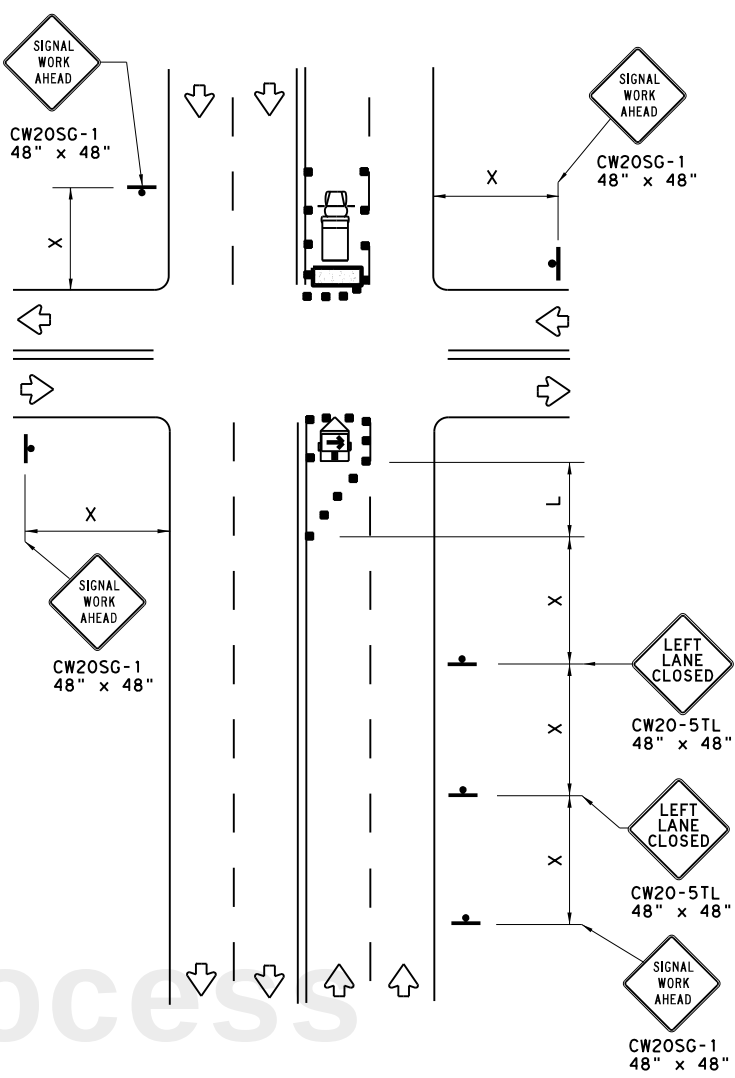


FAR SIDE LEFT LANE CLOSURE
SHORT DURATION OR SHORT TERM STATIONARY

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger


Posted Speed *	Formula	Minimum Desirable Taper Lengths * X			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
** Taper lengths have been rounded off.
L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

WORKERS IN BUCKET TRUCKS SHALL NOT WORK ABOVE OPEN LANES OF TRAFFIC.

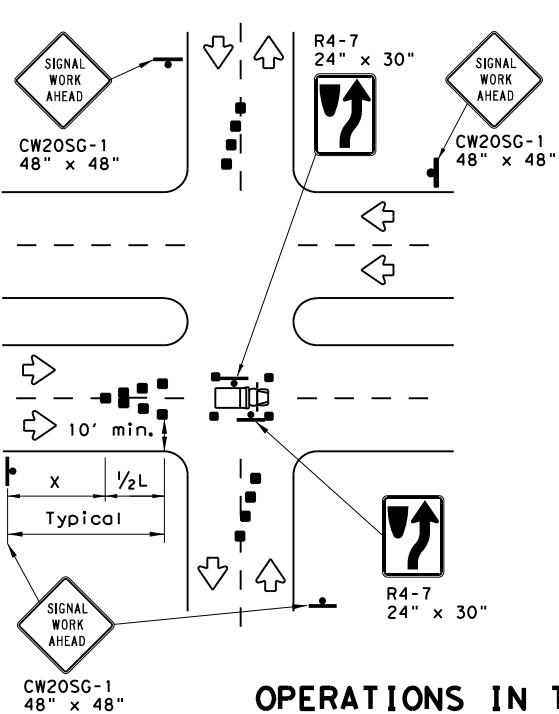

OPERATIONS IN THE INTERSECTION
SHORT DURATION

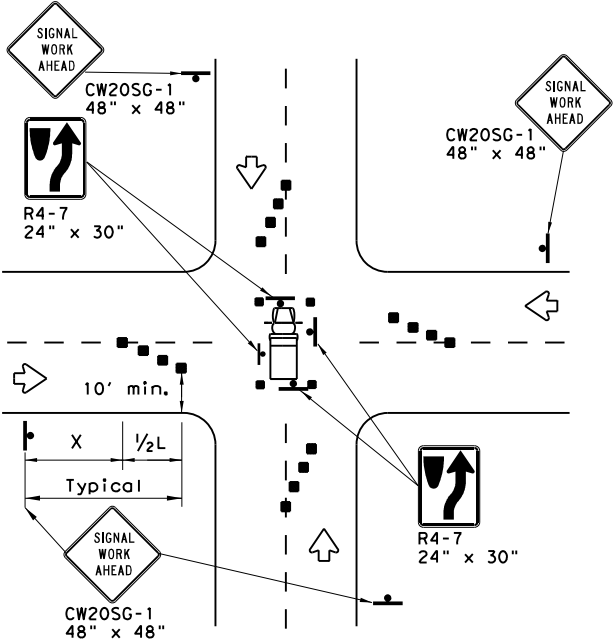

GENERAL NOTES

- The minimum size channelizing device is the 28" cone. 42" Two-piece cones, drums, vertical panels or barricades will be required when the device must be left unattended at night.
- Obstructions or hazards at the work area shall be clearly marked and delineated at all times.
- Flaggers and Flagger Symbol (CW20-7) signs may be required according to field conditions.
- Vehicles parked in roadway shall be equipped with at least two high intensity rotating, flashing, oscillating or strobe type lights.
- High level warning devices (flag trees) may be used at corners of the vehicle.
- When work operations are performed on existing signals, the signals may be placed in flashing red mode when approved by the engineer. If existing signals do not have power, All-Way Stop (R1-1 and R1-3P) signs may be implemented when approved by the engineer.
- For Short-Term Stationary work the buffer space "B" from the above table should be used if field conditions permit. For Short Duration (less than 1 hour) any buffer space provided will enhance the safety of the setup.
- The arrow board at this location may be omitted for Short Duration work if the work vehicle has an arrow board in operation. As an option, the arrow board may be placed at the end of the taper in the closed lane if space is not available at the beginning of the taper.
- Signs and devices for the NEAR SIDE LANE CLOSURE may be altered for a left lane closure by using a LEFT LANE CLOSED (CW20-5TL) and adding channelizing devices on the centerline to protect the work space from opposing traffic.

SHEET 1 OF 2

Texas Department of Transportation

Traffic Operations Division Standard


TRAFFIC SIGNAL WORK TYPICAL DETAILS

WZ(BTS-1)-13

FILE: wzbtts-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS				
2-98 10-99 7-13	DIST		COUNTY	SHEET NO.
4-98 3-03				22

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

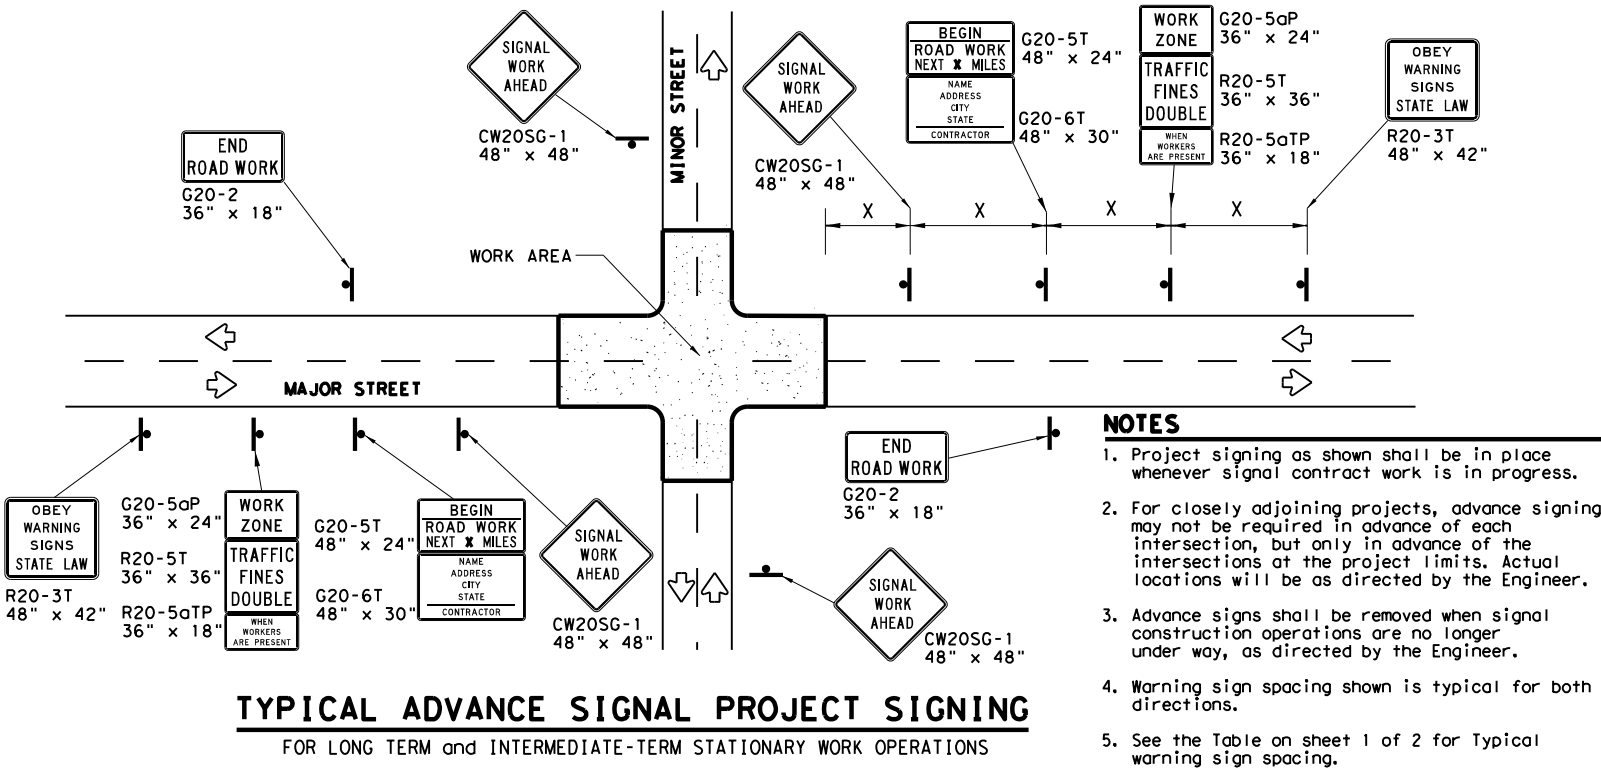

TYPICAL ADVANCE SIGNAL PROJECT SIGNING
FOR LONG TERM and INTERMEDIATE-TERM STATIONARY WORK OPERATIONS

GENERAL NOTES FOR WORK ZONE SIGNS

- Signs shall be installed and maintained in a straight and plumb condition.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- Nails shall NOT be used to attach signs to any support.
- All signs shall be installed in accordance with the plans or as directed by the Engineer.
- The Contractor shall furnish the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD).
- The Contractor shall furnish sign supports and substrates listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD), installed as per the manufacturer's recommendations.
- Temporary signs that have damaged or cracked substrates and/or damaged or marred reflective sheeting shall be replaced as directed by the Engineer.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1".
- Damaged wood posts shall be replaced. Splicing wood posts will not be allowed.

DURATION OF WORK

- Work zone durations are defined in Part 6, Section 6G.02 of the Texas Manual on Uniform Traffic Control Devices (TMUTCD).

SIGN MOUNTING HEIGHT

- Sign height of Long-term/Intermediate-term warning signs shall be as shown on Figure 6F-1 of the TMUTCD.
- Sign height of Short-term/Short Duration warning signs shall be as shown on Figure 6F-2 of the TMUTCD.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered, unless otherwise approved by the Engineer.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night without damaging the sign sheeting. Burlap, or heavy materials such as plywood or aluminum shall not be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes back filled upon completion of the work.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the requirements of the DMS and color usage table shown on this sheet.

SIGN SUPPORT WEIGHTS

- Weights used to keep signs from turning over should be sandbags filled with dry, cohesionless material.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects will not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber, such as tire inner tubes, shall not be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.


LEGEND	
	Sign
	Channelizing Devices
	Type 3 Barricade

DEPARTMENTAL MATERIAL SPECIFICATIONS

SIGN FACE MATERIALS	DMS-8300
FLEXIBLE ROLL-UP REFLECTIVE SIGNS	DMS-8310

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL} SHEETING
WHITE	BACKGROUND	TYPE A SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be found at the following web address:
http://www.txdot.gov/txdot_library/publications/construction.htm

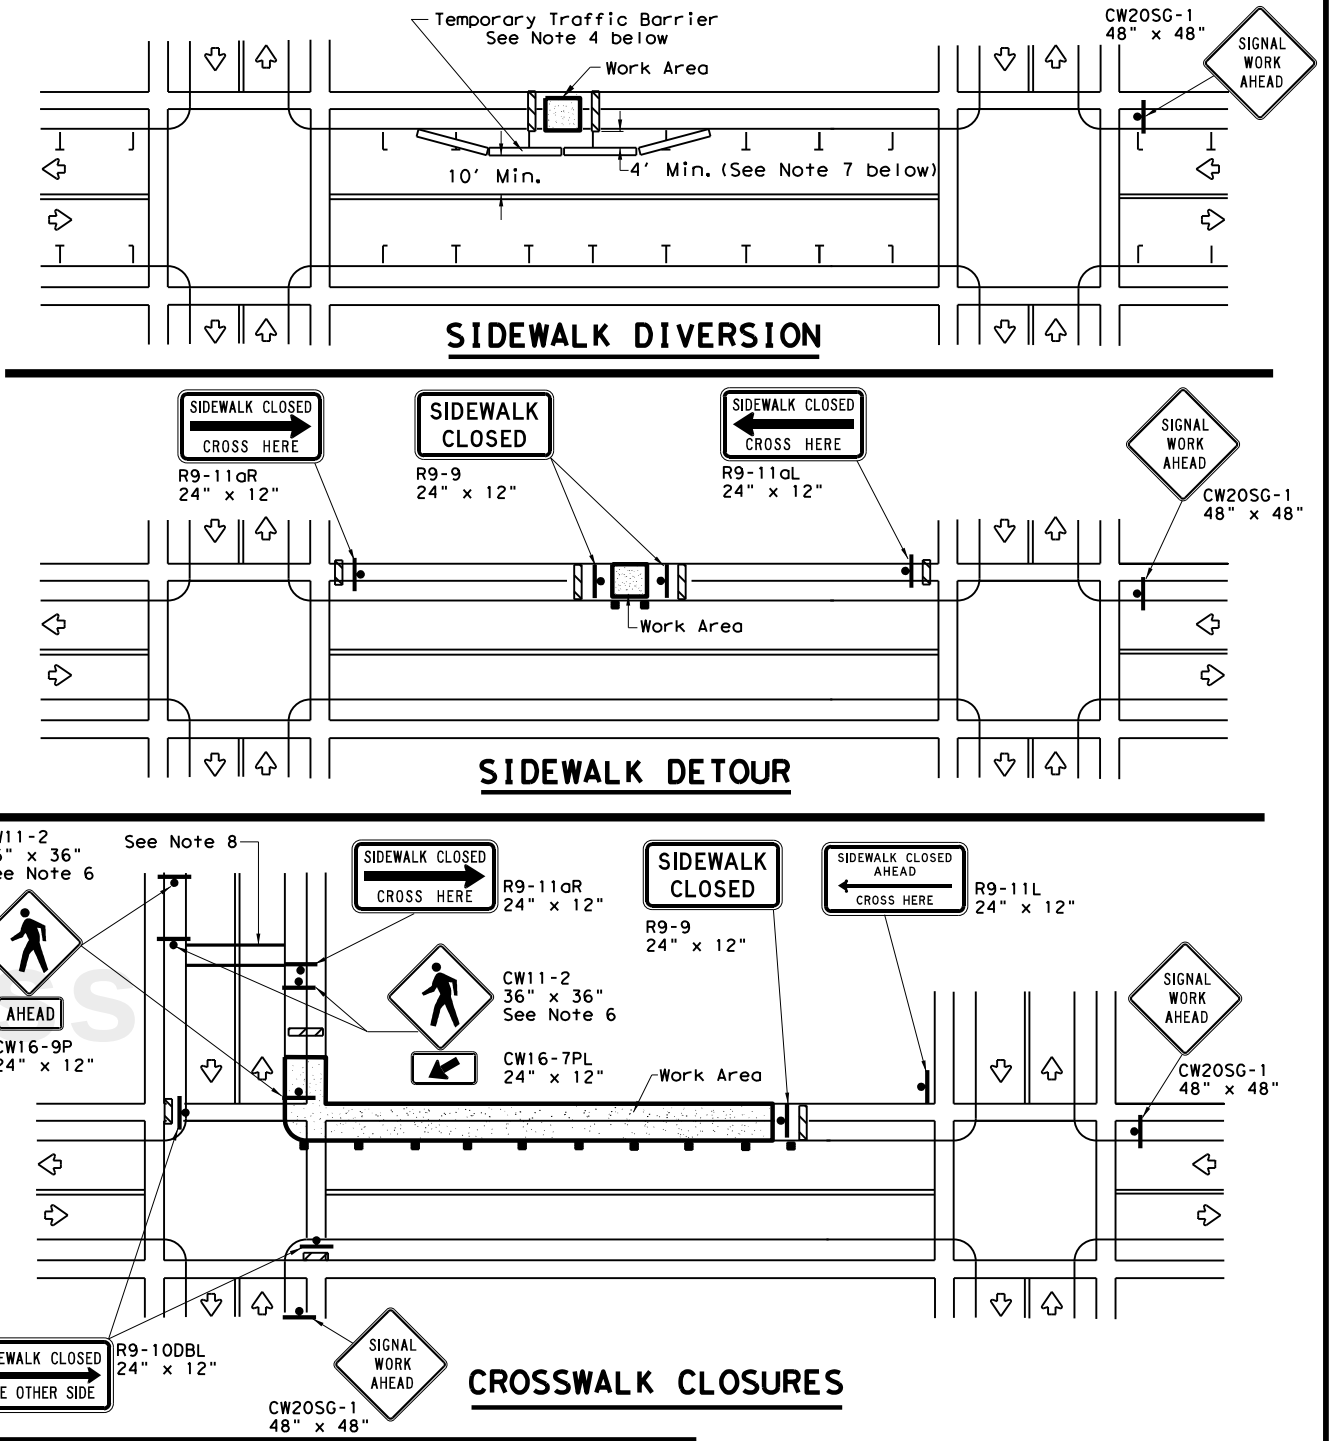

PEDESTRIAN CONTROL

- Holes, trenches or other hazards shall be adequately protected by covering, delineating or surrounding the hazard with orange plastic pedestrian fencing or longitudinal channelizing devices, or as directed by the Engineer.
- "CROSSWALK CLOSURES" as detailed above will require the Engineer's approval prior to installation.
- R9 series signs shown may be placed on supports detailed on the BC standards or CWZTCD list, or when fabricated from approved lightweight plastic substrates, they may be mounted on top of a plastic drum at or near the location shown.
- For speeds less than 45 mph longitudinal channelizing devices may be used instead of traffic barriers when approved by the Engineer. Attenuation of blunt ends and installation of water filled devices shall be as per BC(9) and manufacturer's recommendations.
- Location of devices are for general guidance. Actual device spacing and location must be field adjusted to meet actual conditions.
- Where pedestrians with visual disabilities normally use the closed sidewalk Detectable Pedestrian Barricades should be used instead of the Type 3 Barricades shown.
- The width of existing sidewalk should be maintained if practical.
- Pavement markings for mid-block crosswalks shall be paid for under the appropriate bid items.
- When crosswalks or other pedestrian facilities are closed or relocated, temporary facilities shall be detectable and shall include accessibility features consistent with the features present in the existing pedestrian facility.

SHEET 2 OF 2

Texas Department of Transportation

Traffic Operations Division Standard

TRAFFIC SIGNAL WORK BARRICADES AND SIGNS

WZ(BTS-2) - 13

FILE:	wzbtts-13.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	April 1992	CONT	SECT	JOB	HIGHWAY				
REVISIONS									
2-98	10-99	7-13	DIST		COUNTY	SHEET NO.			
4-98	3-03					23			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

GENERAL NOTES FOR ALL ELECTRICAL WORK

1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is 1/2 in. or less in diameter.
4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

CONDUIT

A. MATERIALS

1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.

AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" x 16" x 4"
#2	8" x 8" x 4"	10" x 10" x 4"	12" x 12" x 4"
#4	8" x 8" x 4"	10" x 10" x 4"	10" x 10" x 4"
#6	8" x 8" x 4"	8" x 8" x 4"	10" x 10" x 4"
#8	8" x 8" x 4"	8" x 8" x 4"	8" x 8" x 4"

4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.

8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plans. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the PVC conduit system. When galvanized steel RMC elbows are specifically called for in the plans and any portion of the RMC elbow is buried less than 18 in., ground the RMC elbow by means of a grounding bushing on a rigid metal extension. Grounding of the rigid metal elbow is not required if the entire RMC elbow is encased in a minimum of 2 in. of concrete. PVC extensions are allowed on these concrete encased rigid metal elbows. RMC or PVC elbows are subsidiary to various bid items.
9. When required, provide High-Density Polyethylene (HDPE) conduit with factory installed internal conductors according to Item 622 "Duct Cable." At the Contractor's request and with approval by the Engineer, substitute HDPE conduit with no conductors for bored schedule 40 or schedule 80 PVC conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule 40 and of the same size PVC called for in the plans. Ensure the substituted HDPE meets the requirements of Item 622, except that the conduit is supplied without factory-installed conductors. Make the transition of the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide conduit of the size and schedule as shown on the plans. Do not extend substituted conduit into ground boxes or foundations. Provide PVC or galvanized steel RMC elbows as called for at all ground boxes and foundations.
10. Use two-hole straps when supporting 2 in. and larger conduits. On electrical service poles, properly sized stainless steel or hot dipped galvanized one-hole standoff straps are allowed on the service riser conduit.

B. CONSTRUCTION METHODS

1. Provide and install expansion joint conduit fittings on all structure-mounted conduits at the structure's expansion joints to allow for movement of the conduit. In addition, provide and install expansion joint fittings on all continuous runs of galvanized steel RMC conduit externally exposed on structures such as bridges at maximum intervals of 150 ft. When requested by the project Engineer, supply manufacturer's specification sheet for expansion joint conduit fittings. Repair or replace expansion joint fittings that do not allow for movement at no additional cost to the Department. Provide the method of determining the amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as a substitute for the required expansion conduit fittings.
2. Space all conduit supports at maximum intervals of 5 ft. Install conduit spacers when attaching metal conduit to surface of concrete structures. See "Conduit Mounting Options" on ED(2). Install conduit support within 3 ft. of all enclosures and conduit terminations.
3. Do not attach conduit supports directly to pre-stressed concrete beams except as shown specifically in the plans or as approved by the Engineer.
4. Unless otherwise shown on the plans, jack or bore conduit placed beneath existing roadways, driveways, sidewalks, or after the base or surfacing operation has begun. Backfill and compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tunneling Pipe or Box" prior to installing conduit or duct cable to prevent bending of the connections.
5. When placing conduit in the sub-grade of new roadways, backfill all trenches with excavated material unless otherwise noted on the plans. When placing conduit in the sub-base of new roadways, backfill all trenches with cement-stabilized base as per requirements of Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Flowable Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Shoring."
6. Provide and place warning tape approximately 10 in. above all trenched conduit as per Item 618.
7. During construction, temporarily cap or plug open ends of all conduit and raceways immediately after installation to prevent entry of dirt, debris and animals. Temporary caps constructed of durable duct tape are allowed. Tightly fix the tape to the conduit opening. Clean out the conduit and prove it clear in accordance with Item 618 prior to installing any conductors.
8. Ensure conduit entry into the top of any enclosure is waterproof by installing conduit sealing hubs or using boxes with threaded bosses. This includes surface mounted safety switches, meter cans, service enclosures, auxiliary enclosures and junction boxes. Grounding bushings on water tight sealing hubs are not required.
9. Fit the ends of all PVC conduit terminations with bushings or bell end fittings. Provide and install a grounding type bushing on all metal conduit terminations.
10. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor. Bonding of conduit used as a casing under roadways for duct cable is not required, if the duct extends the full length through the casing.
11. At all electrical services, install a 6 AWG solid copper grounding electrode conductor.
12. Place conduits entering ground boxes so that the conduit openings are between 3 in. and 6 in. from the bottom of the box. See the ground box detail on sheet ED(4).
13. Seal ends of all conduits with duct seal, expandable foam, or by other methods approved by the Engineer. Seal conduit immediately after completion of conductor installation and pull tests. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a conduit sealant.
14. File smooth the cut ends of all mounting strut and conduit. Before installing, paint the field cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc rich paint (94% or more zinc content) to alleviate overspray. Use zinc rich paint to touch up galvanized material as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material with a zinc rich paint as an alternative for materials required to be galvanized.



Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS
CONDUITS & NOTES

ED(1) - 14

FILE:	ed1-14.dgn	DN:		CK:		DW:		CK:	
© TxDOT	October 2014	CONT	SECT	JOB		HIGHWAY			
REVISIONS						COUNTY		SHEET NO.	
								24	

71A

ELECTRICAL CONDUCTORS

A. MATERIAL INFORMATION

1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS) 11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 AWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.
2. Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.
3. Where two or more circuits are present in one conduit or enclosure, permanently identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.
4. Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

B. CONSTRUCTION METHODS

1. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.
2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.
3. Make splices only in junction boxes, ground boxes, pole bases, or electrical enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.
4. Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.
5. Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.
6. Support conductors in illumination poles with a J-hook at the top of the pole.
7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.
8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.
9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.
10. Do not terminate more than one conductor under a single connector, unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.
11. Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.

C. TEMPORARY WIRING

1. Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.
2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of the following: molded cord and plug set, receptacle, or circuit breaker type.
3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.
4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.
5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NEC.


GROUND RODS & GROUNDING ELECTRODES

A. MATERIAL INFORMATION


1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

B. CONSTRUCTION METHODS


1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade.
2. Do not place ground rods in the same drilled hole as a timber pole.
3. Install ground rods so the imprinted part number is at the upper end of the rod.
4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.
5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.
6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.
7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

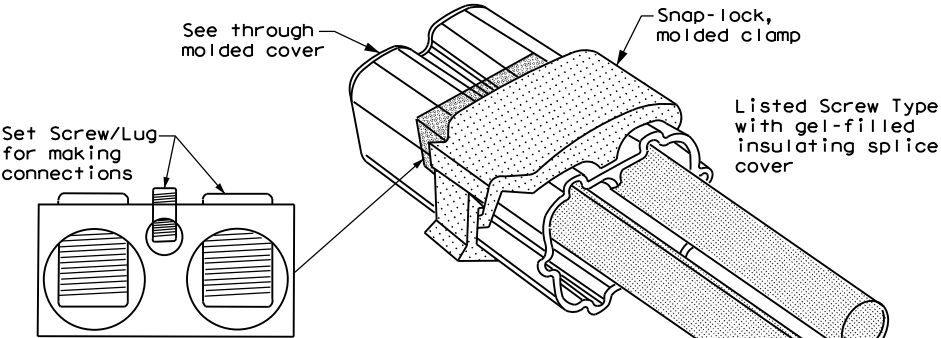

SPLICE OPTION 3
Listed Screw Type

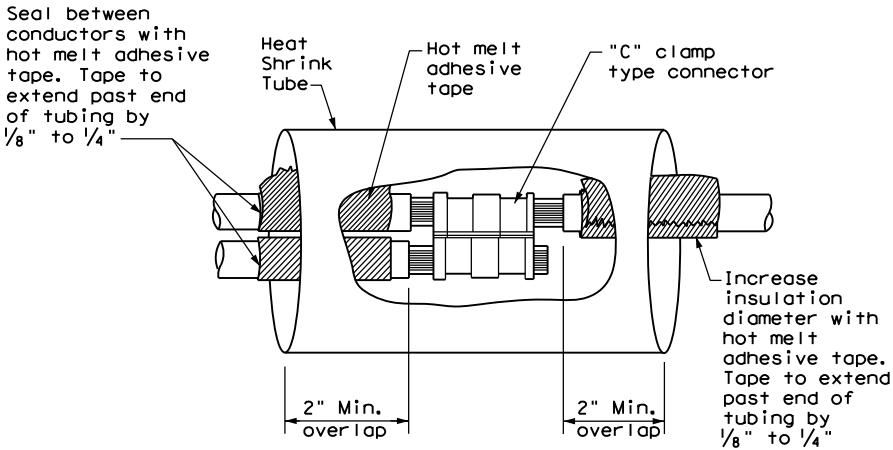

SPLICE OPTION 1
Compression Type

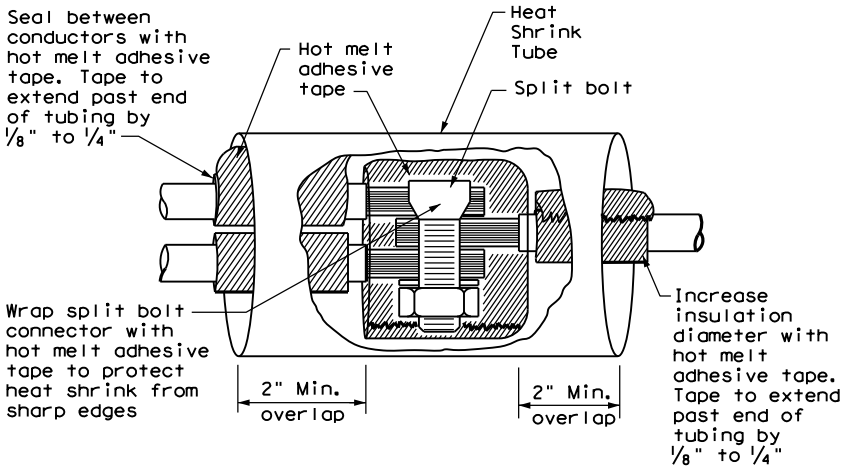

SPLICE OPTION 2
Split Bolt Type



Texas Department of Transportation

Traffic
Operations
Division
Standard


ELECTRICAL DETAILS
CONDUCTORS

ED(3) - 14

FILE:	ed3-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS					
		DIST		COUNTY	SHEET NO.
					25

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

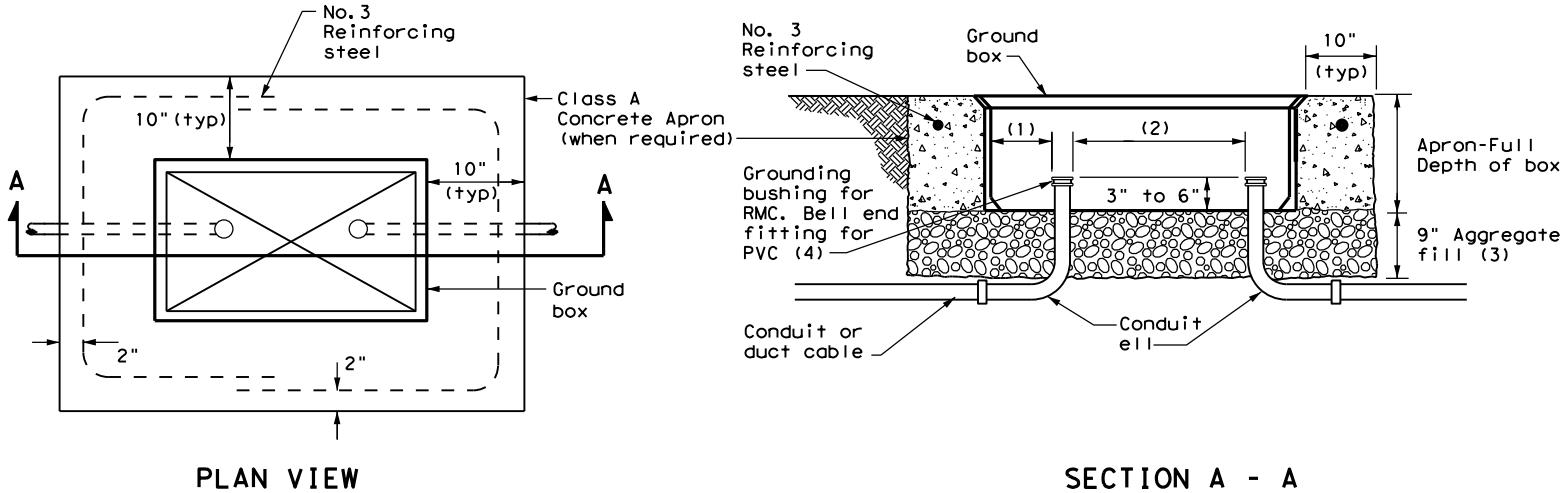


APRON FOR GROUND BOX

- (1) Uniformly space ends of conduits within the ground box. Position ends of conduits so that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushing.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

GROUND BOX DIMENSIONS	
TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
A	12 X 23 X 11
B	12 X 23 X 22
C	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

GROUND BOX COVER DIMENSIONS								
TYPE	DIMENSIONS (INCHES)							
	H	I	J	K	L	M	N	P
A, B & E	23 1/4	23	13 3/4	13 1/2	9 7/8	5 1/8	1 3/8	2
C & D	30 1/2	30 1/4	17 1/2	17 1/4	13 1/4	6 3/4	1 3/8	2

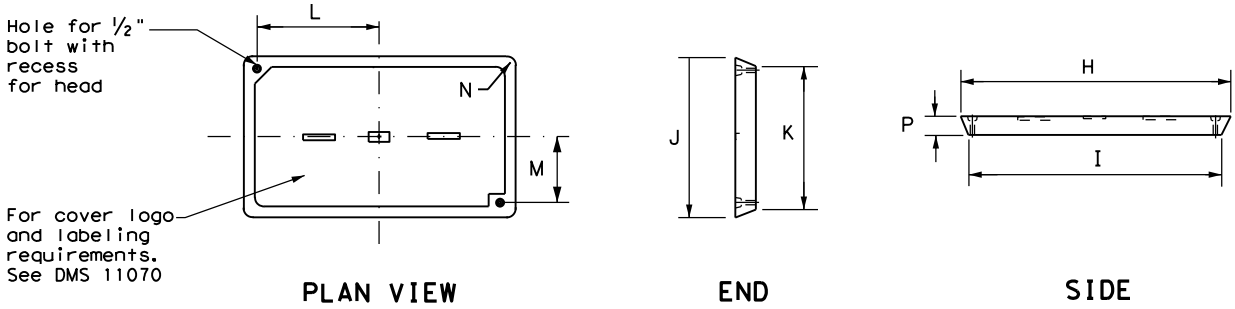

GROUND BOX COVER

GROUND BOXES

A. MATERIALS

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and Item 624 "Ground Boxes."
2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 624.

3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.

4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

B. CONSTRUCTION METHODS

1. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of aggregate.
2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.
3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground boxes.
4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.
5. Temporarily seal all conduits in the ground box until conductors are installed.
6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a sealant.
7. When a ground rod is present in a ground box, bond all equipment grounding conductors together and to the ground rod with listed connectors.
8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches below grade.
9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes fully describing the work required.
10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.
11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.



Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS

GROUND BOXES

ED(4) - 14

FILE: ed4-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	DIST	COUNTY	SHEET NO.	
			26	

ELECTRICAL SERVICES NOTES

1. Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State.
2. Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services," DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)," and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans.
3. Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans.
4. Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as approved.
5. The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed.
6. Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC.
7. When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used.
8. Provide wiring and electrical components rated for 75°C. Provide red, black, and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility.
9. All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately.
10. Provide rigid metal conduit (RMC) for all conduits on service, except for the 1/2 in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits a minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure.
11. Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer.
12. Ensure all mounting hardware and installation details of services conform to utility company specifications.
13. For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the laminated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. If the installation differs from the plan sheets, the installing contractor is to redline plan sheets before laminating.
14. When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket.
15. Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

SERVICE ASSEMBLY ENCLOSURE

1. Provide threaded hub for all conduit entries into the top of enclosure.
2. Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photocell or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
3. Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
4. Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

1. Field drill flange-mounted remote operator handle if needed, to ensure handle is lockable in both the "On" and "Off" positions.
2. When the utility company provides a transformer larger than 50 KVA, verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.

PHOTOELECTRIC CONTROL

1. Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.



* ELECTRICAL SERVICE DATA												
Elec. Service ID	Plan Sheet Number	Electrical Service Description	Service Conduit **Size	Service Conductors No./Size	Safety Switch Amps	Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	KVA Load
SB 183	289	ELC SRV TY A 240/480 100(SS)AL(E)SF(U)	2"	3/#2	100	2P/100	100	N/A	Lighting NB	2P/40	26	28.1
									Lighting SB	2P/40	25	
									Underpass	1P/20	15	
NB Access	30	ELC SRV TY D 120/240 060(NS)SS(E)TS(O)	1 1/4"	3/#6	N/A	2P/60		100	Sig. Controller	1P/30	23	5.3
							30		Luminares	2P/20	9	
									CCTV	1P/20	3	
2nd & Main	58	ELC SRV TY T 120/240 000(NS)GS(N)SP(O)	1 1/4"	3/#6	N/A	N/A	N/A	70	Flashing Beacon 1	1P/20	4	1.0
									Flashing Beacon 2	1P/20	4	

* Example only, not for construction. All new electrical services must have electrical service data chart specific to that service as shown in the plans.

** Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National Electrical Code.

EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

ELEC SERV TY X XXX/XXX XXX (XX) XX (X) XX (X)

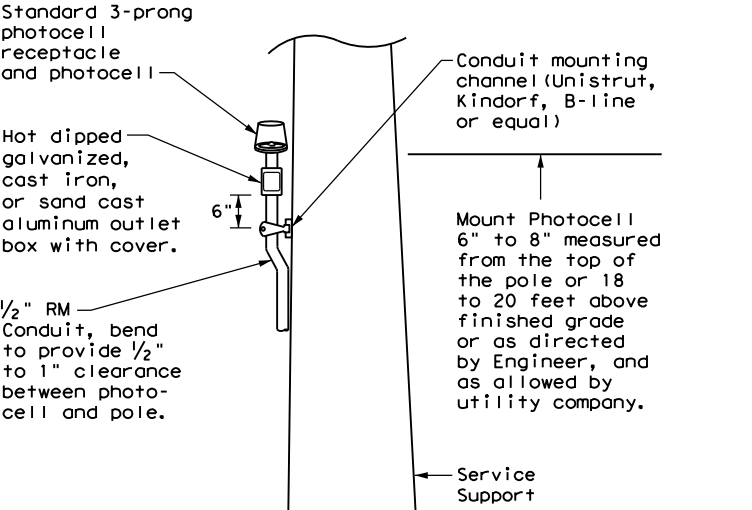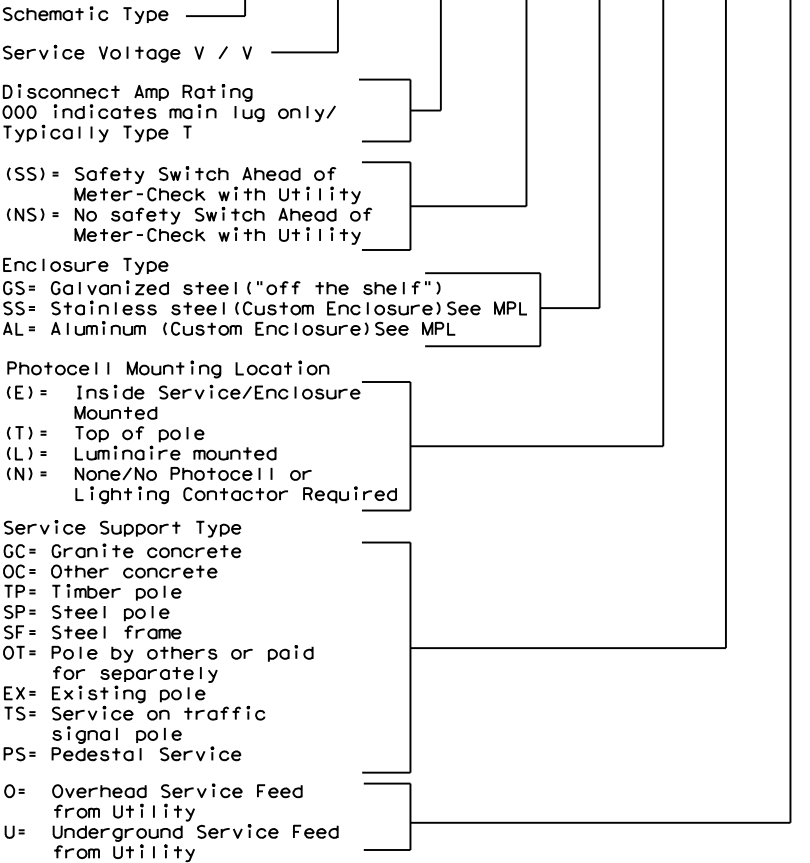

TOP MOUNTED PHOTOCELL

Install conduit strap maximum 3 feet from box. 5 foot maximum spacing between straps supporting conduit.

Texas Department of Transportation


Traffic Operations Division Standard

ELECTRICAL DETAILS
SERVICE NOTES & DATA


ED(5) - 14

FILE: ed5-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS				
	DIST		COUNTY	SHEET NO.
				27


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

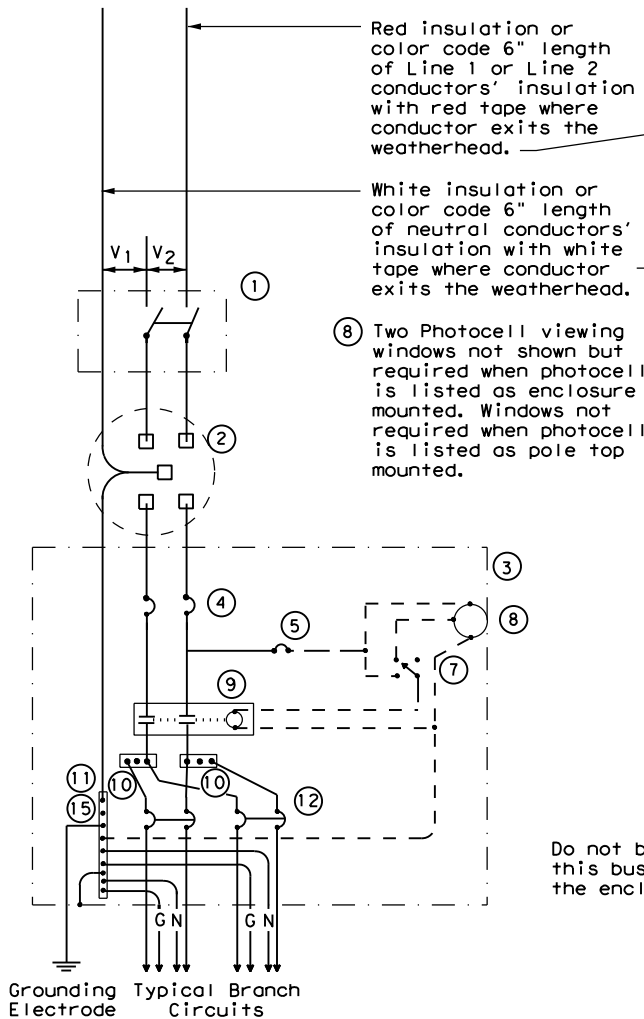


SCHEMATIC TYPE A
THREE WIRE

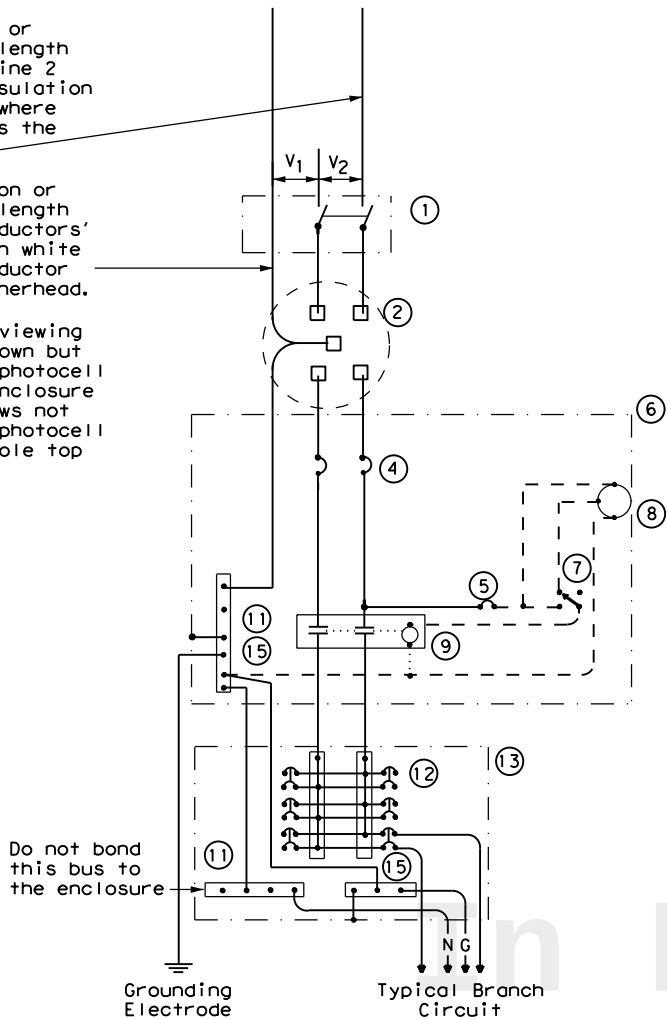

SCHEMATIC TYPE C
THREE WIRE

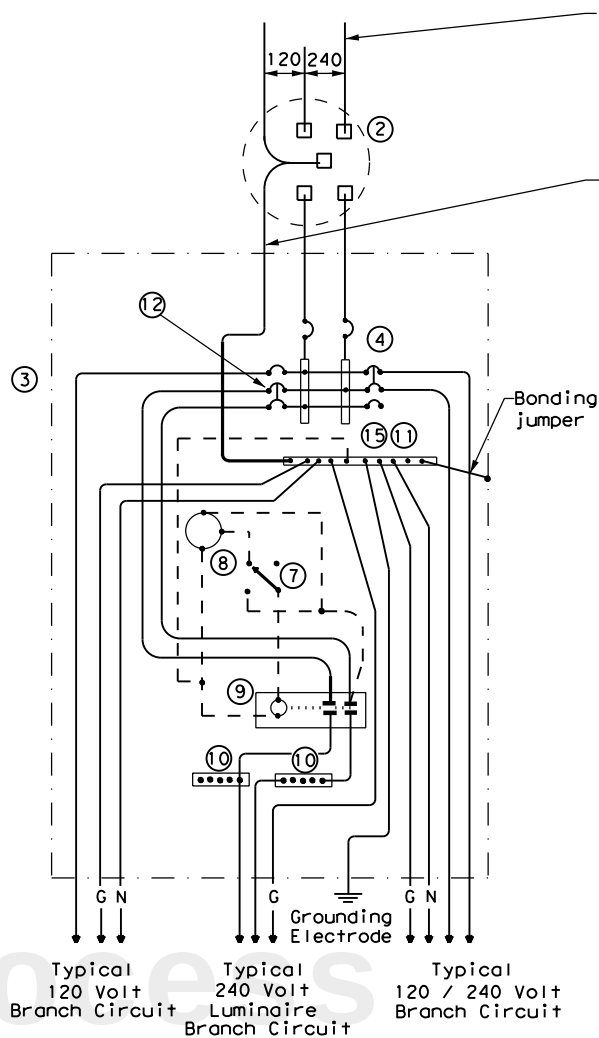

SCHEMATIC TYPE D - CUSTOM
120/240 VOLTS - THREE WIRE

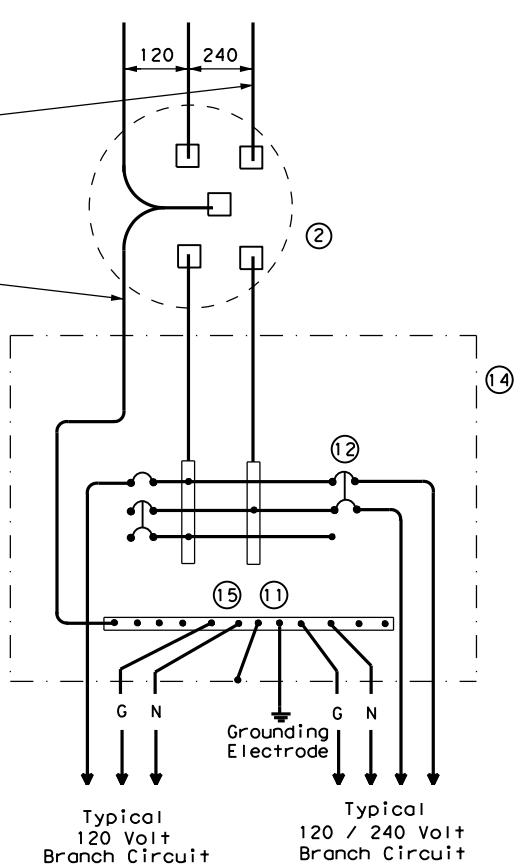

SCHEMATIC TYPE T
120/240 VOLTS - THREE WIRE
Galvanized steel - "Buy Off The Shelf" only. When required install photocell top of the pole or on luminaire only, no lighting contractor will be installed.

WIRING LEGEND	
—	Power Wiring
- - - -	Control Wiring
—N—	Neutral Conductor
—G—	Equipment grounding conductor-always required

SCHEMATIC LEGEND	
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure-mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus



Texas Department of Transportation


Traffic Operations Division Standard

**ELECTRICAL DETAILS
SERVICE ENCLOSURE
AND NOTES**
ED(6) - 14

FILE: ed6-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	DIST	COUNTY	SHEET NO. 28	

TRAFFIC SIGNAL NOTES

1. Do not pass luminaire conductors through the signal controller cabinet.
2. Include an equipment grounding conductor in all conduits throughout the electrical system. Bond all exposed metal parts to the grounding conductor.
3. Provide roadway luminaires, when required, in accordance with the material and construction sections of Item 610, "Roadway Illumination Assemblies," except for performance testing of luminaires. Test installed roadway luminaires for proper operation as a part of the associated traffic signal system test.
4. If internally illuminated street name signs are approved for use, ground the fixture to the pole with a 12 AWG green XHHW conductor.
5. Bond anchor bolts to rebar cage in two locations using #3 bars or 6 AWG stranded copper conductors. Use listed mechanical connectors rated for embedment in concrete. See TxDOT standard TS-FD for further details.
6. Drill and tap signal poles for 1/2 in. X 13 UNC tank ground fitting. Provide and install tank ground fitting 4 in. to 6 in. directly below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Connect the electrical service grounding electrode conductor to the tank ground fitting. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. See Inset A detail for further information. Size service entrance conduit and branch circuit conduit as shown in the plans.
7. Mount electrical service enclosure and meter to signal pole with stainless steel bands. Ensure bands are a minimum width of 3/4 in. Secure enclosures to bands using two-bolt brackets. Install brackets near top and bottom of each enclosure. Install properly sized stainless steel washers on each bolt in the enclosure. Band or drill and tap properly sized stand-off straps to signal pole for attaching conduit.
8. Conduct pull tests and insulation resistance tests on all illumination and power conductors as required in Item 620 "Electrical Conductors" and ED(3). To prevent electronics damage, do not conduct insulation resistance tests on traffic signal cables after termination.
9. Lock all enclosures and bolt down all ground box covers before applying power to the signal installation.
10. Terminate conduits entering the top of enclosures with a conduit-sealing hub or threaded boss such as meter hub. Install a grounding bushing on all metal conduits not connected to conduit-sealing hub or threaded boss. Bond the grounding bushing to the ground bus with a bonding jumper. Seal all conduits entering enclosures with duct seal or expanding foam. Do not use silicone to seal conduit ends.
11. For all conduits, ensure the burial depth is a minimum of 18". Ensure the minimum burial depth for conduit placed under a roadway is 24".

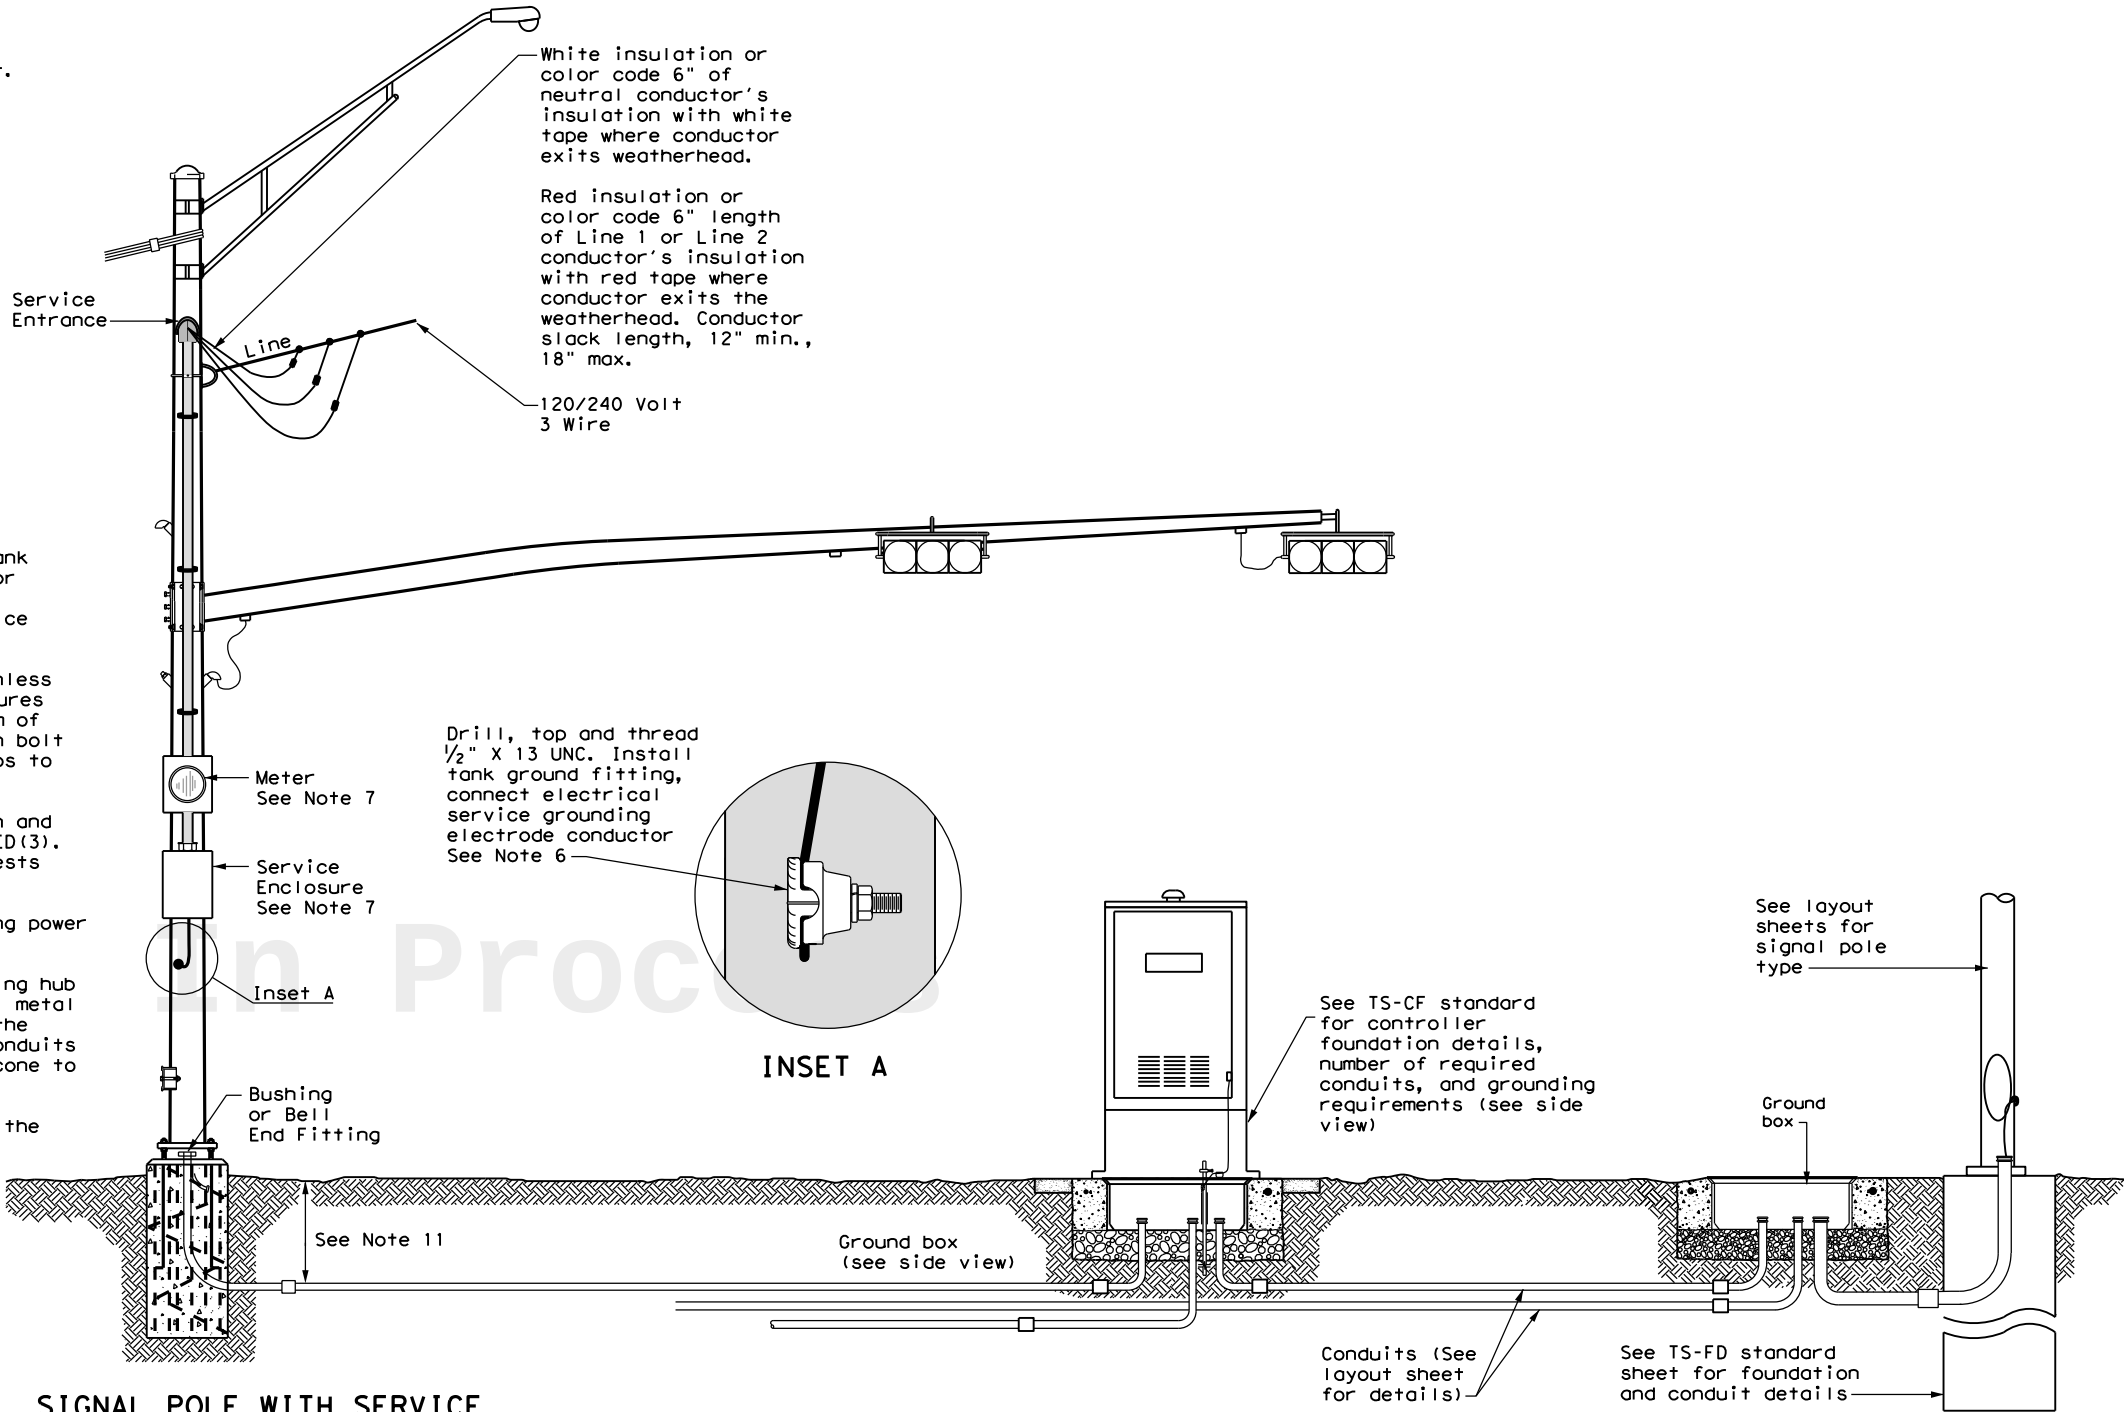


SIGNAL POLE WITH SERVICE

Type T electrical service mounted on signal pole shown as an example. See electrical details, layout sheets, and electrical service data chart for additional details.

SIGNAL CONTROLLER FRONT VIEW

SIGNAL POLE

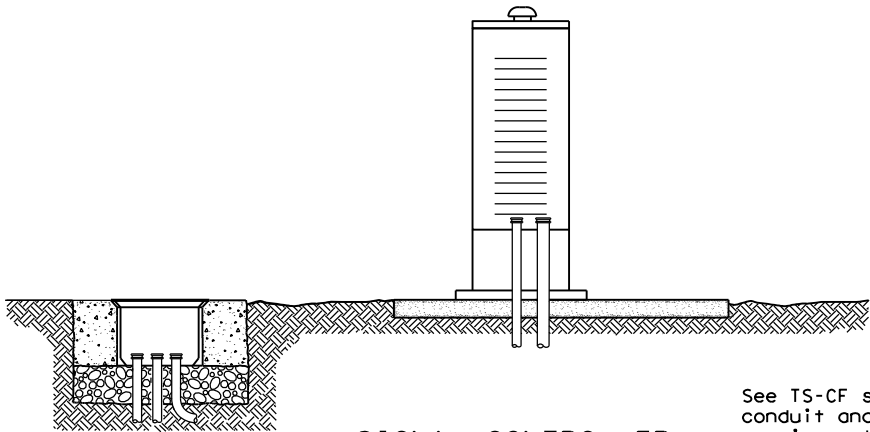

SIGNAL CONTROLLER SIDE VIEW

See TS-CF standard for conduit and grounding requirements. See layout sheets for ground box locations and any additional conduits that are required.



Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS

TYPICAL TRAFFIC SIGNAL

SYSTEM DETAILS

ED(8) - 14

FILE: ed8-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	DIST	COUNTY	SHEET NO.	
			29	

71H


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PEDESTAL SERVICE NOTES

1. Manufacture pedestal electrical services in accordance with Departmental Material Specifications (DMS) 11080 "Electrical Services", 11085 "Electrical Services-Pedestal (PS)" and Item 628 "Electrical Services." Provide pedestal electrical services as listed on the Material Producers List (MPL) on the Department's web site under "Roadway Illumination and Electrical Supplies," Item 628. Ensure all mounting hardware and installation details of services meet utility company specifications. Contact the local utility company for approval of pedestal details prior to installing the electrical pedestal service. Submit any changes required by the utility company prior to manufacturing the pedestal enclosure.
2. When a meter socket is required, provide a socket with a minimum 100 amp rating that complies with local utility requirements.
3. Provide Class A or C concrete for pedestal service foundations in accordance with Item 420, "Concrete Substructures," except that concrete will not be paid for directly but is considered subsidiary to Item 628.
4. Provide #4 reinforcing steel for foundations in accordance with Item 440, "Reinforcement for Concrete."
5. Install 1/2 in. X 2 1/6 in. minimum length concrete single expansion type anchors for mounting pedestal enclosure to foundation. Anchor location to match mounting holes in each corner of enclosure. Secure each of the four corners of the pedestal enclosure to the anchors in the foundation with a 1/2 in. galvanized or stainless steel machine thread bolt, a properly sized locknut and a flat washer.
6. Finish top of concrete foundation in a neat and workmanlike manner. If leveling washers are used, ensure no more than 1/8 in. gap at any corner. Do not exceed a maximum dip or rise in the foundation of 1/8 in. per foot. When properly installed, ensure the top of the service enclosure is level front to back and side to side within 1/4 in. Repair rocking or movement of the service enclosure at no additional cost to the department.
7. Do not use liquidtight flexible metal conduit (LFMC) on pedestal type services.
8. Ensure all elbows in the foundation are sized as per utility provider's conduit requirements for underground conduit and feeders. PVC extensions may be installed provided the ends of the rigid metal conduits are more than 2 in. below the top of the concrete foundation. Where extension conduits are metal, grounding bushings must be installed with a bonding jumper properly terminated.

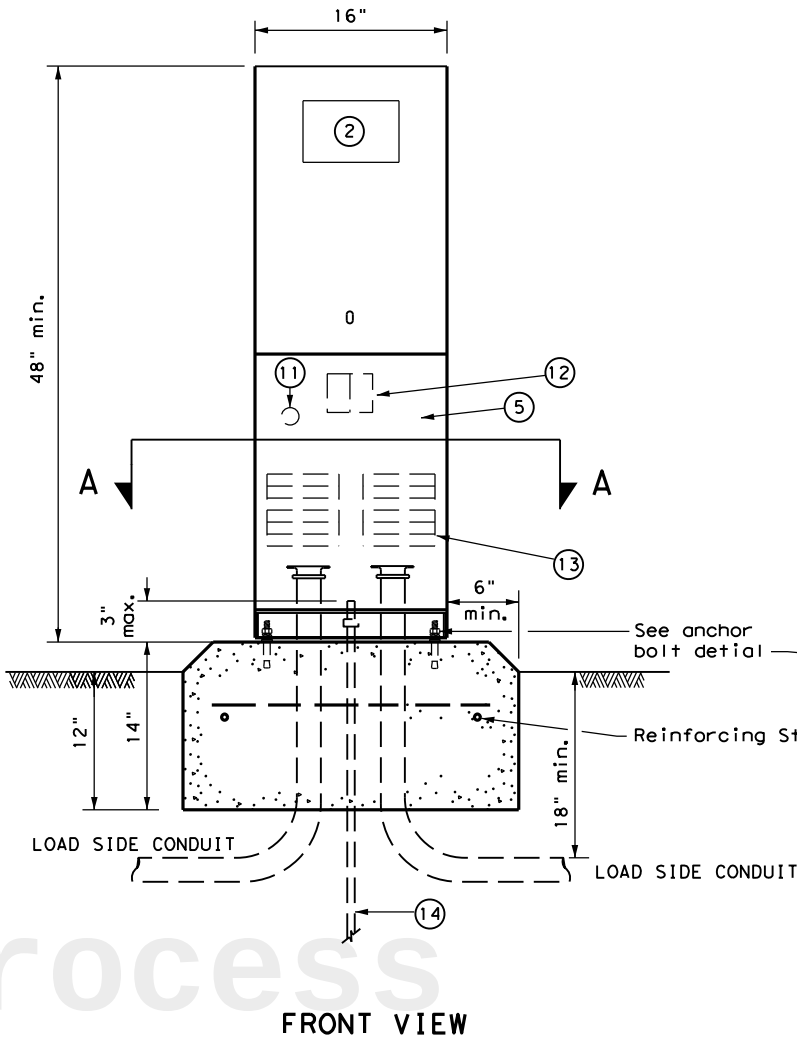


FRONT VIEW

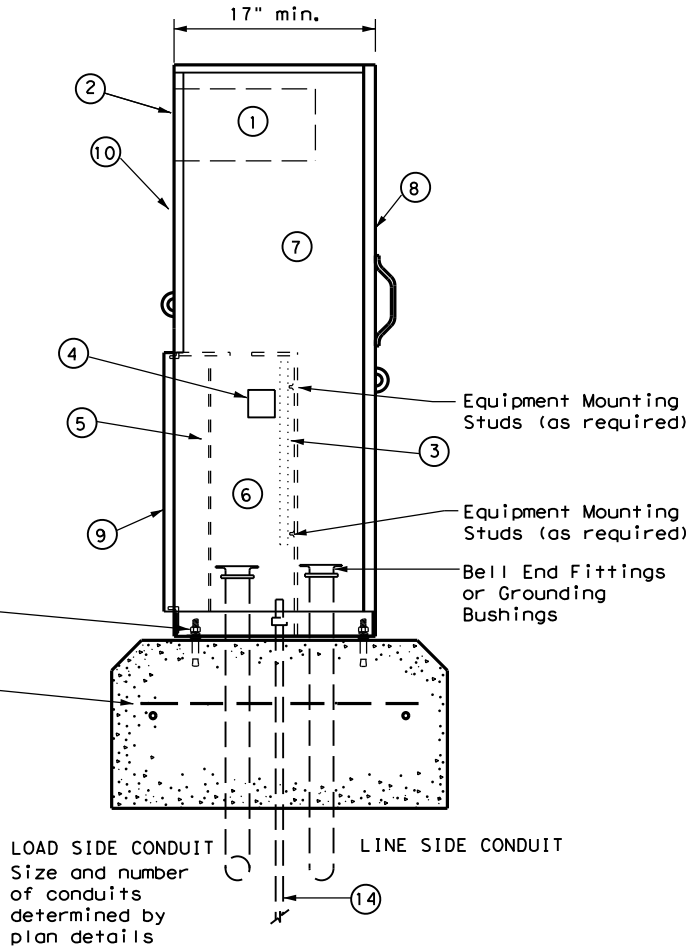


SIDE VIEW

TYPE C shown, TYPE A similar except that TYPE A shall have individual circuit breakers (CB) mounted on an equipment mounting panel. CB Handles shall protrude through hinged deadfront trim.

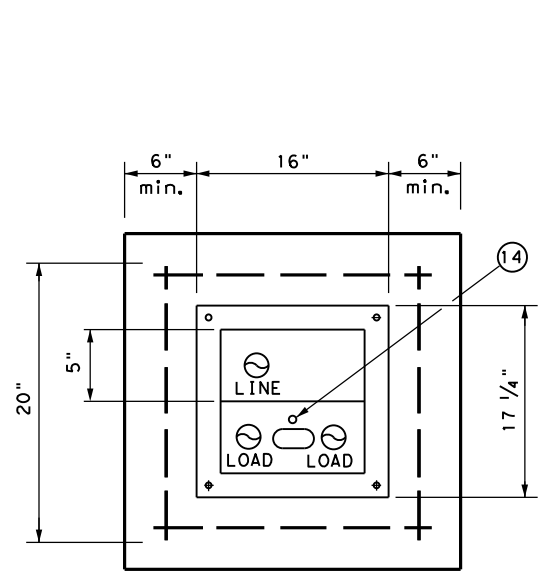

SECTION A-A

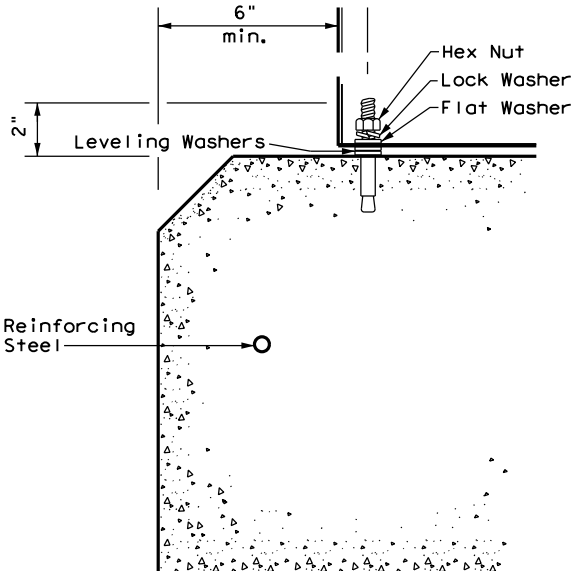

ANCHOR BOLT DETAIL

LEGEND

1	Meter Socket, (when required)
2	Meter Socket Window, (when required)
3	Equipment Mounting Panel
4	Photo Electric Control Window, (When required)
5	Hinged Deadfront Trim
6	Load Side Conduit Trim
7	Line Side Conduit Area
8	Utility Access Door, with handle
9	Pedestal Door
10	Hinged Meter Access
11	Control Station (H-O-A Switch)
12	Main Disconnect
13	Branch Circuit Breakers
14	Copper Clad Ground Rod - 5/8" X 10'



Texas Department of Transportation

Traffic Operations Division Standard

ELECTRICAL DETAILS

ELECTRICAL SERVICE SUPPORT

PEDESTAL SERVICE TYPE PS

ED(9) - 14

FILE: ed9-14.dgn

DN: TxDOT

CK: TxDOT

DW: TxDOT

CR: TxDOT

© TxDOT October 2014

CONT

SECT

JOB

HIGHWAY

REVISIONS

DIST

COUNTY

SHEET NO.

30

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

Arm Length	ROUND POLES					POLYGONAL POLES					Foundation Type
	D _B	D ₁₉	D ₂₄	D ₃₀	① thk	D _B	D ₁₉	D ₂₄	D ₃₀	① thk	
ft.	in.	in.	in.	in.		in.	in.	in.	in.		
20	10.5	7.8	7.1	6.3	.179	11.5	8.5	7.7	6.8	.179	30-A
24	11.0	8.3	7.6	6.8	.179	12.0	9.0	8.2	7.3	.179	30-A
28	11.5	8.8	8.1	7.3	.179	12.5	9.5	8.7	7.8	.179	30-A
32	12.5	9.8	9.1	8.3	.179	12.0	9.0	8.2	7.3	.239	30-A
36	12.0	9.3	8.6	7.8	.239	12.5	9.5	8.7	7.8	.239	36-A
40	12.0	9.3	8.6	7.8	.239	13.5	10.5	9.7	8.8	.239	36-A
44	12.5	9.8	9.1	8.3	.239	14.0	11.0	10.2	9.3	.239	36-A
48	13.0	10.3	9.6	8.8	.239	15.0	12.0	11.2	10.3	.239	36-A

Arm Length	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	① thk	Rise	L ₁	D ₁	② D ₂	① thk	Rise
ft.	ft.	in.	in.	in.		ft.	in.	in.	in.	
20	19.1	6.5	3.8	.179	1'-9"	19.1	7.0	3.5	.179	1'-8"
24	23.1	7.5	4.3	.179	1'-10"	23.1	7.5	3.5	.179	1'-9"
28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10"
32	31.0	9.0	4.7	.179	2'-1"	31.0	9.0	3.5	.179	2'-0"
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2'-1"
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"
48	47.0	10.5	4.1	.239	3'-4"	47.0	11.0	3.5	.239	2'-9"

D_B = Pole Base O.D.
D₁₉ = Pole Top O.D. with no Luminaire and no ILSN
D₂₄ = Pole Top O.D. with ILSN w/out Luminaire
D₃₀ = Pole Top O.D. with Luminaire
D₁ = Arm Base O.D.
D₂ = Arm End O.D.
L₁ = Shaft Length
L = Nominal Arm Length

- ① Thickness shown are minimums, thicker materials may be used.
② D₂ may be increased by up to 1" for polygonal arms.

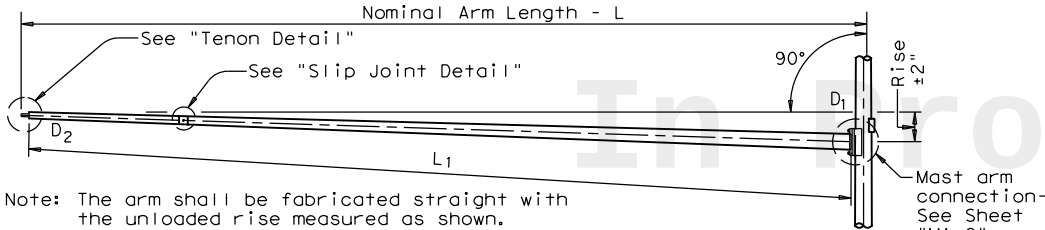

Note: The arm shall be fabricated straight with the unloaded rise measured as shown.

TRAFFIC SIGNAL ARM

(Fixed Mount)

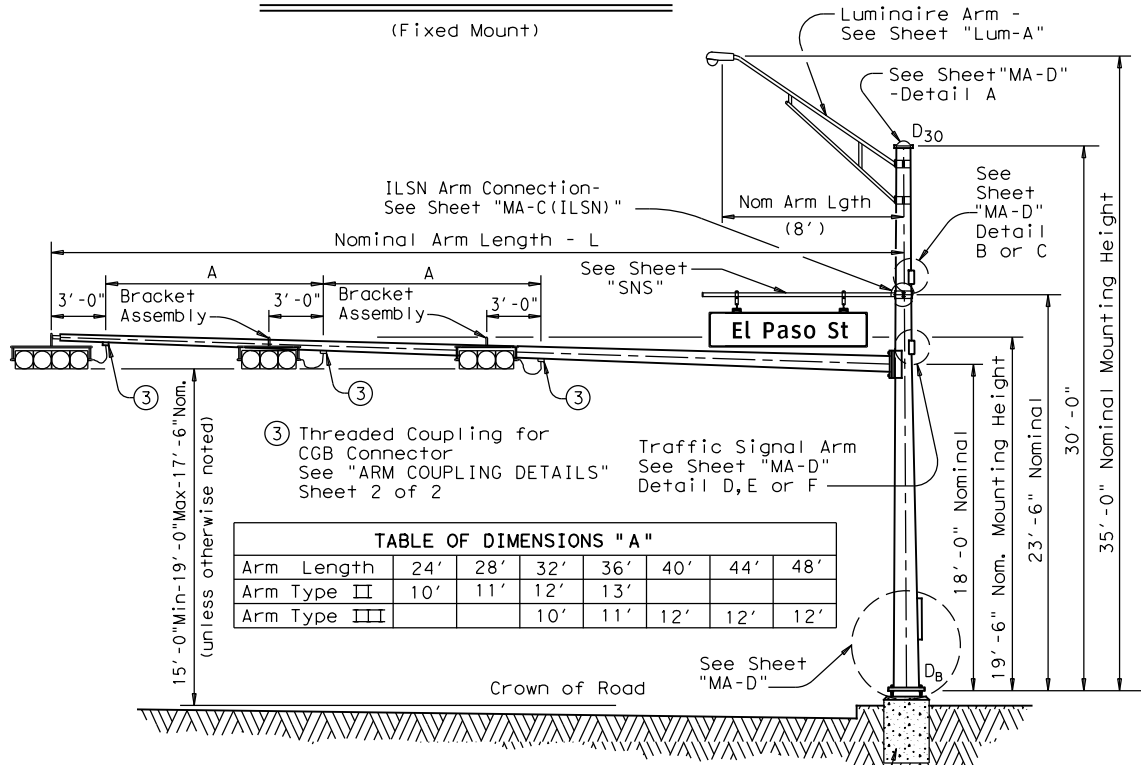


TABLE OF DIMENSIONS "A"

Arm Length	24'	28'	32'	36'	40'	44'	48'
Arm Type II	10'	11'	12'	13'			
Arm Type III			10'	11'	12'	12'	12'

STRUCTURE ASSEMBLY

SHIPPING PARTS LIST									
Ship each pole with the following attached: enlarged hand hole, pole cap, fixed-arm connection bolts and washers and any additional hardware listed in the table.									
Nominal Arm Length	30' Poles With Luminaire		24' Poles With ILSN		19' Poles With No Luminaire and No ILSN				
	Above hardware plus: One (or two if ILSN attached) small hand hole, clamp-on simplex		Above hardware plus one small hand hole		See note above				
	ft	Designation	Quantity	Designation	Quantity	Designation	Quantity		
20	20L-80		20S-80		20-80				
24	24L-80		24S-80		24-80				
28	28L-80		28S-80		28-80				
32	32L-80		32S-80		32-80				
36	36L-80		36S-80		36-80				
40	40L-80	3	40S-80		40-80	1			
44	44L-80		44S-80		44-80				
48	48L-80		48S-80		48-80				
Traffic Signal Arms (1 per Pole) Ship each arm with the listed equipment attached									
Nominal Arm Length	Type I Arm (1 Signal)		Type II Arm (2 Signals)		Type III Arm (3 Signals)				
	1 CGB connector		1 Bracket Assembly and 2 CGB Connectors		2 Bracket Assemblies and 3 CGB Connectors				
	ft	Designation	Quantity	Designation	Quantity	Designation	Quantity		
20	20I-80								
24	24I-80		24II-80						
28	28I-80		28II-80						
32			32II-80		32III-80				
36			36II-80		36III-80				
40					40III-80	4			
44					44III-80				
48					48III-80				
Luminaire Arms (1 per 30' pole)									
Nominal Arm Length		Quantity							
8' Arm		3							
ILSN Arm (Max. 2 per pole) Ship with clamps, bolts and washers									
Nominal Arm Length		Quantity							
7' Arm									
9' Arm									
Anchor Bolt Assemblies (1 per pole)									
Anchor Bolt Diameter	Anchor Bolt Length	Each anchor bolt assembly consists of the following: Top and Bottom templates, 4 anchor bolts, 8 nuts, 8 flat washers, and 4 nut anchor devices (Type 2) per Standard Drawing "TS-FD". Templates may be removed for shipment.							
							Quantity		
1 1/2"	3'-4"								
1 3/4"	3'-10"						4		



THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

10/11/2024

SHEET 1 OF 2


Texas Department of Transportation
Traffic Operations Division
**TRAFFIC SIGNAL
SUPPORT STRUCTURES**
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(1)-12

© TxDOT August 1995	DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS	CONT	SECT	JOB	HIGHWAY
	DIST	COUNTY		SHEET NO.
				31


122A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

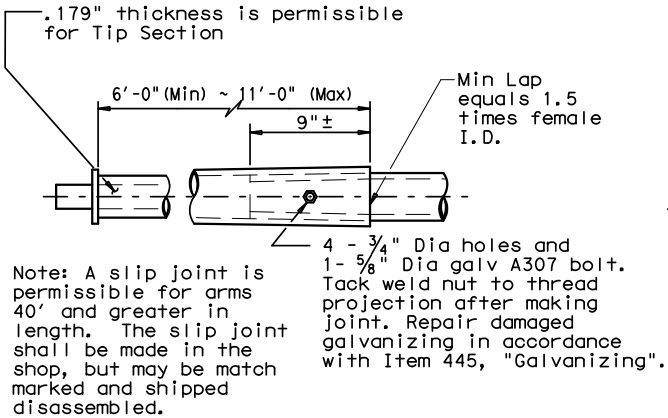


SLIP JOINT DETAIL

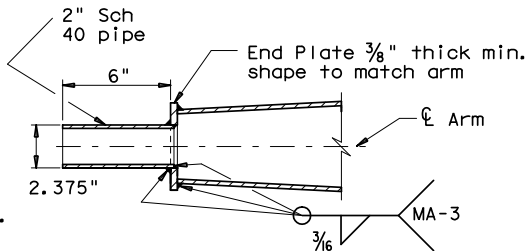

TENON DETAIL


Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

BRACKET ASSEMBLY

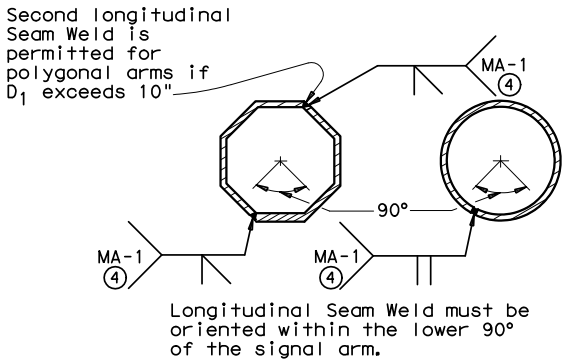

ARM WELD DETAIL

④ 60% Min. penetration
100% pemetration within 6" of circumferential base welds.

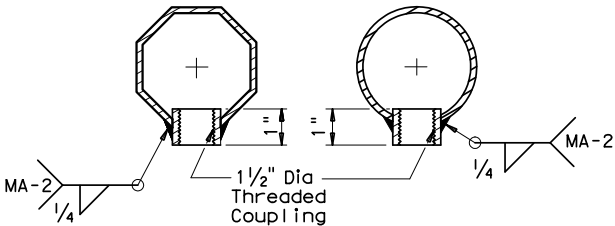

ARM COUPLING DETAILS

VIBRATION WARNING

Mast Arms of SMA and DMA structures and clamp-on Arms of LMA structures of approximately 40 ft or longer are subject to harmonic vertical vibrations in light wind conditions due to the aeroelastic characteristics of a few of the myriads of possible combinations of the following: signal numbers, weights and positions; existence/solidity of backplates; presence of additional attachments to the arm, such as signs and cameras; arm-wind orientation; and arm-pole stiffness.

Such vibrations may cause fatigue damage to the structure and may lead to galloping in moderate wind conditions which may further damage the structure and alarm the public. Tests have indicated that when wind is blowing toward the back side of signal heads having un-vented backplates attached the probability of unacceptable harmonic vibration and/or galloping is rather high.

If backplates are not required for improved visibility they should not be applied to the signal heads or, if they must be applied, they should be vented as a first and inexpensive measure to mitigate vibrations.

The traffic signal mast arms shall be visually inspected in 5 to 20 mph wind conditions after installation of signal heads and any attachments, including any required backpates. If vertical movements with a total excursion (maximum upward excursion to maximum downward excursion) of more than approximately 8" are observed at the arm tip, a damping plate shall be fitted to the arm. See "Damping Plate Mounting Details" on standard sheet, MA-DPD-10.

This visual inspection shall be repeated after each modification of the structure that could affect its aeroelastic response. Excessive vibrations shall not be allowed to continue for more than two days.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor.

Poles are designed to support one 8'-0" luminaire arm, one 9'-0" internally lighted street name sign and one traffic signal arm with a length as tabulated. The specified luminaire load applied at the end of the luminaire arm equals 60 lbs vertical dead load plus the horizontal wind load on an effective projected area of 1.6 sq ft. The specified internally lighted street name sign load applied 4.5 ft from the centerline of the pole equals 85 lbs vertical dead load plus horizontal wind load on an effective projected area of 11.5 sq ft. The specified signal load applied at the end of the traffic signal arm equals 180 lbs vertical dead load plus the horizontal wind load on an effective projected area of 32.4 sq ft (actual area times drag coefficient).

See Standard Sheet "MA-D" for pole details, "MA-C" for traffic signal arm connection details, "MA-C (ILSN)" for internally lighted street name sign arm connection details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details. See "MA-C" for material specifications.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing", after fabrication.

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

SHEET 2 OF 2



Texas Department of Transportation
Traffic Operations Division

TRAFFIC SIGNAL
SUPPORT STRUCTURES
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(2)-12

© TxDOT August 1995	DN: MS	CK: JSY	DW: MMF	CK: JSY		
5-96 1-12	REVISIONS		CONT	SECT	JOB	HIGHWAY
			DIST	COUNTY		SHEET NO.
					32	

122B

NOTES:

- ### FOUNDATION SELECTION TABLE FOR STANDARD MAST ARM PLUS ILSN SUPPORT ASSEMBLIES (ft)

⑦ Min dimensions given,
longer bolts are acceptable.

- [illegible]

⑧ Orient anchor bolts orthogonal with the fixed arm direction to ensure that two bolts are in tension under dead load.

Span Wires

Luminaire Arm (optional)

Sway Cable

Anchor bolts to be approximately oriented so that two bolts are in tension from the Span Wire loads.

17'-6" Nominal

The diagram illustrates a typical mast arm with the following dimensions and components:

- Clamp Arm Length:** The distance from the base to the luminaire arm attachment point.
- Fixed Arm Length:** The distance from the luminaire arm attachment point to the luminaire.
- Luminaire Arm (optional):** The arm that holds the luminaire.
- ILSN Supporting Arm:** The arm that supports the ILSN.
- 8'-0":** The height of the mast arm at the base.
- 19'-6" ±:** The height of the mast arm at the luminaire mounting point.
- 35' Lum. Mounting Height:** The total height of the luminaire mounting point.
- 19'-6" ±:** The height of the luminaire mounting point at the base.
- 19'-6" ±:** The height of the luminaire mounting point at the base.
- 19'-6" ±:** The height of the luminaire mounting point at the base.

FOUNDATION DETAILS

FOUNDATION SUMMARY TABLE ⁽³⁾

LOCATION IDENTIFICATION	AVG. N BLOW /ft.	FDN TYPE	NO. EA	DRILLED SHAFT LENGTH (6) (FEET)				
				24-A	30-A	36-A	36-B	42-A
POLE 1	10	86-A	1			13.2		
POLE 2	10	86-A	1			13.2		
POLE 3	10	86-A	1			13.2		
POLE 4	10	86-A	1			13.2		
TOTAL DRILLED SHAFT LENGTHS						53		

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals and interim revisions thereto.

Reinforcing steel shall conform to Item 440, "Reinforcing Steel".

Concrete shall be Class "C".

Threads for anchor bolts and nuts shall be rolled or cut threads of 8UN series up to 2" in diameter or UNC series for all sizes. Bolts and nuts shall have Class 2A and 2B fit tolerances. Galvanized nuts shall be tapped after galvanizing.

Anchor bolts that are larger than 1" in diameter shall conform to "alloy steel" or "medium-strength mild steel" per Item 449, "Anchor Bolts". Anchor bolts that are 1" in diameter or less shall conform to ASTM A36. Galvanize a minimum of the top end thread length plus 6" for all anchor bolts unless otherwise noted. Exposed washers and exposed nuts shall be galvanized. All galvanizing shall be in accordance with Item 445, "Galvanizing".


Templates and embedded nuts need not be galvanized. Lubricate and tighten anchor bolts when erecting the structure in accordance with Item 449, "Anchor Bolts".



**TRAFFIC SIGNAL
POLE FOUNDATION**

TS-FD-12

© TxDOT August 1995 REVISIONS 5-95 11-99 1-12		DN: MS		CK: JSY		DW: MAO/MMF		CK: JSY/TE/TE	
		CONT		SECT		JOB		HIGHWAY	
		DIST		COUNTY				SHEET NO.	
								33	




THE SEAL APPEARING ON THIS
DOCUMENT WAS AUTHORIZED BY:


10/11/2024

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

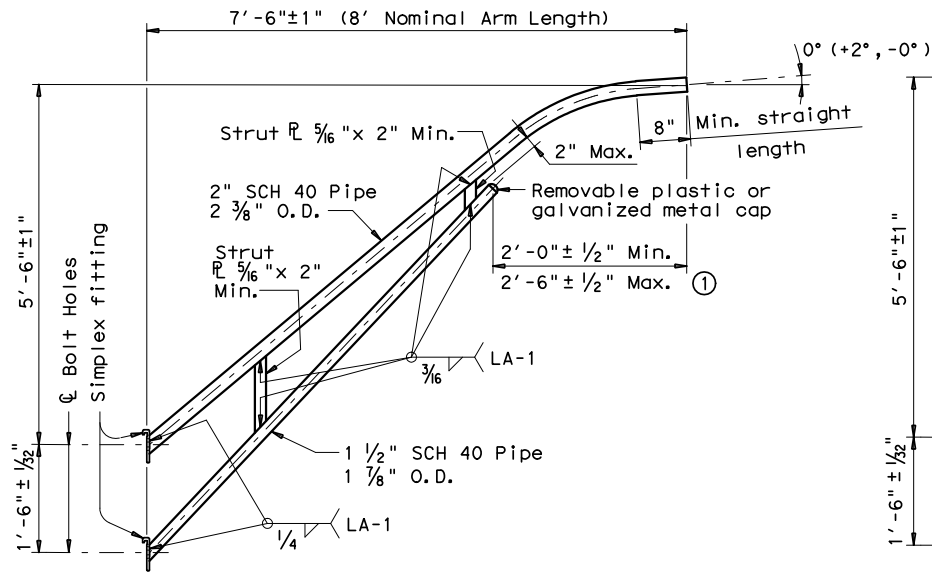


8-FOOT LUMINAIRE ARM

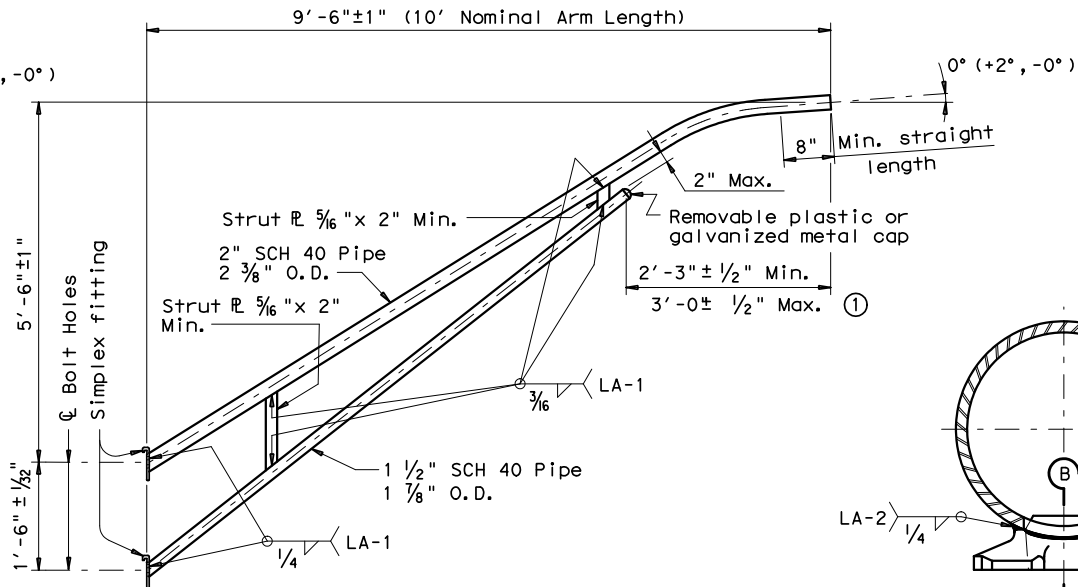

10-FOOT LUMINAIRE ARM




DIRECT ATTACHMENT
DETAIL

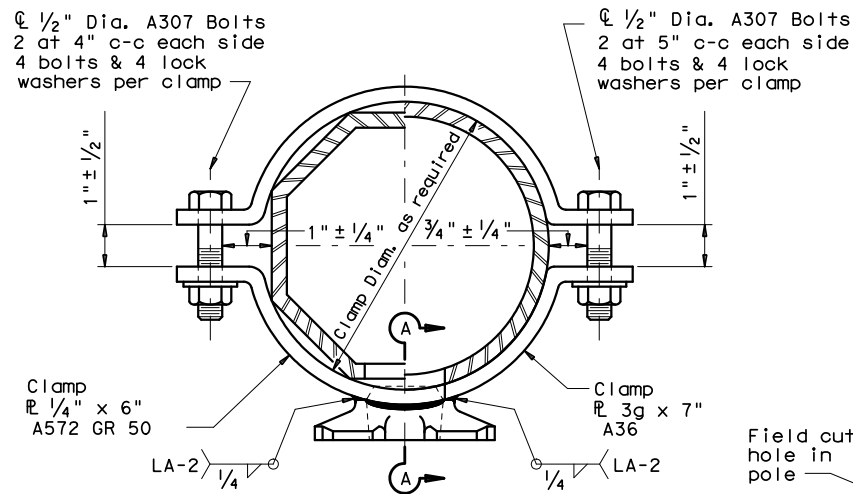


CLAMP ATTACHMENT
DETAIL NO. 1
(HALF SECTION)

CLAMP ATTACHMENT
DETAIL NO. 2
(HALF SECTION)

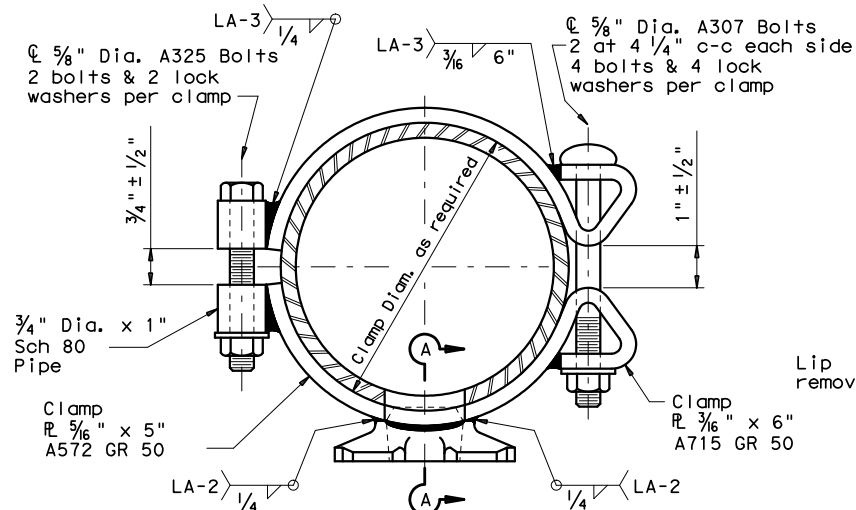


CLAMP ATTACHMENT
DETAIL NO. 3
(HALF SECTION)


CLAMP ATTACHMENT
DETAIL NO. 4
(HALF SECTION)

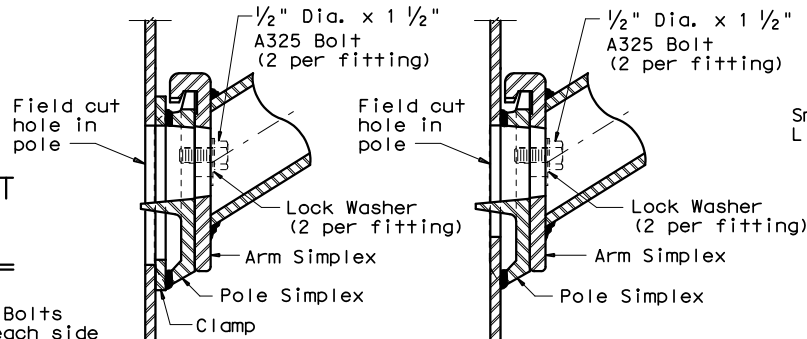


UPPER SIMPLEX FITTING




UPPER SIMPLEX FITTING

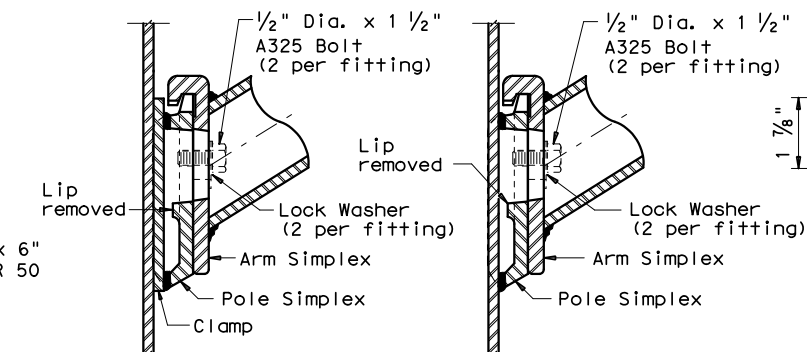


LOWER SIMPLEX FITTING

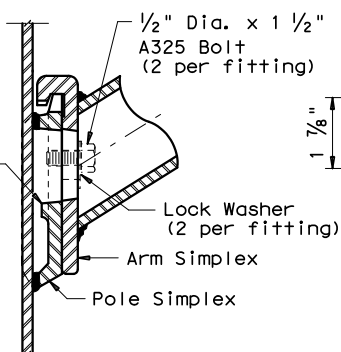


LOWER SIMPLEX FITTING

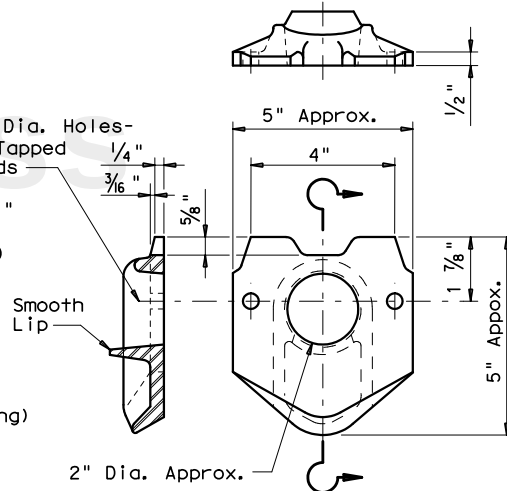


POLE SIMPLEX DETAIL

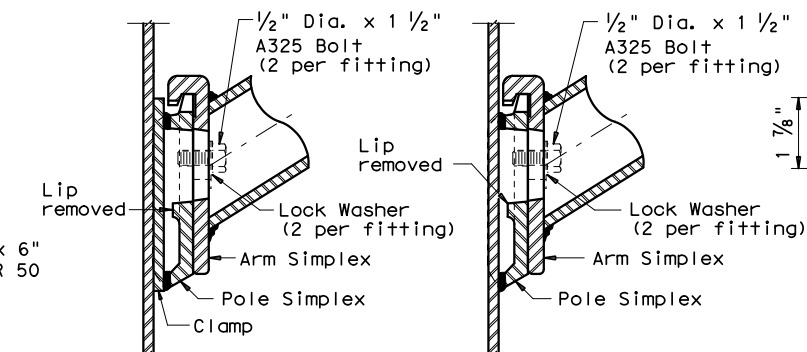

SECTION A-A

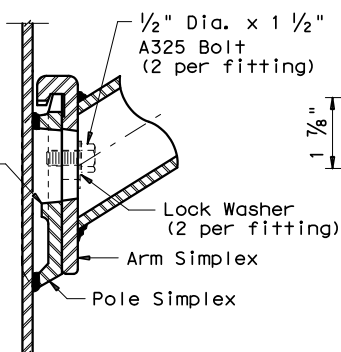

SECTION B-B

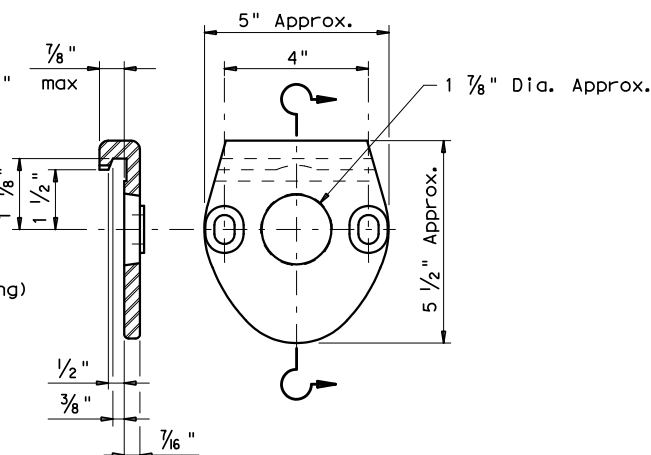

ARM SIMPLEX DETAIL

MATERIALS	
Pole or Arm Simplex	ASTM A27 Gr. 65-35 or A148 Gr. 80-50, A576 Gr. 1021 ③, or A36 (Arm only)
Arm Pipes	ASTM A53 Gr. B, A501, A1008 HSLAS-F Gr. 50 ④, or A1011 HSLAS-F Gr. 50 ④
Arm Strut Plates ②	ASTM A36, A572 Gr. 50 ④, or A588
Misc.	ASTM designations as noted

- ① Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- ② Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- ③ A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- ④ ASTM A572, A1008 HSLAS-F, and A1011 HSLAS-F may have higher yield strengths but shall not have less elongation than the grade indicated.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. Design Wind Speed equals 90 mph plus a 1.3 gust factor. Arms are designed to support a 60 lb. luminaire having an effective projected area (actual area times drag coefficient) of 1.6 sq. ft.

Materials and fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. In the absence of specified Fabrication tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.

Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing".

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

Each pole simplex fitting shall be supplied with 2 ASTM A325 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans. When clamp attachment is specified, the Fabricator shall ship the clamp assembly securely attached to the pole at the location shown on the plans.

If clamp assemblies are ordered without poles, the Fabricator shall ship one upper and one lower clamp assembly together in a single package, including all nuts and washers required for the clamps and simplex fittings.

Texas Department of Transportation
Traffic Operations Division

STANDARD ASSEMBLY
DRAWINGS FOR LUMINAIRE
SUPPORT STRUCTURES

ARM DETAILS

LUM-A-12

© TxDOT August 1995	DN: LEH	CK: JSY	DW: LTT	CK: TEB
5-96 1-99 1-12	REVISIONS	CONT	SECT	JOB
				HIGHWAY
				COUNTY
				SHEET NO.



 **Texas Department of Transportation**
Traffic Operations Division

CLAMP ON
FITTING ASSEMBLY FOR
LUMINAIRE MAST ARM

CFA-12


© TxDOT		DN: KAB		CK: RES		DW: FDN		CK: CAL	
REVISIONS 11-99 1-12		CONT		SECT		JOB		HIGHWAY	
		DIST		COUNTY				SHEET NO.	
								35	

[illegible]

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D ₁	‡			No.	Dia	No.	Dia
in.	in.	in.	in.	ea.	in.	ea.	in.
6.5	.179	12	6	4	1	2	5/8
7.5	.179	14	8	4	1	2	5/8
8.0	.179	14	8	4	1	2	5/8
9.0	.179	16	10	4	1	2	5/8
9.5	.179	18	12	4	1 1/4	3	5/8
9.5	.239	18	12	4	1 1/4	3	5/8
10.0	.239	18	12	4	1 1/4	3	5/8

[illegible]

ARM SIZE		A	F	T	CONN. BOLTS		PIN BOLTS	
D ₁	±				No.	Dia	No.	Dia
in.	in.	in.	in.	in.	ea.	in.	ea.	in.
7.0	.179	12	6	$\frac{3}{4}$	4	$\frac{3}{4}$	2	$\frac{5}{8}$
7.5	.179	14	8	$\frac{3}{4}$	4	$\frac{3}{4}$	2	$\frac{5}{8}$
8.0	.179	14	8	$\frac{3}{4}$	4	$\frac{3}{4}$	2	$\frac{5}{8}$
9.0	.179	16	10	$\frac{7}{8}$	4	1	2	$\frac{5}{8}$
10.0	.179	18	10	$\frac{7}{8}$	4	1	2	$\frac{5}{8}$
9.5	.239	18	10	1	6	1	3	$\frac{5}{8}$
10.0	.239	18	10	1	6	1	3	$\frac{5}{8}$

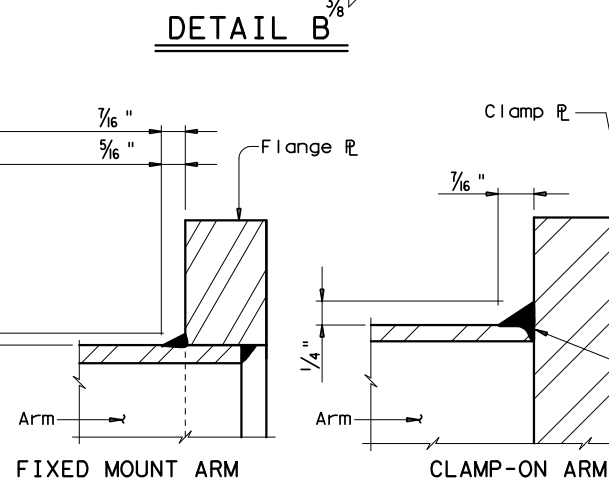

ARM SIZE		A	F	CONN. BOLTS		PIN BOLTS	
D ₁	†			No.	Dia	No.	Dia
in.	in.	in.	in.	ea.	in.	ea.	in.
6.5	.179	12	6	4	1	2	$\frac{5}{8}$
7.5	.179	14	8	4	1	2	$\frac{5}{8}$
8.0	.179	14	8	4	1	2	$\frac{5}{8}$
9.0	.179	16	10	4	1	2	$\frac{5}{8}$
9.5	.179	18	12	6	1	3	$\frac{5}{8}$
9.5	.239	18	12	6	1	3	$\frac{5}{8}$
10.0	.239	18	12	6	1	3	$\frac{5}{8}$


- ① ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.
- ② ASTM A1011 SS Gr.50 material shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.

Clamp-on details are used for the second arm on dual mast arm assemblies. A Maximum 1 1/2" wide vertical slotted hole shall be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1"

Where duplicate parts occur on a detail, welds shown for one part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces.

Pin bolts shall be A325 with threads excluded from the shear plane. Pin bolt and 3/4" dia pipe shall have 3/16" dia holes for a 1/8" dia galvanized cotter pin. Back clamp plate shall be furnished with a 3/4" dia hole for each pin bolt. An 11/16" dia hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.



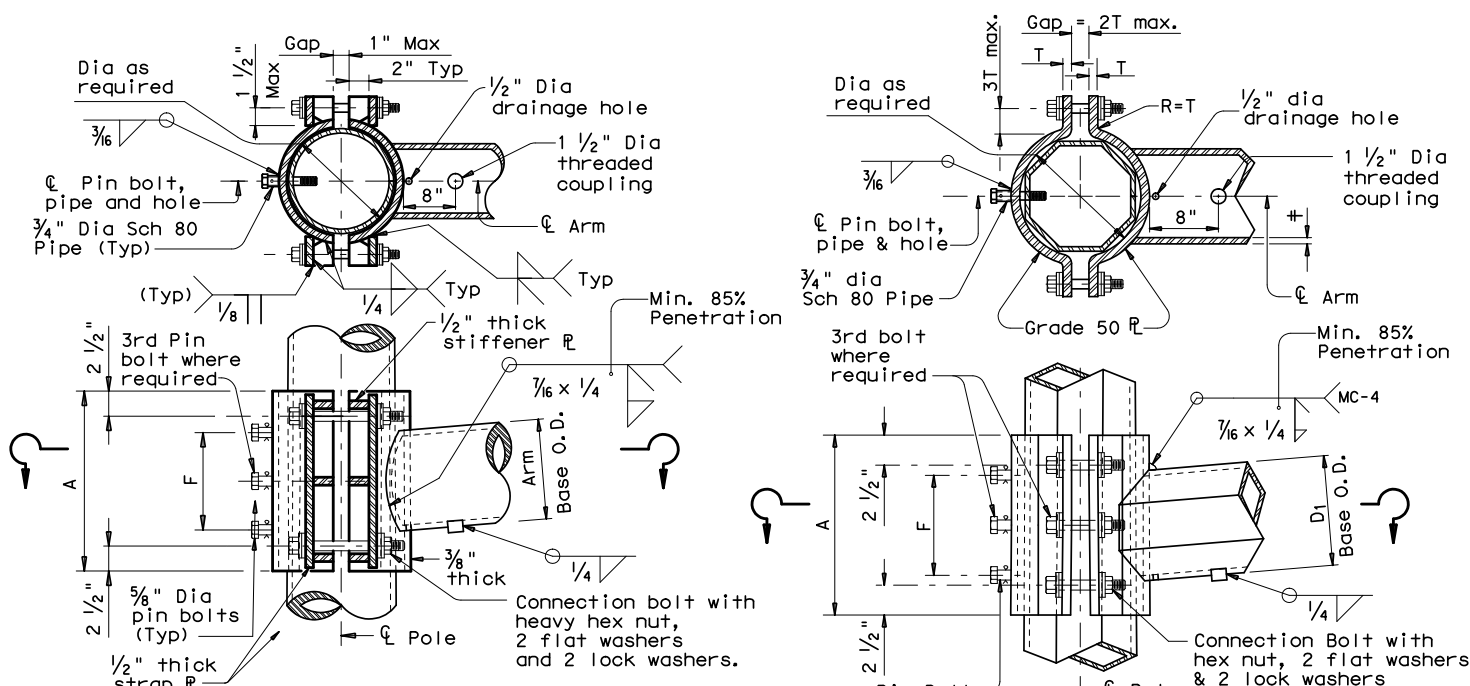


CLAMP-ON DETAIL 2


CLAMP-ON DETAIL 3

126A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

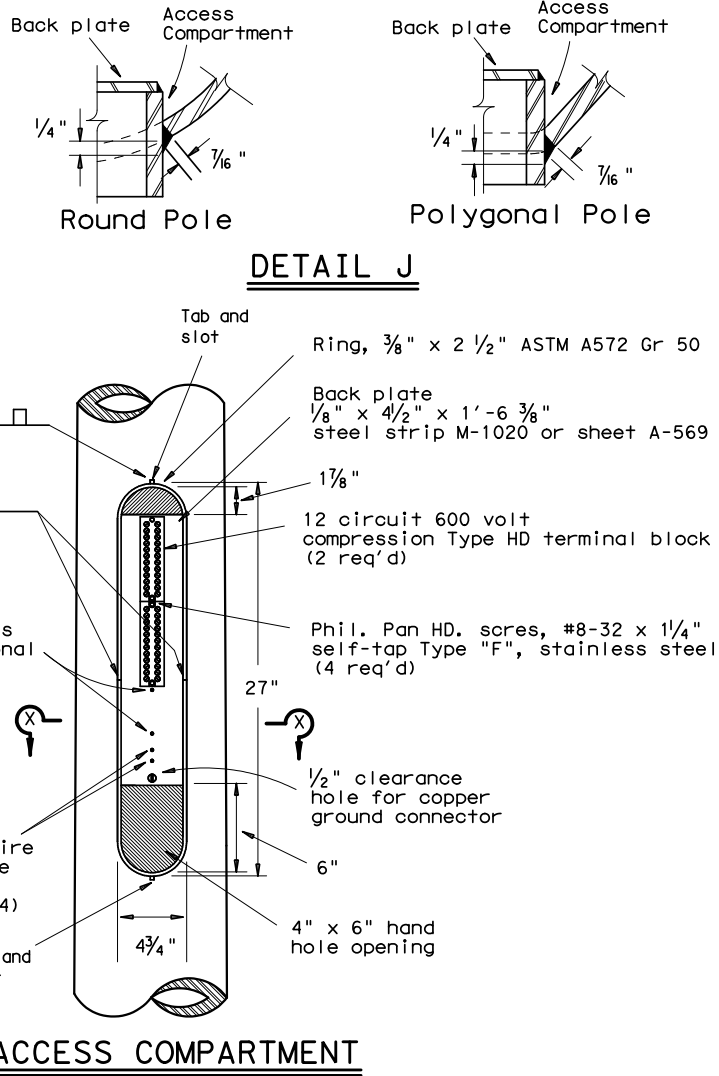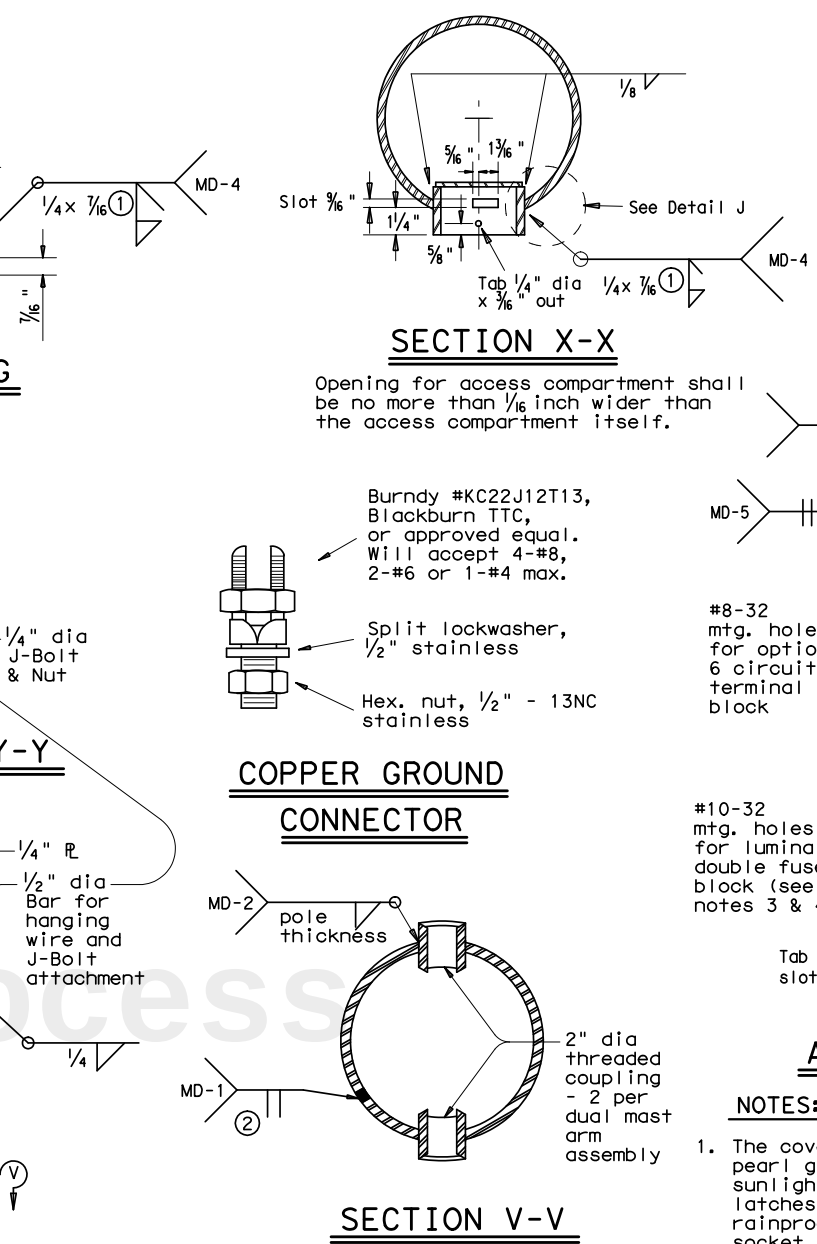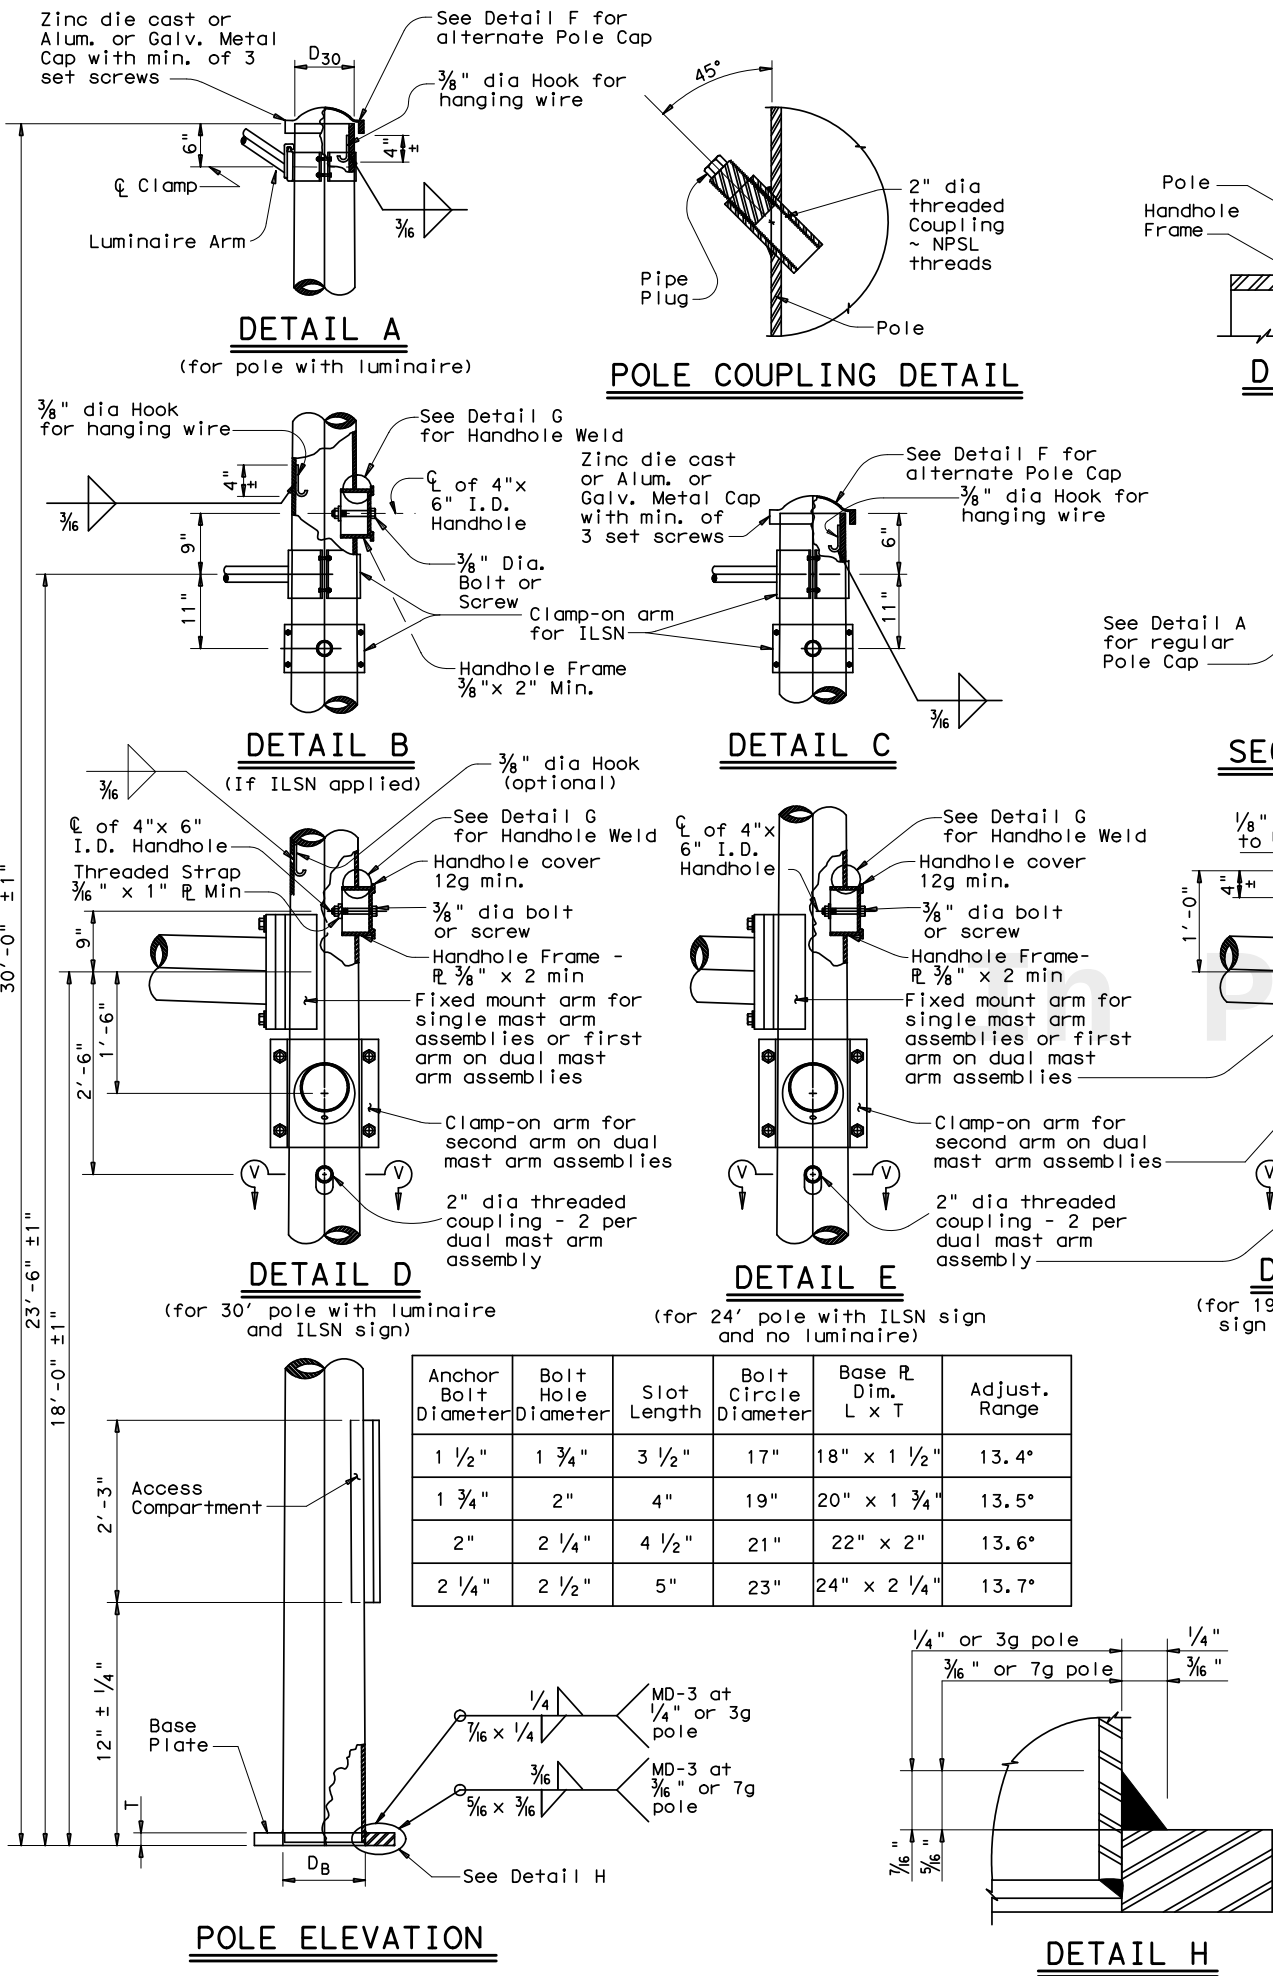

- NOTES:**
- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
 - The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4" self tapping type "F" stainless steel pan head screws, and one ground connector (Blackburn TTC, Burndy KC22J12T13, or Ilco SSS-5). The traffic signal contractor shall install the kit items in the field.
 - The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
 - Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

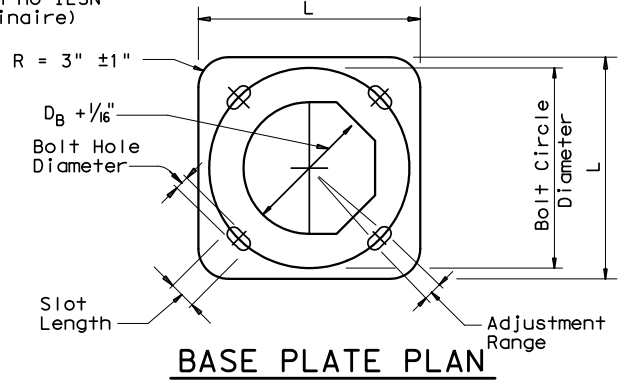

- 85% Min. penetration
- 60% Min. penetration
100% penetration within 6" of circumferential base welds.

Texas Department of Transportation
Traffic Operations Division


**TRAFFIC SIGNAL
SUPPORT STRUCTURES
MAST ARM POLE DETAILS**

MA-D-12



© TxDOT August 1995	DN: MS	CK: JSY	DW: FDN	CK: CAL
REVISIONS	CONT	SECT	JOB	HIGHWAY
8-99 1-12				
	DIST	COUNTY		SHEET NO.
				37

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

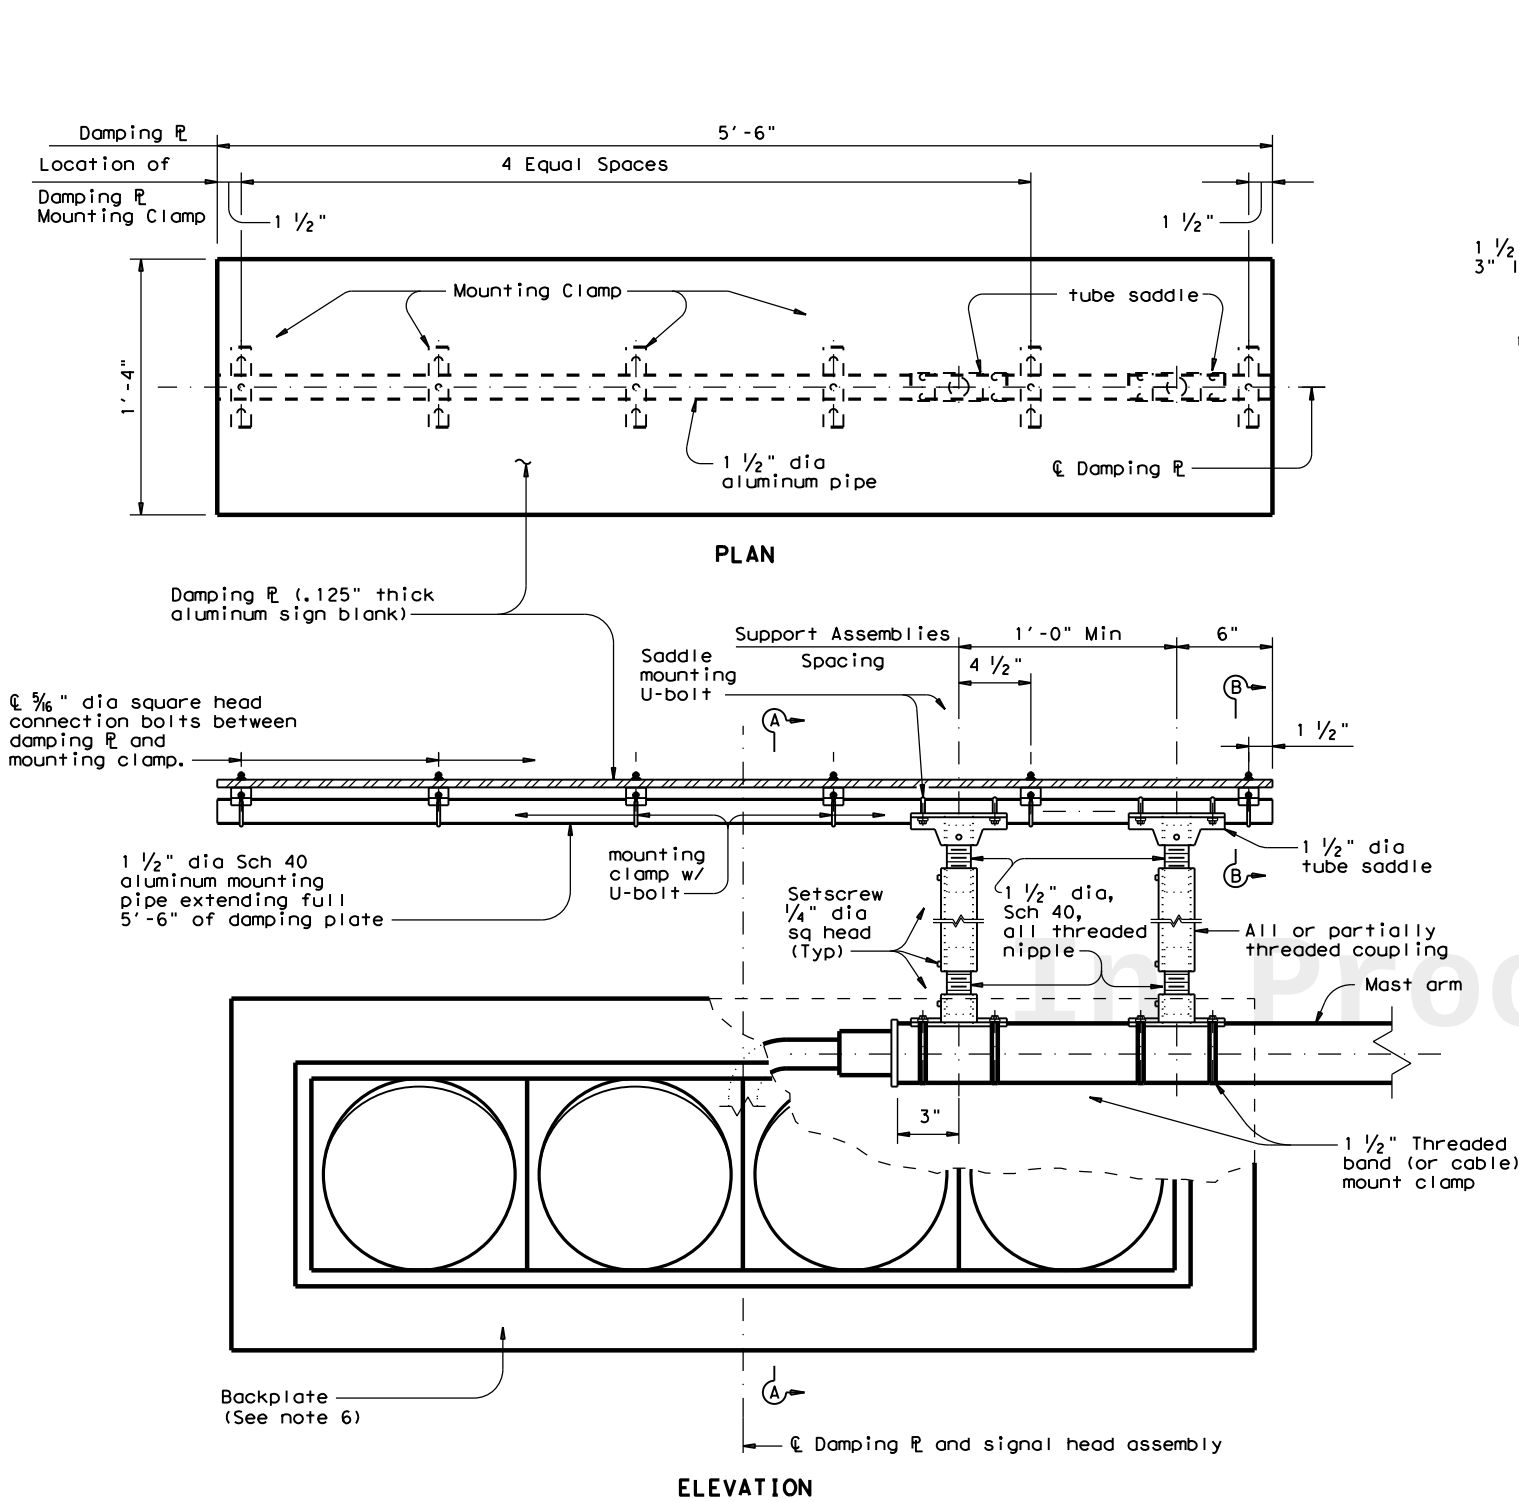


DAMPING PLATE MOUNTING DETAILS
(Showing alternate placement of signal head)

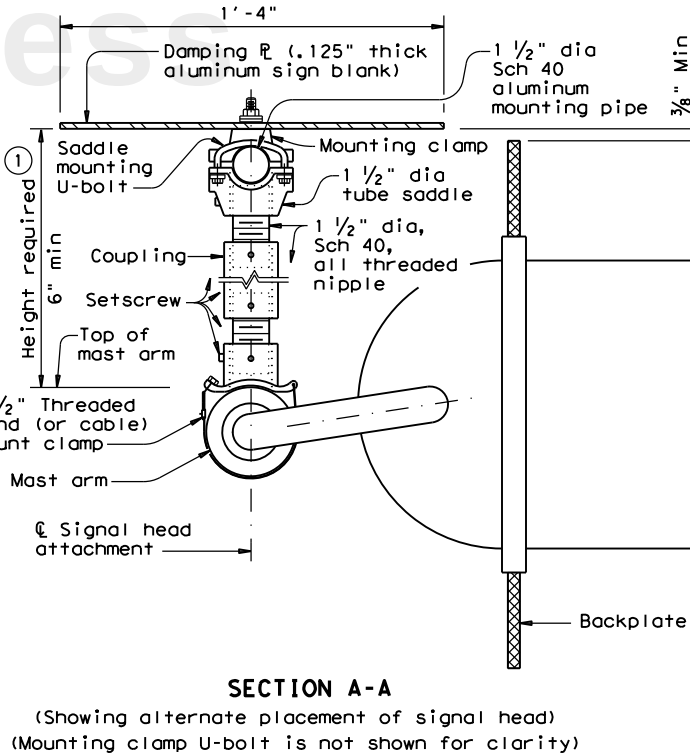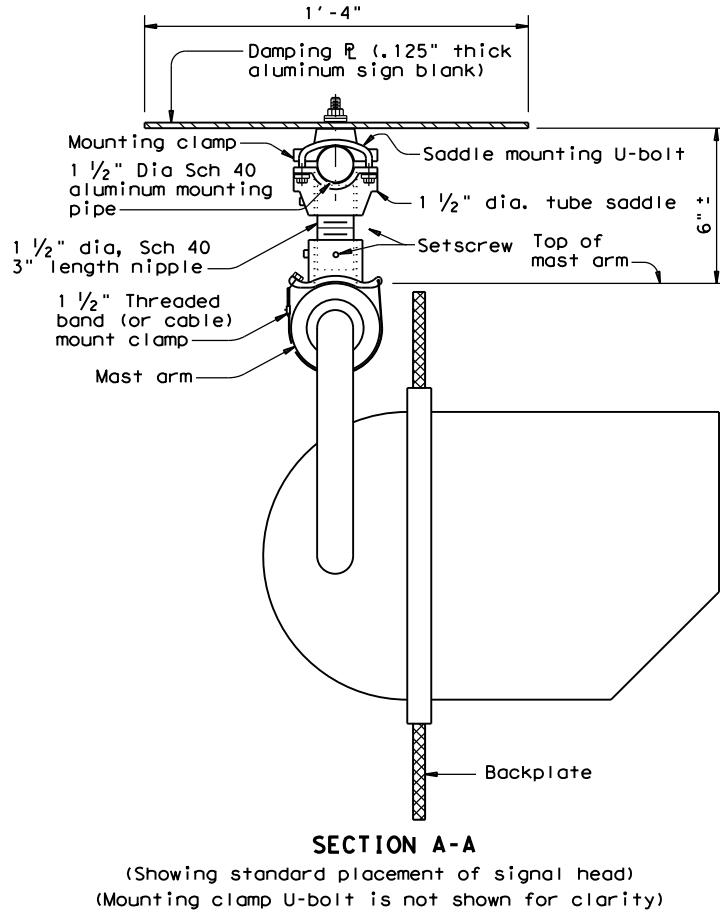

① Recommended supporting assemblies to achieve required height for horizontal section heads			
Height required	One nipple each length	Two nipples each length plus	One coupling each length
6"-6 3/4"	3"	-	-
7"-8 1/2"	4"	-	-
9"-10 1/2"	6"	-	-
11"-15 1/2"	-	4"	5"
16"-24"	-	6"	10"

GENERAL NOTES:

1. In accordance with the findings of TxDOT sponsored research, the installation of a damping plate in accordance with the details shown here at the end of signal mast arms of SMA and DMA standard structures reduces excessive harmonic vertical vibration, and thus fatigue damage. Any deviation from these details may reduce the effectiveness of this damping device.
2. Aluminum sign blank for damping plate will conform to Departmental Material Specifications DMS-7110. Materials for mast arm mounting clamp and tube saddle will be aluminum castings or aluminum alloys as in accordance with manufacturers' stipulations. Mounting pipe, pipe nipple and coupling will be aluminum alloy 6061-T6 or 6063-T6. Damping plate mounting clamp and U-bolt assemblies will conform to Standard sheet SMD(GEN). U-bolts for saddle mounting will have a minimum yield strength of 36 ksi.
3. Damping plate will be mounted horizontally. Position centerline of damping plate to align with centerline of mast arm or horizontal signal head assembly. Vertical clearance between signal head (with or without backing plate) and bottom of damping plate will be maintained as shown. The attachments shown here are examples only, other supporting details which meet both alignment and vertical clearance requirements are also acceptable.
4. Unless stipulated by the manufacturers, all steel parts will be galvanized finish in accordance with Standard Specification Item 445, "Galvanizing".
5. Contractor will verify applicable field dimensions before the installation.
6. Backplates are optional for traffic signals. When backplates are used, Backplates will have a 2-inch fluorescent yellow AASHTO Type B_{FL} or C_{FL} retroreflective border conforming to TxDOT DMS-8300 "Sign Face Materials." See Sheet TS-BP-20 for backplate details.

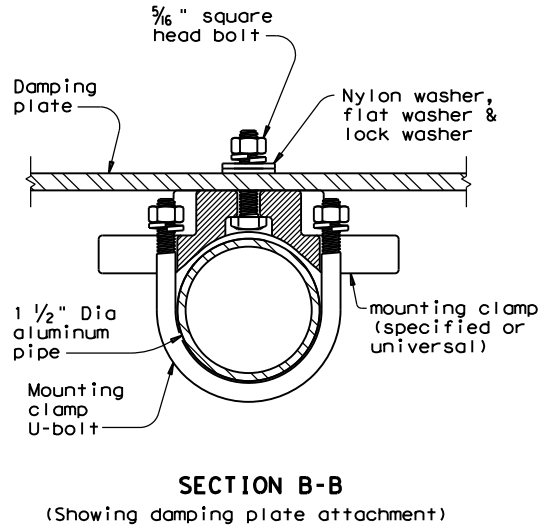



Texas Department of Transportation

Traffic Safety Division Standard

MAST ARM DAMPING PLATE DETAILS

MA-DPD-20

FILE: ma-dpd-20.dgn DN: TxDOT CK: TxDOT DW: TxDOT CK: TxDOT


© TxDOT January 2012 CONT SECT JOB HIGHWAY

6-20 REVISIONS DIST COUNTY SHEET NO.


38

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

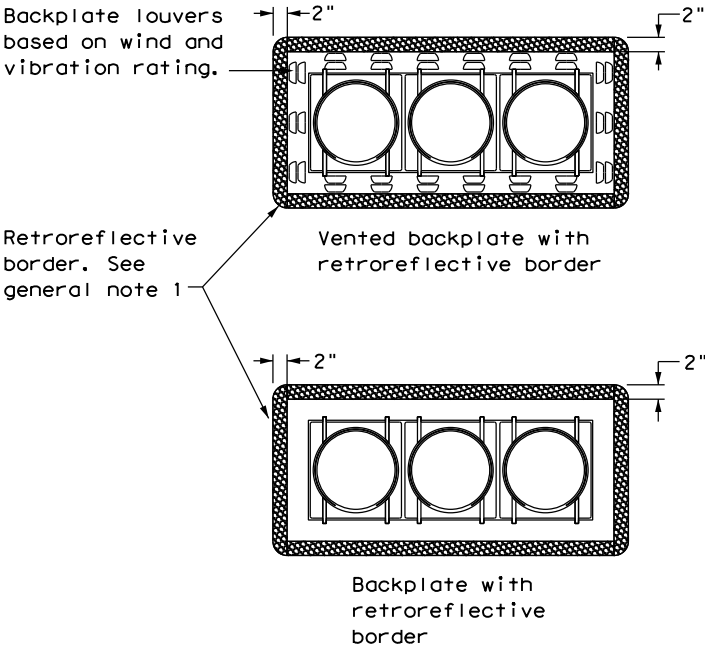


THREE-SECTION HEAD
HORIZONTAL OR VERTICAL

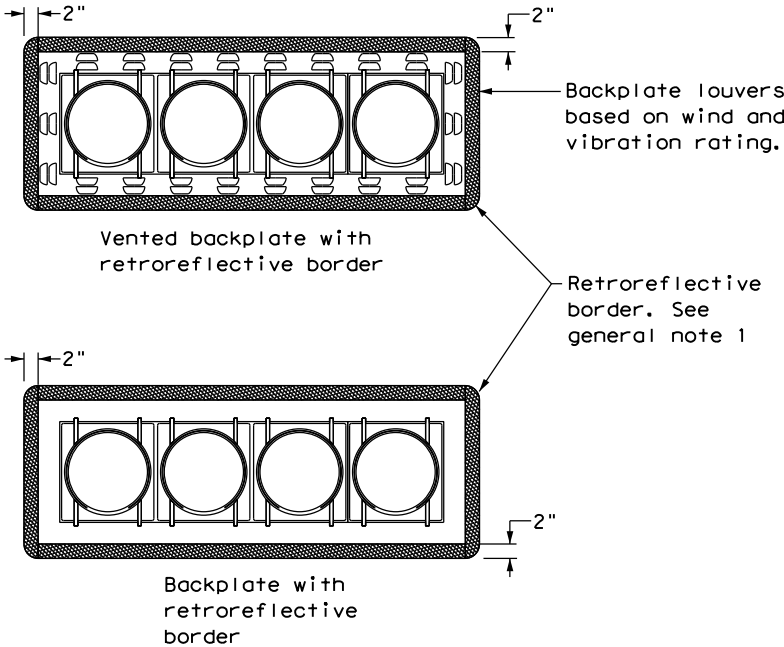


FOUR-SECTION HEAD
HORIZONTAL OR VERTICAL

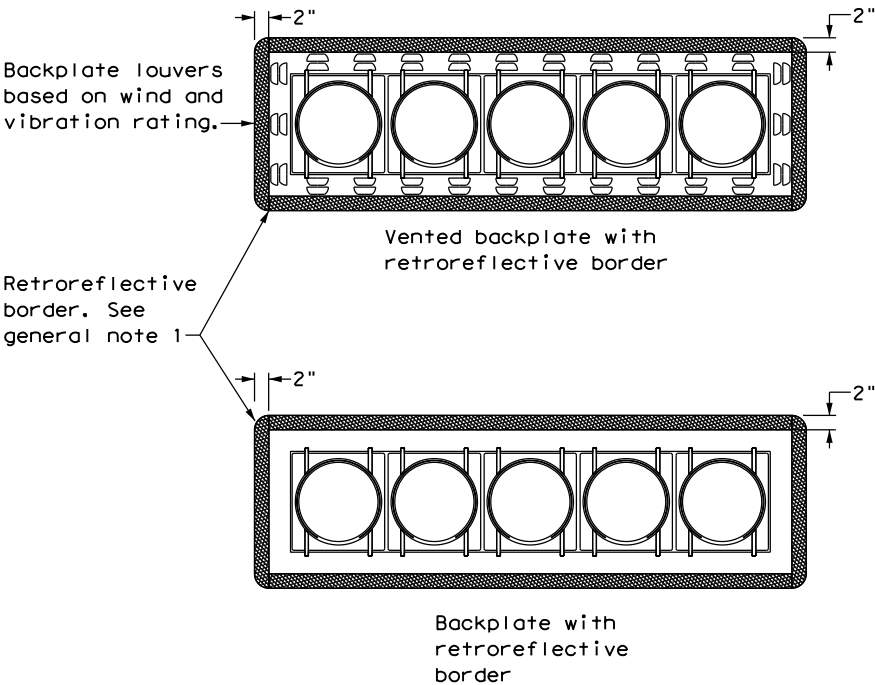

FIVE-SECTION HEAD
HORIZONTAL OR VERTICAL

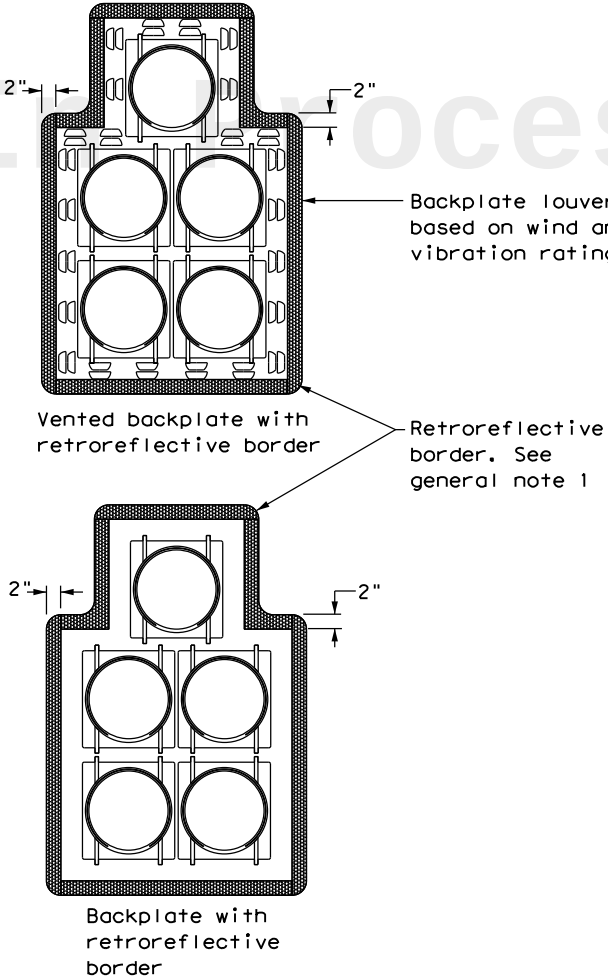

FIVE-SECTION HEAD
CLUSTER

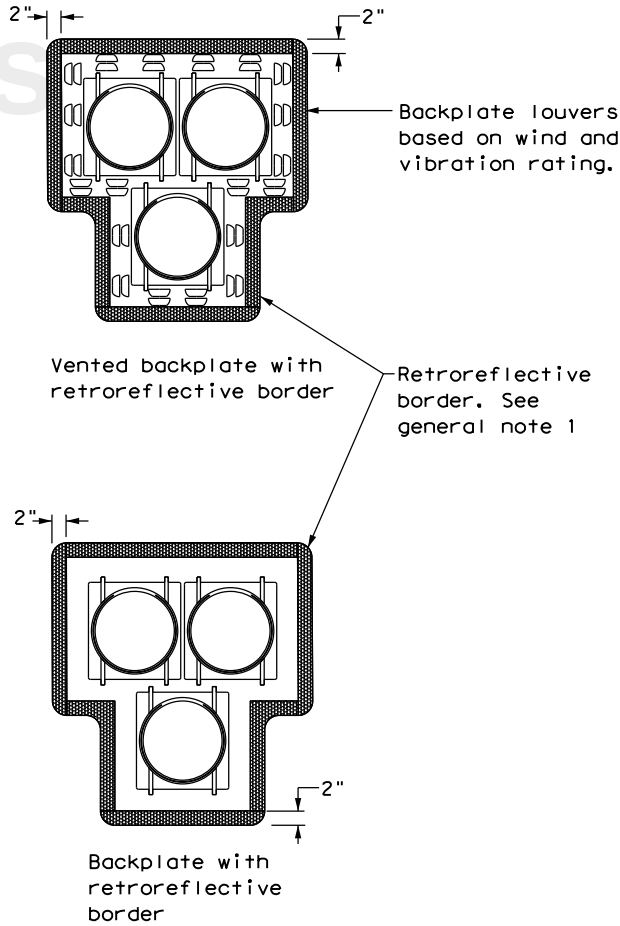

PEDESTRIAN HYBRID
BEACON

GENERAL NOTES:

1. Backplates are optional for traffic signals and pedestrian hybrid beacons. When backplates are used, a 2-inch wide fluorescent yellow AASHTO Type B_{FL} or C_{FL} retroreflective border conforming to TxDOT DMS-8300 is required. Place on all approaches when used.
2. Signal head and backplate compatibility must be verified by the contractor prior to installation.
3. When using backplates on signal heads, venting is preferred to reduce cyclic vibration stress.
4. When a vented backplate is used, the retroreflective border must not be placed over the louvers.
5. This standard sheet applies to all signal heads with backplates, including but not limited to:
 - Pole mounted
 - Overhead mounted
 - Span wire mounted
 - Mast arm mounted
 - Vertical signal heads
 - Horizontal signal heads
 - Clustered signal heads
 - Pedestrian hybrid beacons





Texas Department of Transportation

Traffic Safety Division Standard



**TRAFFIC SIGNAL
HEAD WITH
BACKPLATE
TS-BP-20**

FILE: ts-bp-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT June 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	DIST	COUNTY	SHEET NO.	
			39	

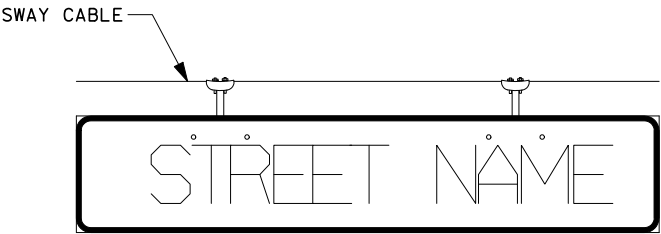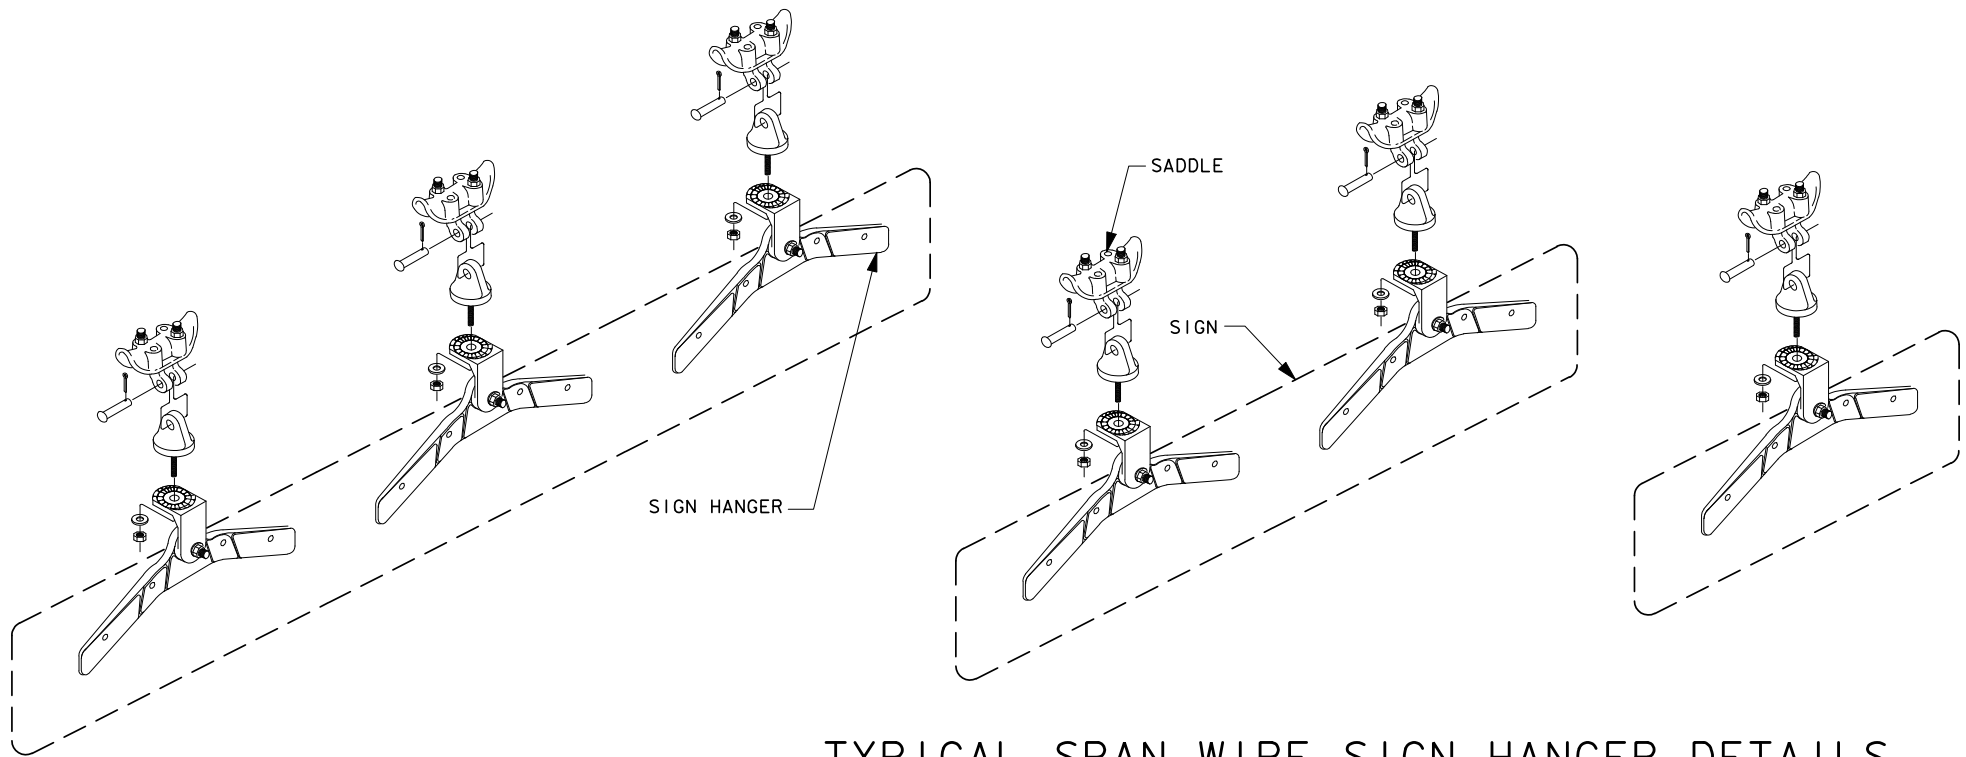



1. USE PELCO PARTS OR APPROVED EQUAL.
2. FURNISH HARDWARE FOR A COMPLETE INSTALLATION.
3. ATTACH THE 90* SPAN WIRE CLAMPS (SADDLES) TO TETHERS (SWAY CABLES).
4. FURNISH 1 ADJUSTABLE FREE SWINGING SIGN HANGER PER STREET NAME SIGN SMALLER THAN 3 FT. - 0 IN. SIGNS 3 FT - 0 IN. TO 6 FT.- 0 IN. REQUIRE 2 HANGERS. SIGNS LARGER THAN 6 FT. - 0 IN. REQUIRE 3 HANGERS.

TYPICAL SPAN WIRE SIGN HANGER DETAILS

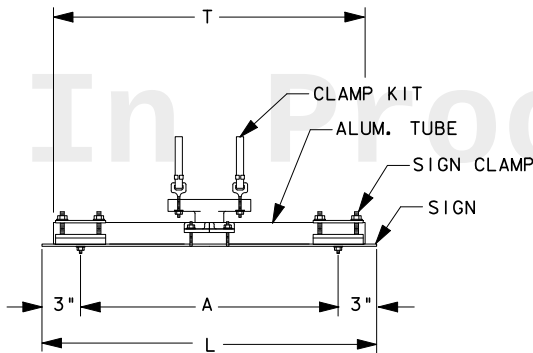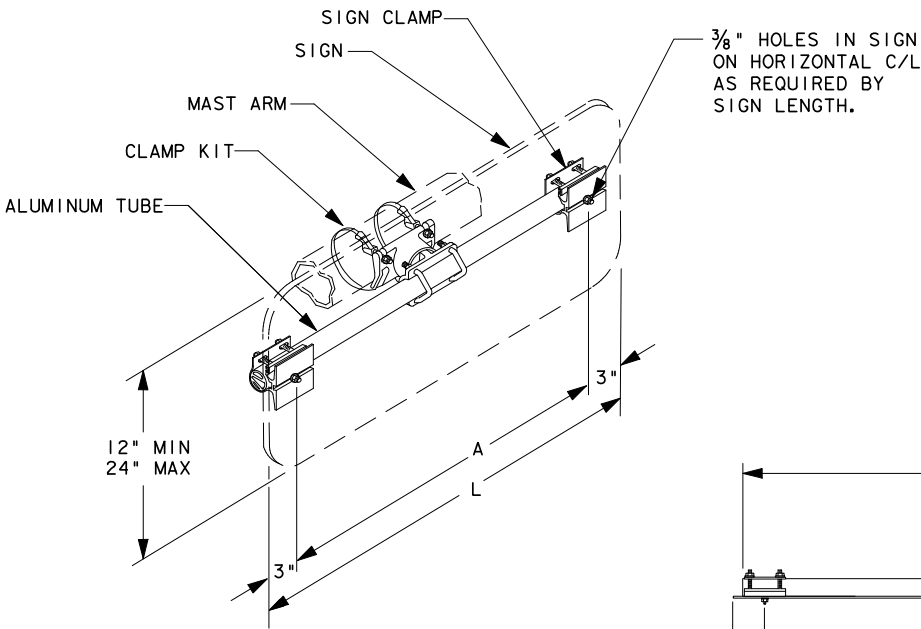

SIGNS (1'-6" to 3'-0" Long)

SIGN LENGTH (L)	TUBE LENGTH (T)	A
1'-6"	16"	12"
2'-0"	22"	18"
2'-6"	28"	24"
3'-0"	34"	30"

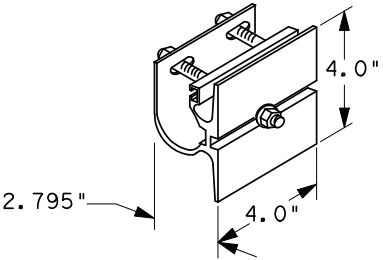

GUSSETED TUBE CROSS SECTION


SIGN CLAMP DETAIL

SIGNS (3'-6" to 8'-0" Long)

SIGN LENGTH (L)	TUBE LENGTH (T)	A
3'-6"	40"	12"
4'-0"	46"	14"
4'-6"	52"	16"
5'-0"	58"	18"
5'-6"	64"	20"
6'-0"	70"	22"
6'-6"	76"	24"
7'-0"	82"	26"
7'-6"	88"	28"
8'-0"	94"	30"

SIGNS (8'-6" to 10'-0" Long)

SIGN LENGTH (L)	TUBE LENGTH (T)	A	B
8'-6"	100"	19"	20"
9'-0"	106"	20"	22"
9'-6"	112"	21"	24"
10'-0"	118"	22"	26"

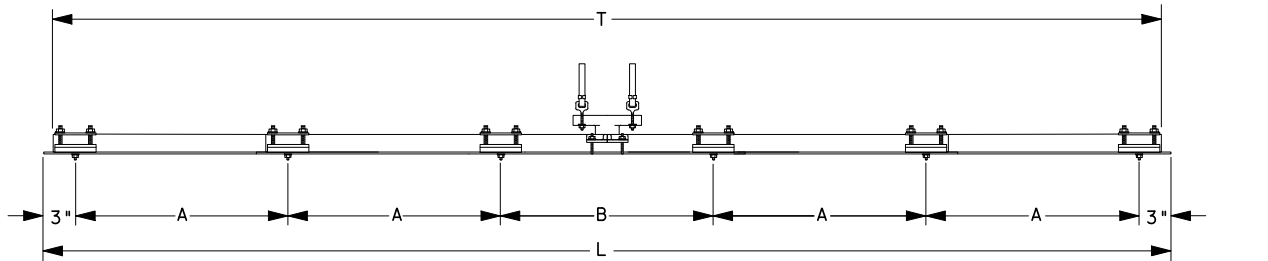

TYPICAL MAST ARM SIGN MOUNT DETAILS


FILE: Overhead-Sign-mount-det-sp04.dgn



Texas Department of Transportation
Houston District

SIGNAL DETAILS/STANDARDS
OVERHEAD STREET NAME SIGN
MOUNTING DETAILS
OSNS/MD

© TxDOT 2004	DN#	CK#	DW#	CK#
	DIST	FED REG	PROJECT NO.	SHEET
	HOU	6		40
	COUNTY	CONTROL	SECT	JOB
				HIGHWAY

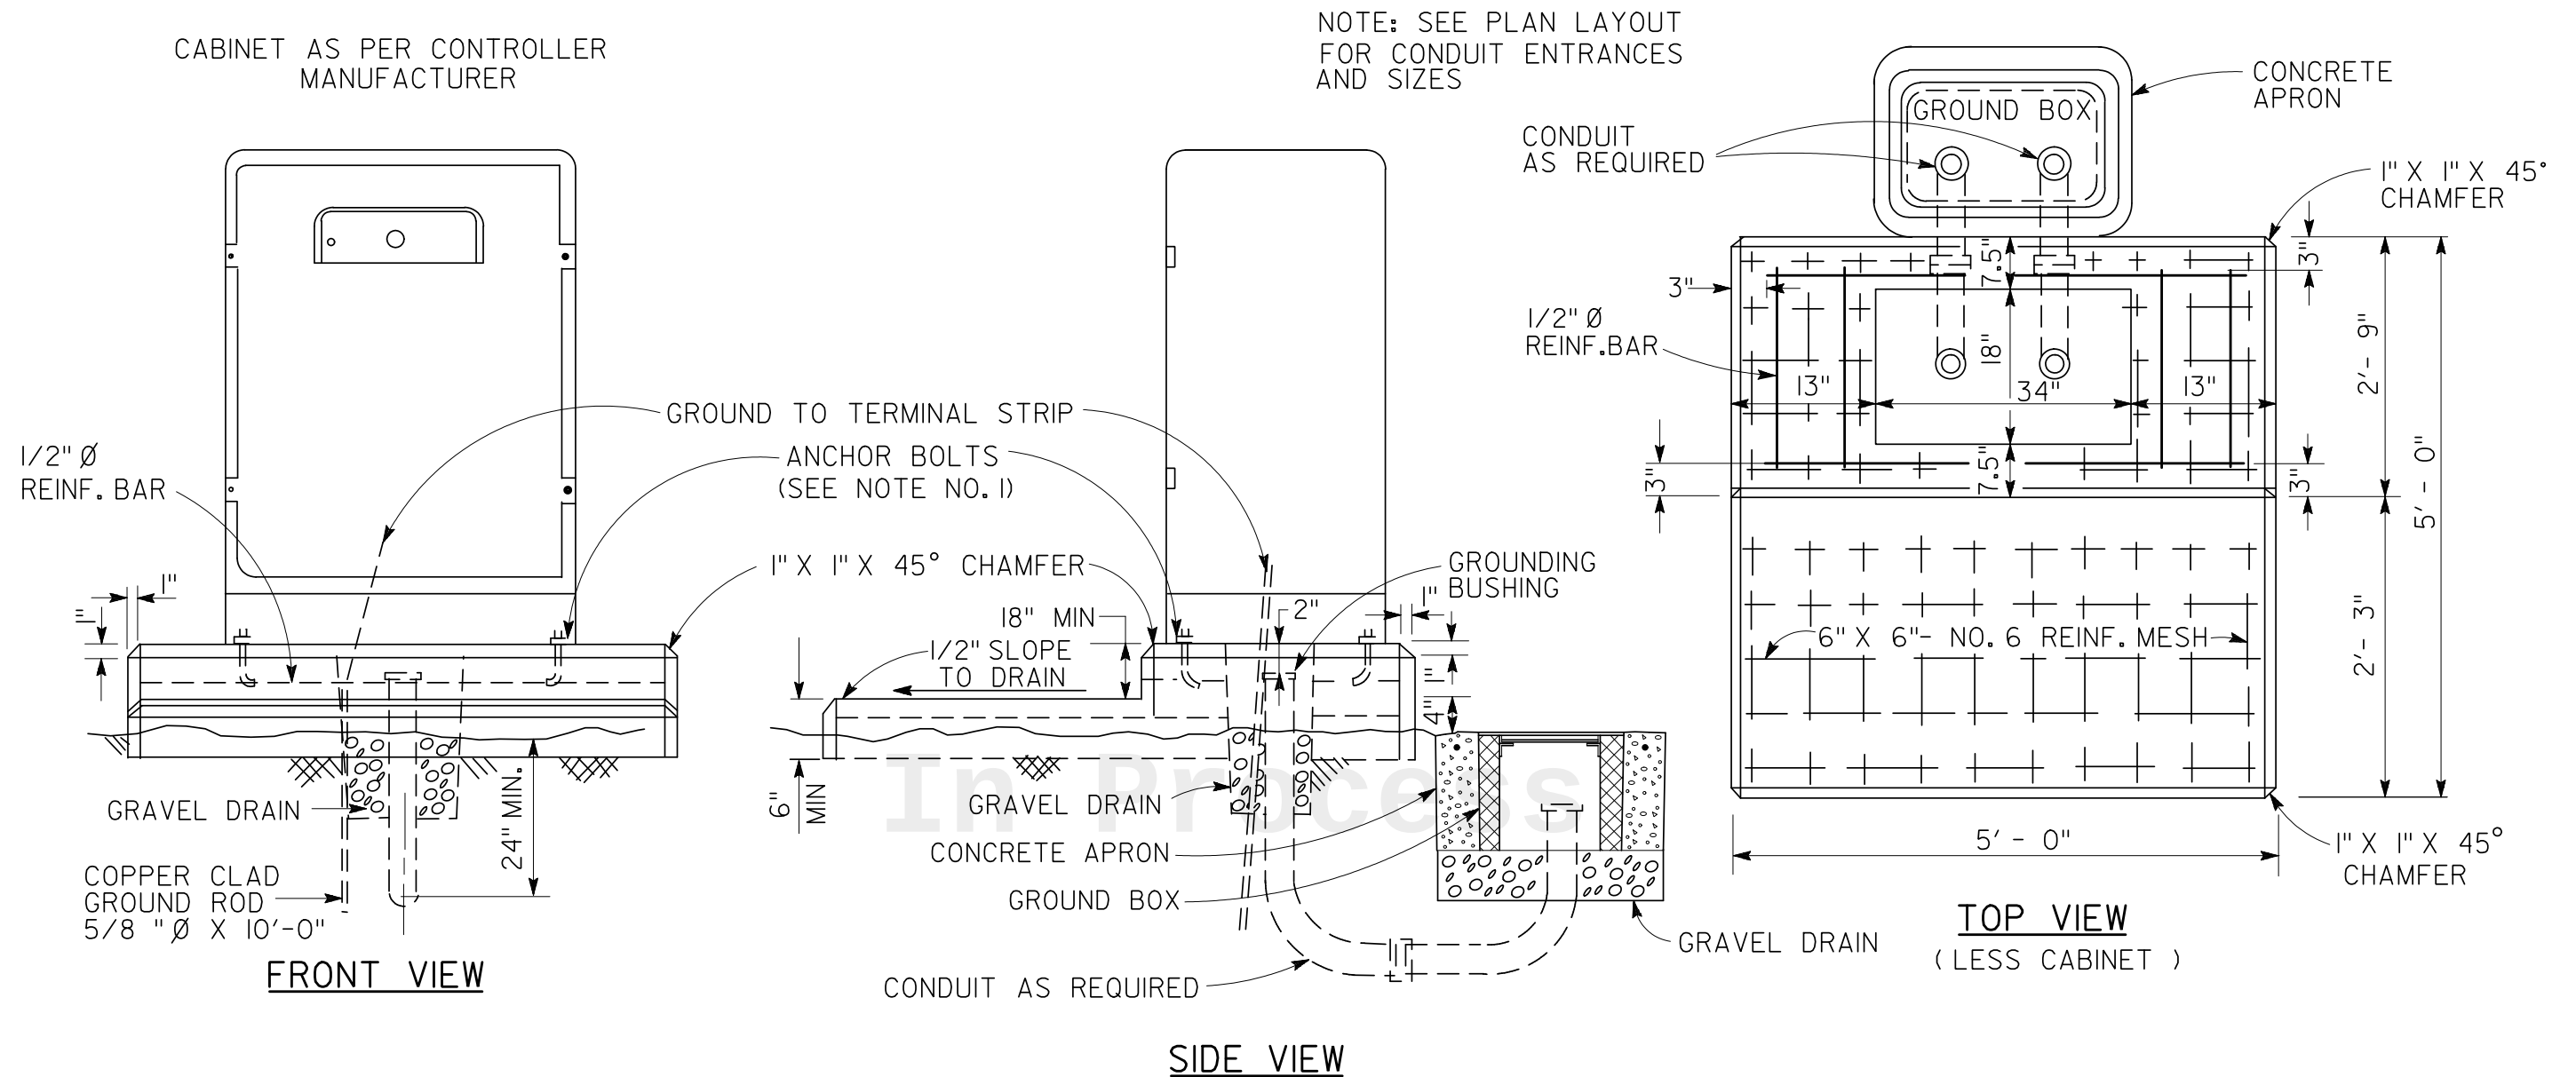

NOTES:

- CABINET MANUFACTURER TO PROVIDE DETAILS OF ANCHOR BOLT LOCATION.
- MODIFY DIMENSIONS FOR CONCRETE BASE TO FIT EQUIPMENT FURNISHED, IF NECESSARY.
- PROVIDE GRAVEL DRAIN FOR CONTROLLER AND ALL GROUND BOXES.
- FURNISH CLASS "B" OR CLASS "C" CONCRETE.
- SET CONTROLLER FOUNDATION LEVEL WITH THE PAVEMENT SURFACE OR AS APPROVED BY THE ENGINEER.
- FURNISH AT NO COST TO THE DEPARTMENT ANY ADDITIONAL CONCRETE WHICH MAY BE NECESSARY TO STABILIZE THE FOUNDATION AT UNUSUAL LOCATIONS.
- PLACE REINFORCING BARS AS DIRECTED.
- UPON INSTALLING THE CONTROLLER CABINET, APPLY A SILICON-BASED CAULKING COMPOUND AROUND THE BASE OF THE CONTROLLER CABINET.



SIGNAL DETAILS/STANDARDS
CONTROLLER FOUNDATION
DETAIL
SD/SCFD

FILE#	DN#	CK#	DW#	CK#
© TxDOT 2007	DIST	FED REG	PROJECT NO.	SHEET
REVISIONS 08-04 03-07	HOU	6		41
	COUNTY	CONTROL	SECT	JOB
				HIGHWAY

(Descriptive Codes correspond to project estimate and quantities sheets)

Post Type _____

FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
TWT = Thin-Walled Tubing (see SMD(TWT))
10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)

Anchor Type

UA = Universal Anchor - Concreted (see SMD (FRP) and (TWT))

UB = Universal Anchor - Bolted down (see SMD (FRP) and (TWT))

WS = Wedge Anchor Steel - (see SMD (TWT))

WP = Wedge Anchor Plastic (see SMD (TWT))

SA = Slipbase - Concreted (see SMD (SLIP-1) to (SLIP-3))

SB = Slipbase - Bolted Down (see SMD (SLIP-1) to (SLIP-3))

Sign Mounting Designation

P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
IF REQUIRED
1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))

Diagram illustrating the non-breakaway portion of support (i.e., stub) dimensions. The diagram shows a vehicle's rear end with a license plate reading "TX-001". The non-breakaway portion is indicated by a dashed line and labeled "Non-breakaway portion of support (i.e., stub)". The distance from the ground surface to the top of the non-breakaway portion is labeled "4\" max.". The total length of the non-breakaway portion is labeled "60\"". The ground surface is labeled "Ground Surface".

To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).

PAVED SHOULDERS

This diagram shows a diamond-shaped sign with the text "HIGHWAY INTERSECTION AHEAD". The sign is positioned on a shoulder that is less than 6 feet wide. The distance from the centerline of the travel lane to the center of the sign is 12 feet minimum. The distance from the edge of the paved shoulder to the center of the sign is 0 to 6 feet. The sign is 7.5 feet maximum and 7.0 feet minimum high.

LESS THAN 6 FT. WIDE

This diagram shows a diamond-shaped sign with the text "HIGHWAY INTERSECTION AHEAD". The sign is positioned on a shoulder that is greater than 6 feet wide. The distance from the centerline of the travel lane to the center of the sign is 6 feet minimum. The distance from the edge of the paved shoulder to the center of the sign is greater than 6 feet. The sign is 7.5 feet maximum and 7.0 feet minimum high.

GREATER THAN 6 FT. WIDE

When the shoulder is 6 ft. or less in width, the sign must be placed at least 12 ft. from the edge of the travel lane.

When the shoulder is greater than 6 ft in width, the sign must be placed at least 6 ft. from the edge of the shoulder.

The diagram illustrates the cross-section of a two-lane highway. At the top, a schematic shows a central travel lane with a double-headed arrow, flanked by two hatched areas representing shoulders. Below this, a detailed cross-section shows the 'Travel Lane' with a width of '12 ft min'. To the right of the travel lane is a 'Paved Shoulder' with a width of '6 ft min'. The total width of the paved area is indicated as '7.5 ft max' and '7.0 ft min'.

When this sign is needed at the end of a two-lane, two way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.

No more than 2 sign posts should be located within a 7 ft. circle.

Acceptable

Not Acceptable

Not Acceptable

Not Acceptable

The image contains two technical diagrams illustrating different methods for mounting sign panels to a sign post.

Single Signs: This diagram shows a side view of a sign panel being mounted to a central sign post. A U-bolt is used to clamp the sign panel to the post. The components labeled are: U-bolt, Sign Post, Sign Clamp, Nut, lock washer, Nylon washer, flat washer, lock washer, nut, and Sign Panel.

Back-to-Back Signs: This diagram shows a front view of two sign panels mounted back-to-back on a central sign post. The sign panels are held together by sign clamps, which are secured with clamp bolts. The components labeled are: Nylon washer, flat washer, lock washer, nut, Sign Panel, Nut, lock washer, Sign Post, Sign Clamp, Clamp Bolt, Sign Bolt, and Sign Panel.

bolts used to mount sign panels to the clamp are 1/2 inch diameter, 16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.

Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

7.5 ft max
7.0 ft min *

Travel Lane

Paved Shoulder

LOW CLEARANCE

14 FT 4 IN

35 M.P.H.

EAST FARM ROAD 3713

EAST FARM ROAD 3713

316

When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

A diagram showing the placement of a diamond-shaped sign that reads "HIGHWAY INTERSECTION AHEAD". The sign is mounted on a post. Two vertical dimension lines indicate the distance from the "Face of Curb" on both sides of the road to the center of the sign. Each distance is labeled "2 ft min". Another vertical dimension line indicates the height of the sign above the road surface, with a range of "7.5 ft max" and "7.0 ft min *".

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

* Signs shall be mounted using the following condition that results in the greatest sign elevation:

- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:
<http://www.txdot.gov/publications/traffic.htm>

SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
GENERAL NOTES & DETAILS

SMD (GEN) - 08

© TxDOT July 2002		DN: TxDOT		CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISONS	CONT	SECT	JOB		HIGHWAY
		DIST	COUNTY			SHEET NO.
						42

NOTE







 **Texas Department of Transportation**
Traffic Operations Division

SMD (SLIP-1) -08








© TxDOT July 2002		DN: TXDOT		CK: TXDOT		DW: TXDOT		CK: TXDOT	
9-08	REVISIONS	CONT	SECT	JOB			HIGHWAY		
		DIST	COUNTY					SHEET NO.	
									43

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

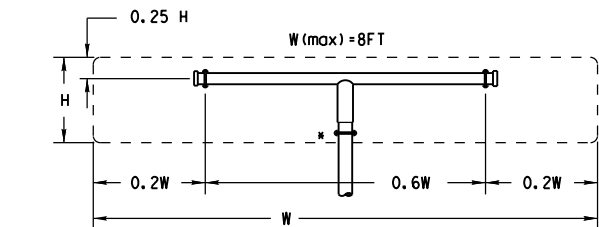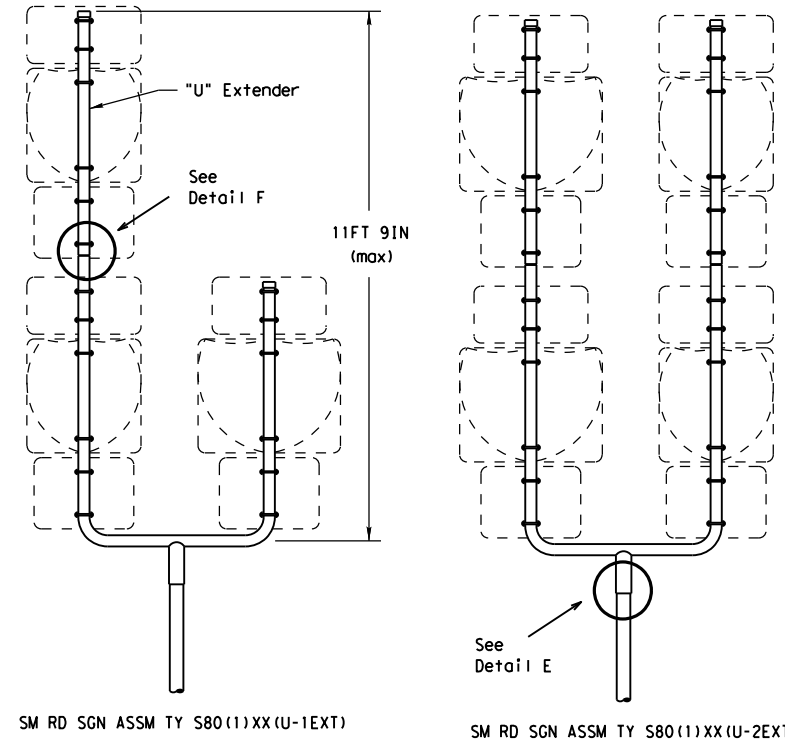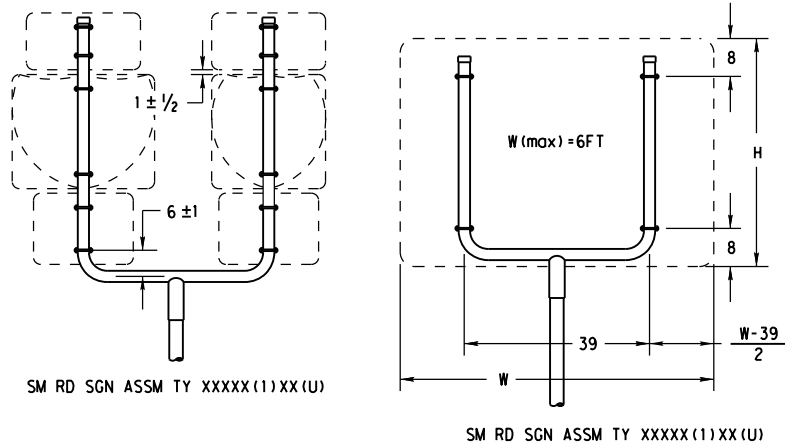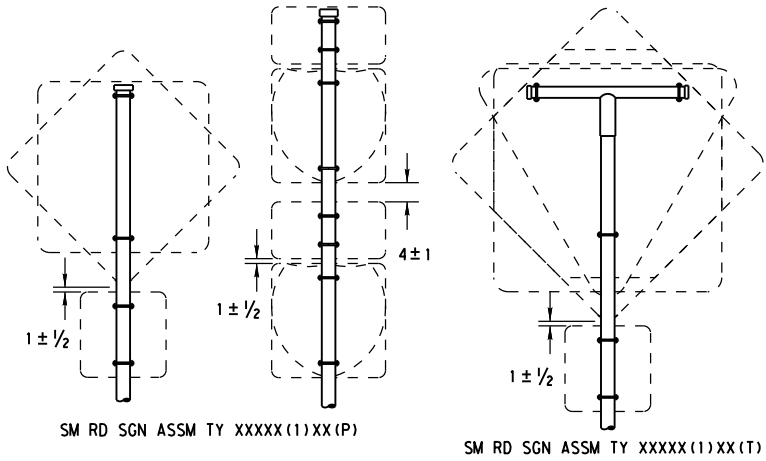

All dimensions are in english unless detailed otherwise.

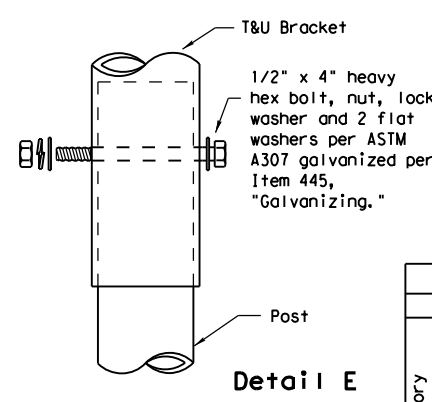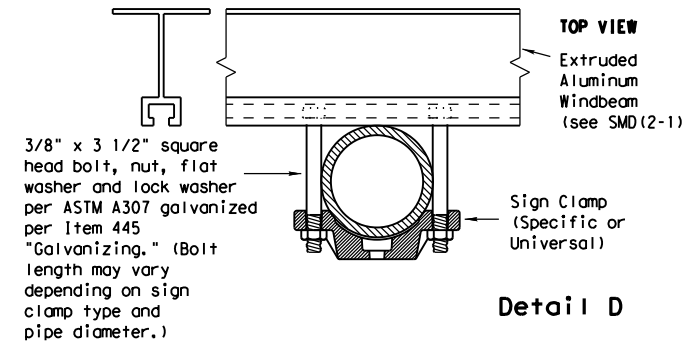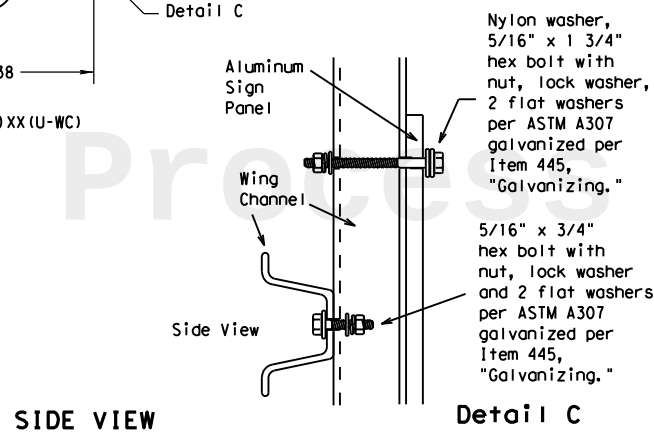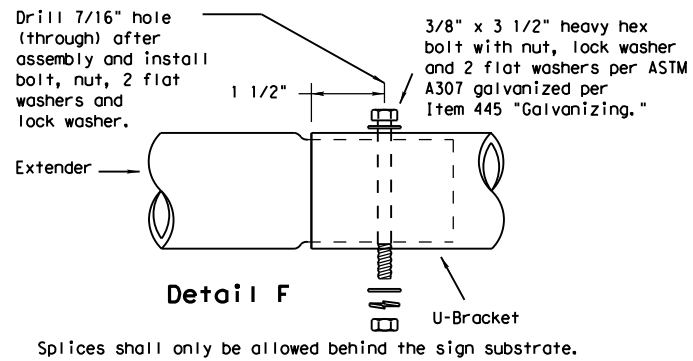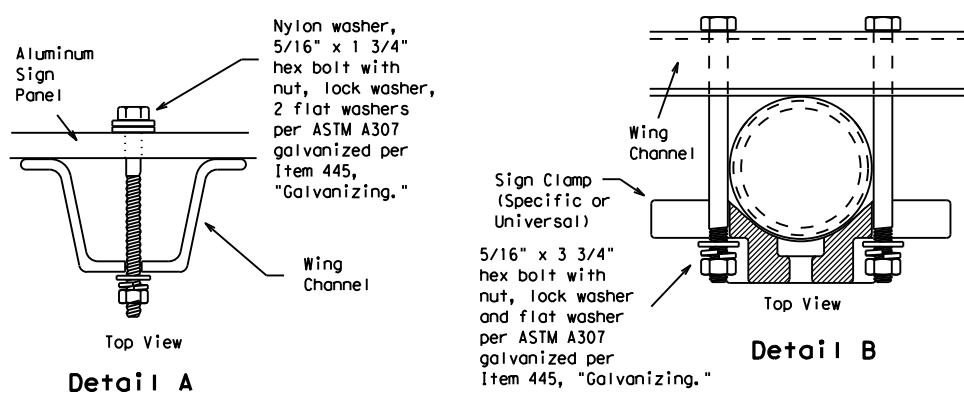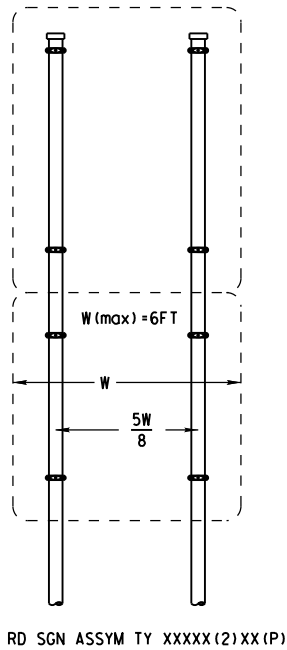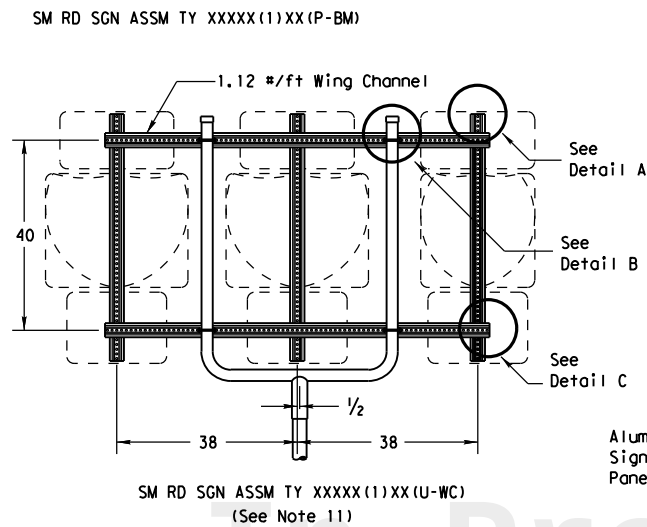

FRICION CAP DETAIL

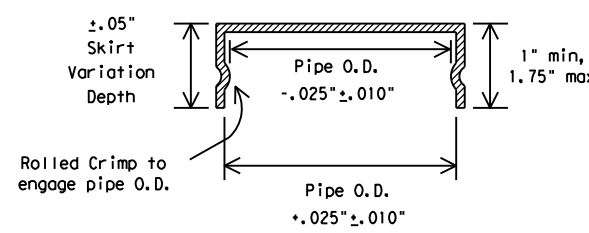

Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes.

The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture.

Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT		
Regulatory	SIGN DESCRIPTION	SUPPORT
	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
Warning	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
Warning	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
Warning	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
Warning	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
Warning	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)












SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM SMD(SLIP-2)-08

© TxDOT July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB
				HIGHWAY
		DIST		COUNTY
				SHEET NO.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

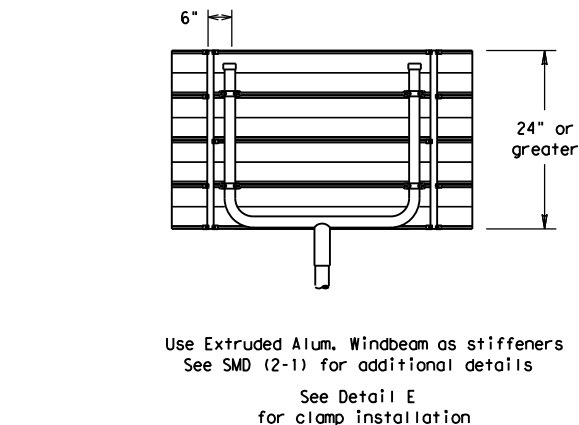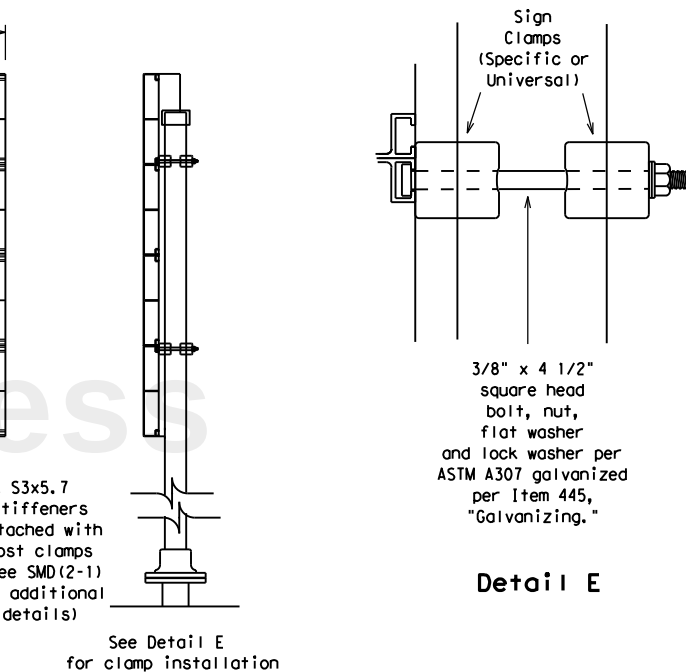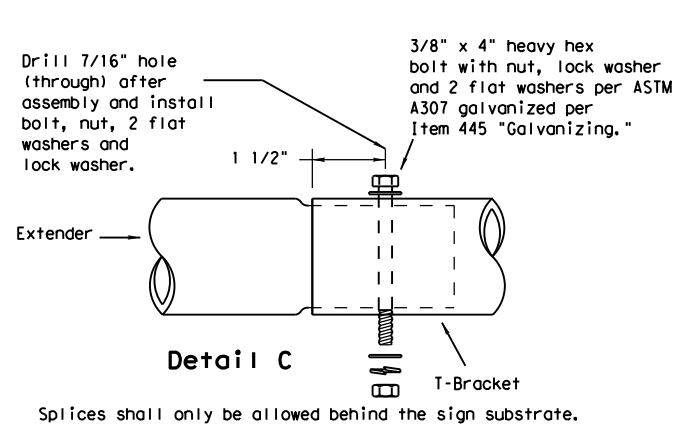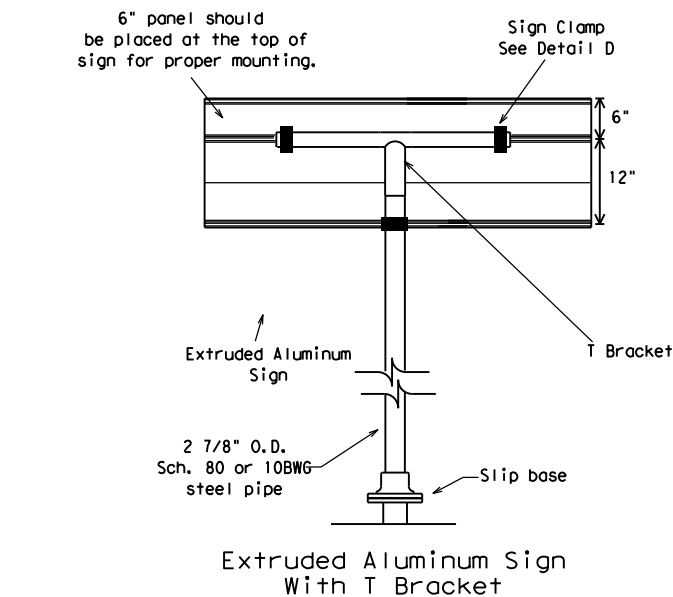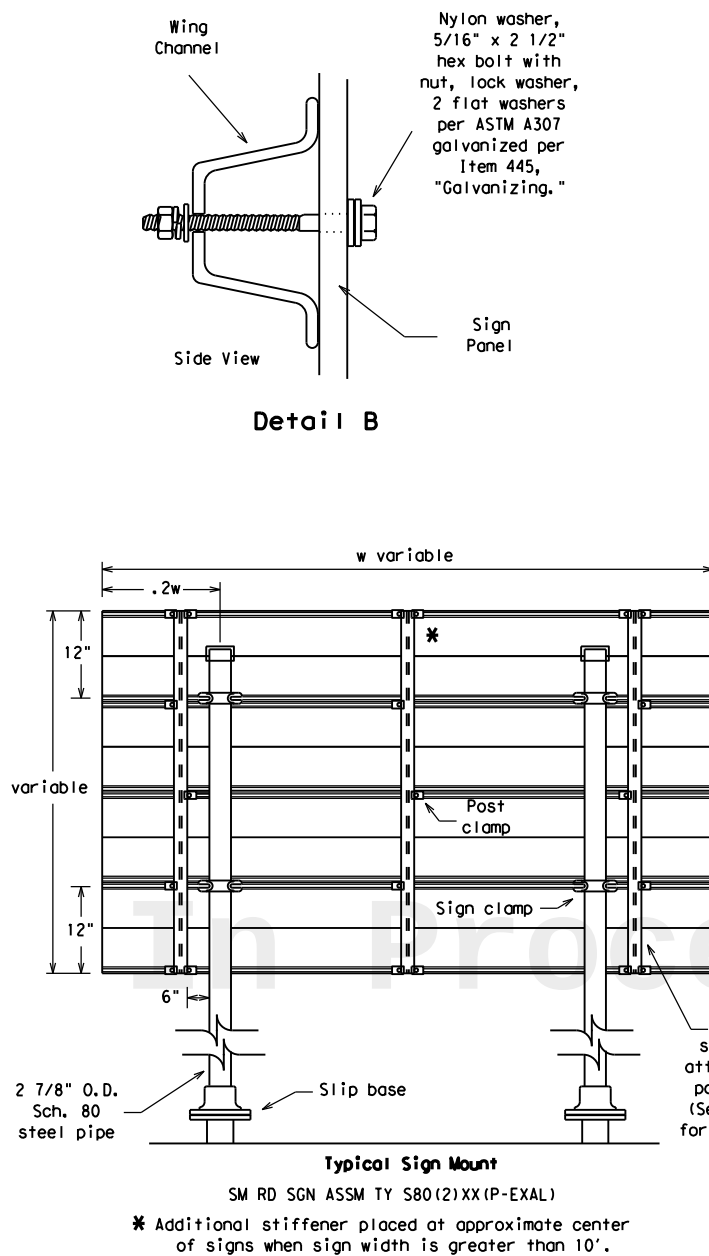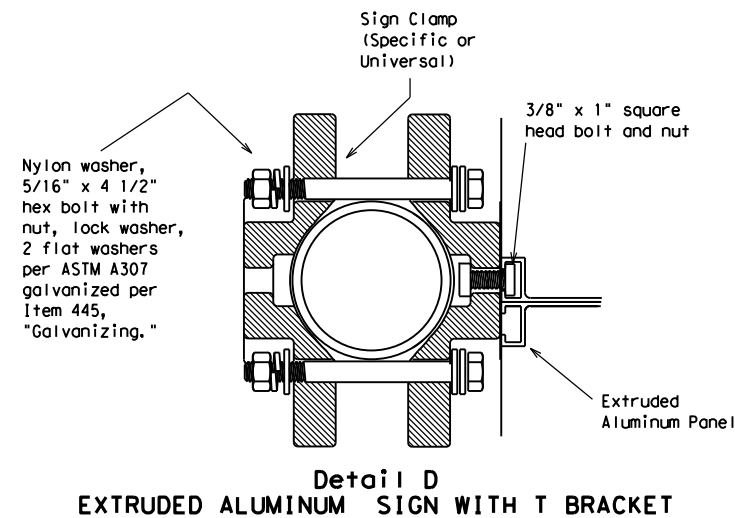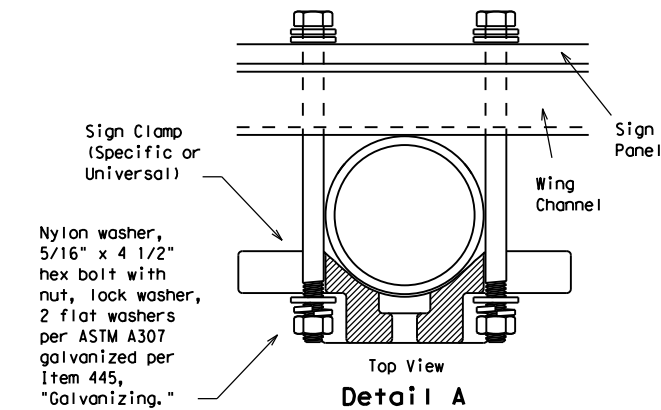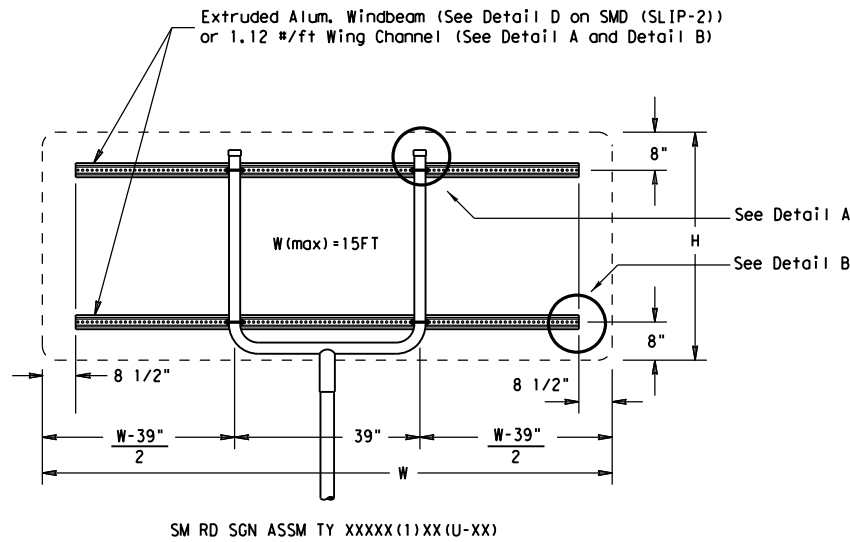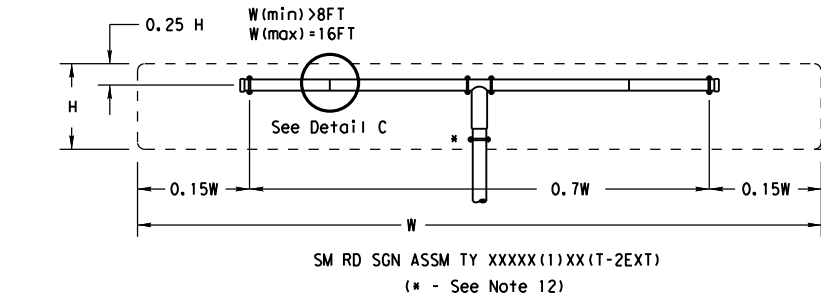

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.

REQUIRED SUPPORT		
SIGN DESCRIPTION		SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
Warning	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)



**SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM
SMD (SLIP-3) -08**


© TxDOT July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB
		DIST	COUNTY	SHEET NO.
				45

DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



GENERAL NOTES

1. Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
2. The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

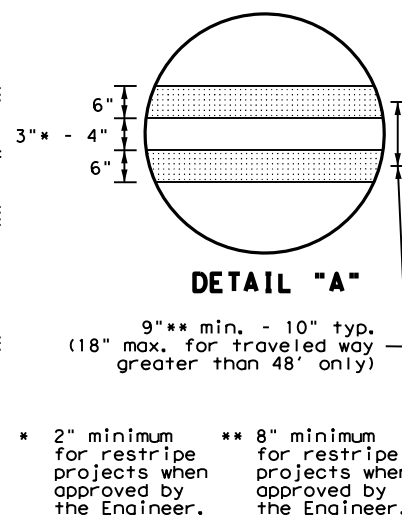


CENTERLINE AND LANE LINES FOUR LANE TWO-WAY ROADWAY WITH OR WITHOUT SHOULDERS




MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-420
EPOXY AND ADHESIVES	DMS-610
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-613
TRAFFIC PAINT	DMS-820
HOT APPLIED THERMOPLASTIC	DMS-822
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-824


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

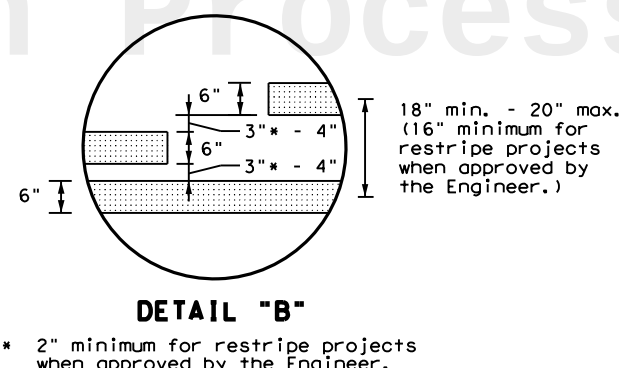

YIELD LINES



For posted speed on road
being marked equal to or
greater than 45 MPH.

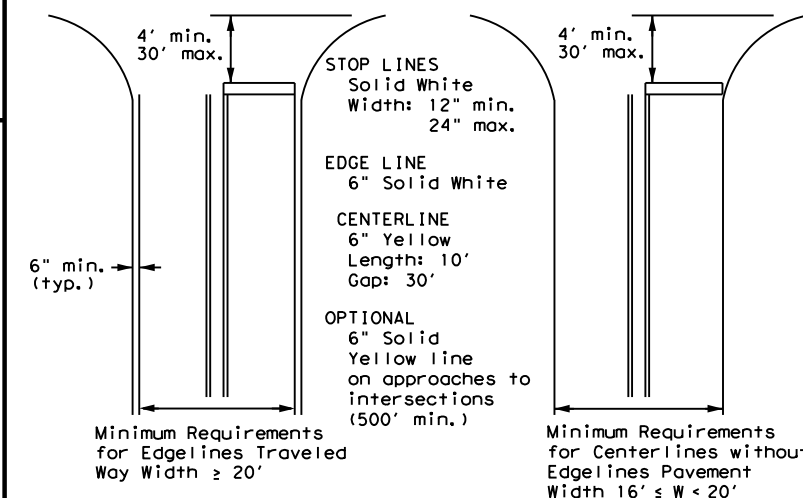

NOTE: Traveled way is exclusive of shoulder widths.
Refer to General Note 2 for additional details.

GUIDE FOR PLACEMENT OF STOP LINES, EDGE LINE & CENTERLINE

Based on Traveled Way and Pavement Widths
for Undivided Roadways



NOTES

1. Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
2. Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
3. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

TYPICAL STANDARD PAVEMENT MARKINGS

PM(1) - 22

FILE:	pm1-22.dgn	DN:	CK:	DW:	CK:
(C) TxDOT December 2022 REVISIONS 11-78 8-00 6-20 8-95 3-03 12-22 5-00 2-12		CONT	SECT	JOB	HIGHWAY
		DIST	COUNTY		SHEET
					46

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

STATE OF TEXAS §

COUNTY OF TRAVIS §

AGREEMENT For A LOCAL ON-SYSTEM IMPROVEMENT PROJECT

THIS AGREEMENT (Agreement) is made by and between the State of Texas, acting by and through the Texas Department of Transportation called the “State”, and the **Fort Bend County**, acting by and through its duly authorized officials, called the “Local Government.” The State and Local Government shall be collectively referred to as “the parties” hereinafter.

WITNESSETH

WHEREAS, the Texas Transportation Code, Section 201.103 establishes that the State shall design, construct and operate a system of highways in cooperation with local governments and Section 222.052 authorizes the Texas Transportation Commission to accept contributions from political subdivisions for development and construction of public roads and the state highway system within the political subdivision; and

WHEREAS, the Texas Transportation Commission passed Minute Order Number **116752**, authorizing the State to accept Local Government funded projects performed on the state highway system. The project covered by this Agreement includes only work within the state right of way as described in the Agreement, Article 2, Scope of Work (Project); and,

WHEREAS, the Governing Body of the Local Government has approved entering into this Agreement by resolution, ordinance, or commissioners court order dated **10/22/2024**, which is attached to and made a part of this Agreement as Attachment C, Resolution, Ordinance, or Commissioners Court Order (Attachment C) for the improvement covered by this Agreement. A map showing the Project location appears in Attachment A, Project Location Map (Attachment A), which is attached to and made a part of this Agreement.

NOW, THEREFORE, in consideration of the premises and of the mutual covenants and agreements of the parties, to be by them respectively kept and performed as set forth in this Agreement, it is agreed as follows:

AGREEMENT

1. Period of the Agreement

This Agreement becomes effective when signed by the last party whose signing makes the Agreement fully executed. This Agreement shall remain in effect until the completed Project is accepted by the State or unless terminated as provided below.

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

2. Scope of Work

The Project consists of the design and construction of a **traffic signal at the FM 359 / Fulshear-Gaston Road intersection in Fort Bend County**, Texas, as shown in Attachment A. All design and construction work shall be provided by the Local Government.

3. Local Project Sources and Uses of Funds

- A. The total estimated cost of the Project is shown in Attachment B, Local On-System Improvement Project Budget (Attachment B), which is attached to and made a part of this Agreement. The estimated funds from the Local Government are shown in Attachment B. The State will pay for no Project costs performed by or managed by Local Government under this Agreement.
- B. Attachment B shows how necessary resources for completing the Project will be provided by major cost categories. These categories may include but are not limited to: (1) costs of real property (right of way); (2) costs of utility work; (3) costs of environmental assessment and remediation; (4) cost of preliminary engineering and design; (5) cost of construction and construction management; and (6) any other Project costs.
- C. The Local Government shall be solely responsible for all of its costs associated with the Project provided for in this Agreement. The Local Government shall be responsible for cost overruns for the Project in excess of the estimated amount to be paid by the Local Government on Attachment B. The Local Government shall also be responsible for direct and indirect costs incurred by the State related to performance of this project if so indicated on Attachment B. If the State determines that the on-system improvements are of significant operational benefit to the State, the State may waive its direct or indirect costs. The State's waiver of its direct or indirect costs shall be indicated on Attachment B by showing the State as responsible for these costs. When the Local Government is responsible for the State's direct or indirect costs, the amount indicated on Attachment B is a fixed fee and not subject to adjustment except through the execution of an amendment to this Agreement.
- D. Prior to the performance of any engineering review work by the State, the Local Government shall pay to the State the amount of direct and indirect State costs specified in Attachment B.
- E. Whenever funds are paid by the Local Government to the State under this Agreement, the Local Government shall remit a check or warrant made payable to the "Texas Department of Transportation" or may use the State's Automated Clearing House (ACH) system for electronic transfer of funds in accordance with instructions provided by TxDOT's Financial Management Division. The funds shall be deposited and managed by the State and are not refundable.
- F. The Local Government will begin construction on the Project within 12 months after execution of the Agreement.
- G. The Local Government will complete construction and receive the State's acceptance of the project within 36 months after the date the State authorizes in writing for the Local Government to commence construction of the Project.
- H. If the Local Government chooses not to or fails to complete the work once construction on the Project commences, the State may terminate this Agreement in accordance with

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

paragraph 4.C. below. The State may address unfinished construction work as it determines necessary to protect the interests of the State, which includes returning the Project area to its original condition or completing the work using State forces or contractors. The Local Government shall pay all costs incurred by the State under this provision.

4. Termination of this Agreement

This Agreement shall remain in effect until the Project is completed and accepted by the State, unless:

- A. The Agreement is terminated in writing with the mutual consent of the parties;
- B. The State terminates the Agreement in writing due to the Local Government's failure to comply with paragraphs 3.F or 3.G; or
- C. The Agreement is terminated by one party because of a breach, in which case any cost incurred because of the breach shall be paid by the breaching party.

5. Amendments

Amendments to this Agreement due to changes in the character of the work, terms of the Agreement, or responsibilities of the parties relating to the Project may be enacted through a mutually agreed upon, written amendment. Amendments may not include the addition of State or Federal funds. If any funds other than Local Government funds are proposed, this Agreement must be terminated and a new agreement with appropriate terms and clauses executed in its place.

6. Remedies

This Agreement shall not be considered as specifying the exclusive remedy for any Agreement default, but all remedies existing at law and in equity may be availed of by either party to this Agreement and shall be cumulative.

7. Architectural and Engineering Services

The Local Government has responsibility for the performance of architectural and engineering services. The engineering plans shall be developed in accordance with the applicable *State's Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges* and the special specifications and special provisions related to it. The Project design shall, at a minimum conform to applicable State manuals.

The State shall review the plans, specifications, and estimates provided by the Local Government upon completion or at any time deemed necessary by the State. Should the State determine that the complete plans, specifications, and estimates for the Project are not acceptable, the Local Government shall correct the design documents to the State's satisfaction. Should additional specifications or data be required by the State, the Local Government shall redesign the plans and specifications to the State's satisfaction. The costs for additional work on the plans, specifications, and estimates shall be borne by the Local Government.

8. Environmental Assessment and Mitigation

Development of a transportation project must comply with applicable environmental laws. The Local Government is responsible for:

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

- A. The identification and assessment of any environmental problems associated with the development of the Project governed by this Agreement.
- B. The cost of any environmental problem's mitigation and remediation.
- C. Providing any public meetings or public hearings required for development of all required environmental documents and obtaining all required permits and approvals.
- D. The preparation of documents required for the environmental clearance of the Project.

Before the advertisement for bids, the Local Government shall provide to the State written documentation from the appropriate regulatory agency or agencies that all environmental clearances and approvals have been obtained.

9. Right of Way and Real Property

The Local Government shall acquire all required right of way and necessary right of entry for performance of the Project in accordance with applicable requirements of the Texas Department of Transportation Right of Way Manual, State law, and Federal law governing the acquisition of real property including but not limited to Title II and Title III of the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 Title 42 U.S.C.A. Section 4601 et seq. Right of way acquired for improvements to the state highway system shall be acquired in the name of the State. Local Government shall provide right of entry to State personnel and its authorized representatives to areas off the state highway system throughout the duration of the Project for the State to perform inspection and oversight of the Project.

10. Utilities

The Local Government shall be responsible for the adjustment, removal, or relocation of utility facilities for the Project in accordance with applicable State and Federal laws, regulations, rules, policies, and procedures, including any cost to the State of a delay resulting from the Local Government's failure to ensure that utility facilities are adjusted, removed, or relocated before the scheduled beginning of construction. The Local Government will not be reimbursed for the cost of required utility work. The Local Government must obtain advance approval for any variance from established procedures.

11. Compliance with Texas Accessibility Standards and ADA

Local Government shall ensure that the plans for and the construction of the Project are in compliance with standards issued or approved by the Texas Department of Licensing and Regulation (TDLR) as meeting or consistent with minimum accessibility requirements of the Americans with Disabilities Act (P.L. 101-336) (ADA).

12. Construction Responsibilities

- A. The Local Government shall advertise for construction bids, issue bid proposals, receive and tabulate the bids, and award and administer the contract for construction of the Project. Administration of the contract includes the responsibility for construction engineering and for issuance of any change orders, supplemental agreements, amendments, or additional work orders that may become necessary subsequent to the award of the construction contract. Project plans and specifications for improvements on the state highway system must be approved by the State prior to advertising for construction. Upon selection of a contractor and prior to commencing construction within the state highway system right of way, the Local Government shall request and

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

obtain written authorization to commence construction of the Project from the State. The Local Government will supervise and inspect all work performed hereunder and provide such engineering inspection and testing services as may be required to ensure that the construction is accomplished in accordance with the approved plans and specifications. All construction change orders impacting the proposed improvements, traffic control, environmental mitigation, or drainage on the state highway system require written pre-approval by the State prior to execution by the Local Government.

- B. Upon completion of the Project, the Local Government will issue and sign a "Notification of Completion" acknowledging the Project's construction completion. A copy will be provided to the State prior to State's final acceptance of the improvements.
- C. Prior to the State's acceptance of the improvements on the state highway system, Local Government shall furnish to the State written certification from a Texas Registered Professional Engineer that the Project was constructed in substantial compliance with the Project's plans, specifications, and quality assurance requirements.

13. Project Maintenance

After Local Government completion of the work and acceptance by the State, the State will be responsible for maintenance of the improvements within the state highway system right of way outside the boundaries of an incorporated city. This obligation may be fulfilled through other agreements signed by the State.

14. Notices

All notices to either party shall be delivered personally or sent by certified or U.S. mail, postage prepaid, addressed to that party at the following address:

Local Government	State
County Judge Fort Bend County 301 Jackson Street Richmond, Texas 77469	Director of Contract Services Texas Department of Transportation 125 E. 11 th Street Austin, Texas 78701

All notices shall be deemed given on the date delivered in person or deposited in the mail, unless otherwise provided by this Agreement. Either party may change the above address by sending written notice of the change to the other party. Either party may request in writing that notices shall be delivered personally or by certified U.S. mail, and that request shall be carried out by the other party.

15. Legal Construction

If one or more of the provisions contained in this Agreement shall for any reason be held invalid, illegal, or unenforceable in any respect, such invalidity, illegality, or unenforceability shall not affect any other provisions and this Agreement shall be construed as if it did not contain the invalid, illegal, or unenforceable provision.

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

16. Responsibilities of the Parties

The State and the Local Government agree that neither party is an agent, servant, or employee of the other party, and each party agrees it is responsible for its individual acts and deeds as well as the acts and deeds of its contractors, employees, representatives, and agents.

17. Ownership of Documents

Upon completion or termination of this Agreement, copies of all documents and data prepared under this Agreement by the Local Government for improvements within the state highway system right of way shall be provided to the State prior to State acceptance of the Project without restriction or limitation on their further use. The originals shall remain the property of the Local Government. At the request of the State, the Local Government shall submit any Project information required by the State in the format directed by the State.

18. Compliance with Laws

The parties shall comply with all federal, state, and local laws, statutes, ordinances, rules and regulations, and the orders and decrees of any courts or administrative bodies or tribunals in any manner affecting the performance of this Agreement. When required, the Local Government shall furnish the State with satisfactory proof of this compliance.

19. Sole Agreement

This Agreement constitutes the sole and only agreement between the parties and supersedes any prior understandings or written or oral agreements respecting the Agreement's subject matter.

20. Inspection of Books and Records

The parties to this Agreement shall maintain all books, documents, papers, accounting records, and other documentation relating to costs incurred and engineering inspection and testing services performed under this Agreement and shall make such materials available to the State and the Local Government or their duly authorized representatives for review and inspection at its office during the Agreement period and for seven (7) years from the date of completion of work defined under this Agreement or until any impending litigation or claims are resolved. Additionally, the State and the Local Government and their duly authorized representatives shall have access to all the governmental records that are directly applicable to this Agreement for the purpose of making audits, examinations, excerpts, and transcriptions.

21. Insurance

Before beginning work on the state highway system, the Local Government and its contractor performing the work shall provide the State with a fully executed copy of the State's Form 1560 Certificate of Insurance verifying the existence of coverage in the amounts and types specified on the Certificate of Insurance for all persons and entities working on state right of way. Self-insurance documentation acceptable to the State may be substituted for all or part of the coverage's required for the Local Government. This coverage shall be maintained until all work on the state right of way is complete. If coverage is not maintained, all work on state right of way shall cease immediately, and the State may recover damages and all costs of completing the work.

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

22.


Pertinent Non-Discrimination Authorities

During the performance of this Agreement, the Local Government, for itself, its assignees, and successors in interest agree to comply with all applicable Federal and State nondiscrimination statutes and authorities.
23.

Signatory Warranty


Each signatory warrants that the signatory has necessary authority to execute this Agreement on behalf of the entity represented.

Each party is signing this agreement on the date stated under that party’s signature.

THE STATE OF TEXAS	THE LOCAL GOVERNMENT
DocuSigned by:  F1CDA90FDB8C4B6... Signature	DocuSigned by:  F548587DD28D433... Signature
Kenneth Stewart Typed or Printed Name	KP George Typed or Printed Name
Director of Contract Services Typed or Printed Title	County Judge Typed or Printed Title
11/27/2024 Date	11/26/2024 Date

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

ATTACHMENT A
PROJECT LOCATION MAP

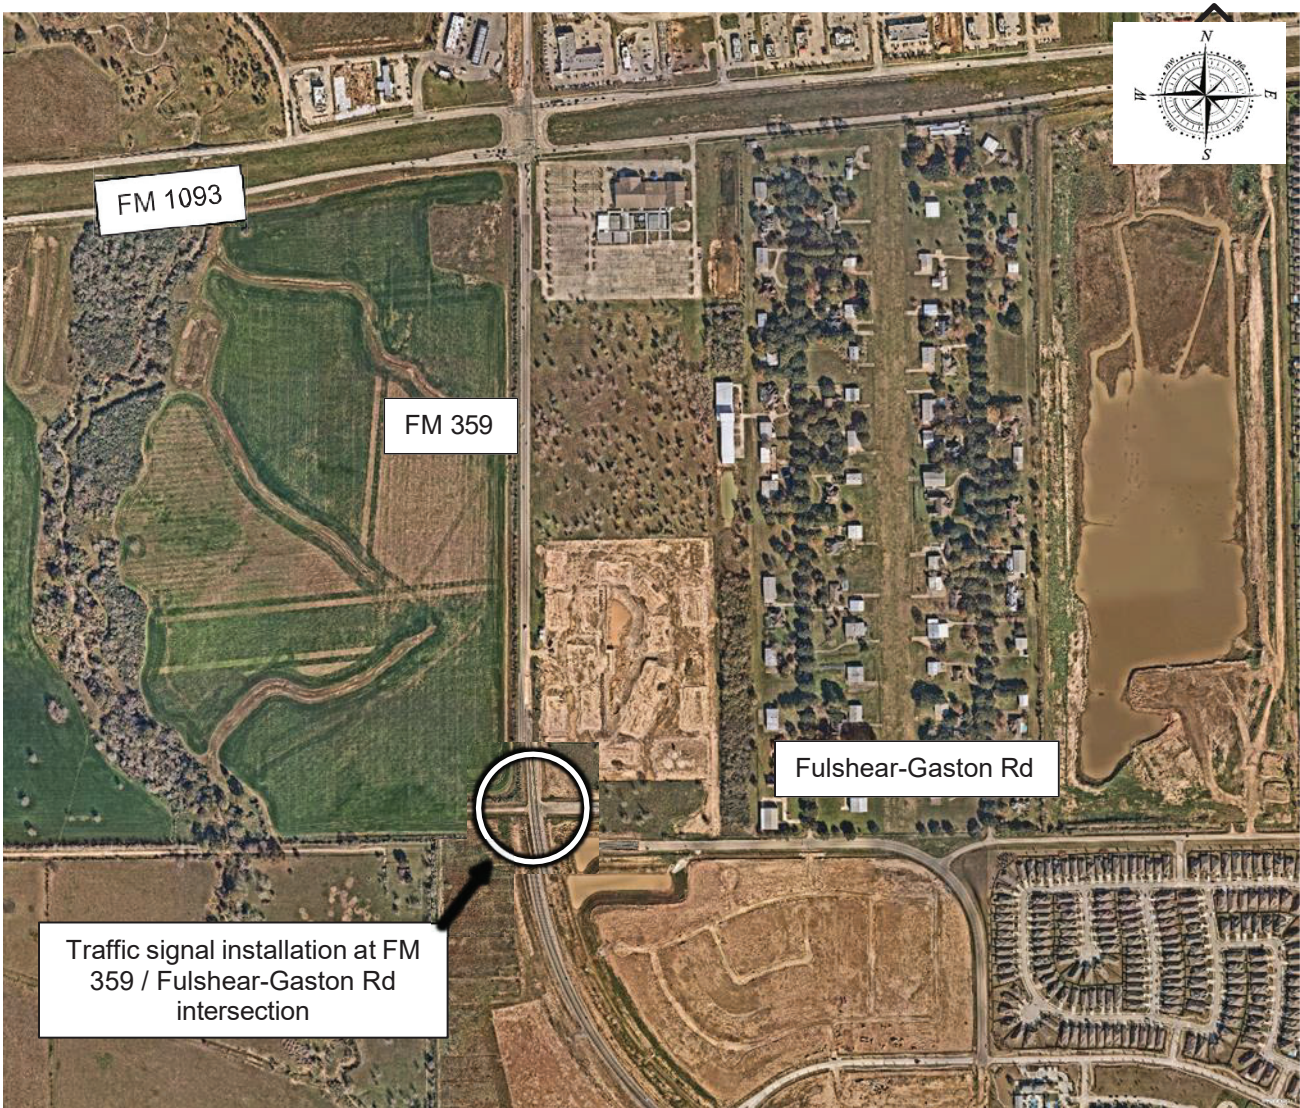

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

ATTACHMENT B
LOCAL ON-SYSTEM IMPROVEMENT PROJECT BUDGET
(Locally Funded and Performed Project)

The Local Government is responsible for 100% of the costs allocated to it as described below, including overruns.

Description	Estimated Costs	Subtotals
PROJECT PHASES: Work performed by the Local Government or its Consultant or Contractor		
Environmental	\$	
Right of Way	\$	
Engineering	\$33,000.00	
Utility Work	\$	
Construction	\$350,000.00	
Subtotal for Project Phases		\$383,000.00
DIRECT STATE COSTS:	Paid By: ☐ Local Government ☒ State	
Environmental	\$200.00	
Right of Way	\$200.00	
Engineering	\$1320.00	
Utility Work	\$200.00	
Construction	\$14,000.00	
Subtotal for Direct State Costs		\$15,920.00
INDIRECT STATE COSTS:	Paid By: ☐ Local Government ☒ State	
Subtotal for Indirect State Costs		\$842.17
TOTAL ESTIMATED COST OF PROJECT		\$399,762.17

\$0	Fixed price amount of payment by the Local Government to the State for the State's direct and indirect costs as stated in Article 3, C and D of the Agreement.
------------	--

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

ATTACHMENT C
RESOLUTION, ORDINANCE, OR COMMISSIONERS COURT ORDER

311

ORDER OF COMMISSIONERS COURT

The Commissioners Court of Fort Bend County, Texas, convened in regular session at a regular term of said Court, open to the public, at the Fort Bend County Courthouse in the City of Richmond, Texas, on October 22, 2024 with a quorum of said Court present:

Whereupon, among other business, the County considered the following:

AN ORDER AUTHORIZING EXECUTION OF AN AGREEMENT FOR A LOCAL ON-SYSTEM IMPROVEMENT PROJECT BETWEEN FORT BEND COUNTY AND THE STATE OF TEXAS ACTING BY AND THROUGH THE TEXAS DEPARTMENT OF TRANSPORTATION TO DESIGN AND CONSTRUCT A TRAFFIC SIGNAL AT THE FM 359 / FULSHEAR-GASTON INTERSECTION IN FORT BEND COUNTY, TEXAS.

Commissioner Prestage introduced an order and moved that Commissioners Court adopt the order. Commissioner Morales seconded the motion for adoption of the order. The motion, carrying with it the adoption of the order, prevailed by the following vote:

	Yes	No	Abstain
Judge KP George	X	—	—
Commissioner Vincent Morales	X	—	—
Commissioner Grady Prestage	X	—	—
Commissioner Andy Meyers	—	—	—
Commissioner Dexter McCoy	X	—	—

The County Judge thereupon announced that the motion had duly and lawfully carried and that the order had been duly and lawfully adopted. The order thus adopted follows:

IT IS ORDERED THAT:

1. The Fort Bend County Judge is authorized to execute on behalf of Fort Bend County the Agreement for a Local On-System Improvement Project between Fort Bend County and the State of Texas acting by and through the Texas Department of Transportation to design and construct a traffic signal at the FM 359 / Fulshear-Gaston intersection in Fort Bend County, Texas. Fort Bend County will be responsible for one hundred percent of the Local Participation Cost as estimated and shown in the Agreement for a Local On-System Improvement Project.
2. All Fort Bend County officials and employees are authorized to do any and all things necessary or convenient to accomplish the purposes of this order.

10/25/2024 Original (e) sent to Miguel Serrano / Jillian Peterson, Engineering

CSJ #	12-5LOSA002
District #	HOU-12
Code Chart 64 #	50080
Project Name	FM 359 @ Fulshear-Gaston Road

Approved by the Commissioners Court of Fort Bend County, Texas, this 22nd day of October, 2024.

FORT BEND COUNTY, TEXAS

By: KP George
KP George, County Judge

ATTEST:

Laura Richard
Laura Richard, County Clerk



Certificate Of Completion

Envelope Id: DB012D77-3E9E-481B-8EE3-EFA5993829C0

Status: Sent

Subject: DocuSign: 24040066 FM359 - 1058 Permit

Source Envelope:

Document Pages: 68

Signatures: 0

Envelope Originator:

Certificate Pages: 5

Initials: 0

Cindy Kurtz

AutoNav: Enabled

125 E. 11th Street

Envelopeld Stamping: Enabled

Austin, TX 78701

Time Zone: (UTC-06:00) Central Time (US & Canada)

Cindy.Kurtz@txdot.gov

IP Address: 18.253.34.110

Record Tracking

Status: Original

Holder: Cindy Kurtz

Location: DocuSign

1/23/2025 12:28:05 PM

Cindy.Kurtz@txdot.gov

Security Appliance Status: Connected

Pool: StateLocal

Storage Appliance Status: Connected

Pool: Texas Department of Transportation

Location: DocuSign

Signer Events

Signature

Timestamp

Stephen Moore

Sent: 1/23/2025 12:39:44 PM

smoore@half.com

Viewed: 1/27/2025 9:46:13 AM

Security Level: Email, Account Authentication
(Optional)

Electronic Record and Signature Disclosure:

Accepted: 1/27/2025 9:46:13 AM

ID: d3c2a92e-9278-435b-b6b7-bc46be5e40e9

Carlos Zepeda

Carlos.Zepeda@txdot.gov

Security Level: Email, Account Authentication
(Optional)

Electronic Record and Signature Disclosure:

Not Offered via DocuSign

In Process

In Person Signer Events

Signature

Timestamp

Editor Delivery Events

Status

Timestamp

Agent Delivery Events

Status

Timestamp

Intermediary Delivery Events

Status

Timestamp

Certified Delivery Events

Status

Timestamp

Carbon Copy Events

Status

Timestamp

Cindy Kurtz

cindy.kurtz@txdot.gov

Security Level: Email, Account Authentication
(Optional)

Electronic Record and Signature Disclosure:

Not Offered via DocuSign

Tarik Taheri

Tarik.Taheri@txdot.gov

Security Level: Email, Account Authentication
(Optional)

Electronic Record and Signature Disclosure:

Not Offered via DocuSign

Carbon Copy Events	Status	Timestamp
Tony Novosad Tony.Novosad@txdot.gov Security Level: Email, Account Authentication (Optional) Electronic Record and Signature Disclosure: Not Offered via DocuSign		

Witness Events	Signature	Timestamp
----------------	-----------	-----------

Notary Events	Signature	Timestamp
---------------	-----------	-----------

Envelope Summary Events	Status	Timestamps
-------------------------	--------	------------

Envelope Sent	Hashed/Encrypted	1/23/2025 12:39:44 PM
---------------	------------------	-----------------------

Payment Events	Status	Timestamps
----------------	--------	------------

Electronic Record and Signature Disclosure		
--	--	--

In Process

ELECTRONIC RECORD AND SIGNATURE DISCLOSURE

From time to time, Texas Department of Transportation (we, us or Company) may be required by law to provide to you certain written notices or disclosures. Described below are the terms and conditions for providing to you such notices and disclosures electronically through your DocuSign, Inc. (DocuSign) Express user account. Please read the information below carefully and thoroughly, and if you can access this information electronically to your satisfaction and agree to these terms and conditions, please confirm your agreement by clicking the 'I agree' button at the bottom of this document.

Getting paper copies

At any time, you may request from us a paper copy of any record provided or made available electronically to you by us. For such copies, as long as you are an authorized user of the DocuSign system you will have the ability to download and print any documents we send to you through your DocuSign user account for a limited period of time (usually 30 days) after such documents are first sent to you. After such time, if you wish for us to send you paper copies of any such documents from our office to you, you will be charged a \$0.00 per-page fee. You may request delivery of such paper copies from us by following the procedure described below.

Withdrawing your consent

If you decide to receive notices and disclosures from us electronically, you may at any time change your mind and tell us that thereafter you want to receive required notices and disclosures only in paper format. How you must inform us of your decision to receive future notices and disclosure in paper format and withdraw your consent to receive notices and disclosures electronically is described below.

Consequences of changing your mind

If you elect to receive required notices and disclosures only in paper format, it will slow the speed at which we can complete certain steps in transactions with you and delivering services to you because we will need first to send the required notices or disclosures to you in paper format, and then wait until we receive back from you your acknowledgment of your receipt of such paper notices or disclosures. To indicate to us that you are changing your mind, you must withdraw your consent using the DocuSign 'Withdraw Consent' form on the signing page of your DocuSign account. This will indicate to us that you have withdrawn your consent to receive required notices and disclosures electronically from us and you will no longer be able to use your DocuSign Express user account to receive required notices and consents electronically from us or to sign electronically documents from us.

All notices and disclosures will be sent to you electronically

Unless you tell us otherwise in accordance with the procedures described herein, we will provide electronically to you through your DocuSign user account all required notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to you during the course of our relationship with you. To reduce the chance of you inadvertently not receiving any notice or disclosure, we prefer to provide all of the required notices and disclosures to you by the same method and to the same address that you have given us. Thus, you can receive all the disclosures and notices electronically or in paper format through the paper mail delivery system. If you do not agree with this process, please let us know as described below. Please also see the paragraph immediately above that describes the consequences of your electing not to receive delivery of the notices and disclosures electronically from us.

How to contact Texas Department of Transportation:

You may contact us to let us know of your changes as to how we may contact you electronically, to request paper copies of certain information from us, and to withdraw your prior consent to receive notices and disclosures electronically as follows:

To contact us by email send messages to: kevin.setoda@txdot.gov

To advise Texas Department of Transportation of your new e-mail address

To let us know of a change in your e-mail address where we should send notices and disclosures electronically to you, you must send an email message to us at kevin.setoda@txdot.gov and in the body of such request you must state: your previous e-mail address, your new e-mail address. We do not require any other information from you to change your email address..

In addition, you must notify DocuSign, Inc to arrange for your new email address to be reflected in your DocuSign account by following the process for changing e-mail in DocuSign.

To request paper copies from Texas Department of Transportation

To request delivery from us of paper copies of the notices and disclosures previously provided by us to you electronically, you must send us an e-mail to kevin.setoda@txdot.gov and in the body of such request you must state your e-mail address, full name, US Postal address, and telephone number. We will bill you for any fees at that time, if any.

To withdraw your consent with Texas Department of Transportation

To inform us that you no longer want to receive future notices and disclosures in electronic format you may:

- i. decline to sign a document from within your DocuSign account, and on the subsequent page, select the check-box indicating you wish to withdraw your consent, or you may;
- ii. send us an e-mail to kevin.setoda@txdot.gov and in the body of such request you must state your e-mail, full name, IS Postal Address, telephone number, and account number. We do not need any other information from you to withdraw consent.. The consequences of your withdrawing consent for online documents will be that transactions may take a longer time to process..

Required hardware and software

Operating Systems:	Windows2000? or WindowsXP?
Browsers (for SENDERS):	Internet Explorer 6.0? or above
Browsers (for SIGNERS):	Internet Explorer 6.0?, Mozilla FireFox 1.0, NetScape 7.2 (or above)
Email:	Access to a valid email account
Screen Resolution:	800 x 600 minimum
Enabled Security Settings:	• Allow per session cookies

	• Users accessing the internet behind a Proxy Server must enable HTTP 1.1 settings via proxy connection
--	---

** These minimum requirements are subject to change. If these requirements change, we will provide you with an email message at the email address we have on file for you at that time providing you with the revised hardware and software requirements, at which time you will have the right to withdraw your consent.

Acknowledging your access and consent to receive materials electronically

To confirm to us that you can access this information electronically, which will be similar to other electronic notices and disclosures that we will provide to you, please verify that you were able to read this electronic disclosure and that you also were able to print on paper or electronically save this page for your future reference and access or that you were able to e-mail this disclosure and consent to an address where you will be able to print on paper or save it for your future reference and access. Further, if you consent to receiving notices and disclosures exclusively in electronic format on the terms and conditions described above, please let us know by clicking the 'I agree' button below.

By checking the 'I Agree' box, I confirm that:

- I can access and read this Electronic CONSENT TO ELECTRONIC RECEIPT OF ELECTRONIC RECORD AND SIGNATURE DISCLOSURES document; and
- I can print on paper the disclosure or save or send the disclosure to a place where I can print it, for future reference and access; and
- Until or unless I notify Texas Department of Transportation as described above, I consent to receive from exclusively through electronic means all notices, disclosures, authorizations, acknowledgements, and other documents that are required to be provided or made available to me by Texas Department of Transportation during the course of my relationship with you.