

**REVIEW BY FORT BEND COUNTY  
COMMISSIONERS COURT**

**Fort Bend County  
Engineering Department**  
301 Jackson Suite 401  
Richmond, Texas 77469  
281.633.7500  
Permits@fortbendcountytx.gov

Right of Way Permit  
 Commercial Driveway Permit  
Permit No: 2018-18564

**Applicant:** Fibernet Direct Texas, LLC

**Job Location Site:** W. Bellfort Street, Sugar Land, TX 77498

**Bond No.**                      **Date of Bond:** 7/26/2016 **Amount:** \$50,000.00

The above applicant came to make use of certain Fort Bend County property subject to, "The Order Regulating the Laying, Construction, Maintenance, and Repair of Buried Cables, Conduits, and Pole Lines, In, Under, Across or Along Roads, Streets, Highways, and Drainage Ditches in Fort Bend County, Texas, Under the Jurisdiction of the Commissioners Court of Fort Bend County, Texas," as passed by the Commissioners Court of Fort Bend County, Texas, of the Minutes of the Commissioners Court of Fort Bend County, Texas, to the extent that such order is not inconsistant with Chapter 181, Vernon's Texas Statutes and Codes Annotated.

**Notes:**

1. Evidence of review by the Commissioners Court must be kept on the job site and failure to do so constitutes grounds for job shutdown.
2. Written notices are required:
  - a. 48 hours in advance of construction start up, and
  - b. When construction is completed and ready for final inspection, submit notification to Permit Administrator thru MyGovernmentOnline.org portal.
3. This permit expires one (1) year from date of permit if construction has not commenced.

On this 27th day of February, 2018, Upon Motion of Commissioner Meyers, seconded by Commissioner Patterson, duly put and carried, it is ORDERED, ADJUDGED AND DECREED that said notice of said above purpose is hereby acknowledged by the Commissioners Court of Fort Bend County, Texas, and that said notice be placed on record according to the regulation order thereof.

**Signature**


Presented to Commissioners Court and approved.

By: Charles O. Ay  
for County Engineer

Date Recorded 3-5-2018 Comm. Court No. 14U

N/A  
By: \_\_\_\_\_  
Drainage District Engineer/Manager

Clerk of Commissioners Court  
By: Amide Walters  
Deputy



**PERMIT APPLICATION REVIEW FORM FOR  
CABLE, CONDUIT, AND POLE LINE ACTIVITY  
IN FORT BEND COUNTY**

**Fort Bend County  
Engineering Department**  
301 Jackson Suite 401  
Richmond, Texas 77469  
281.633.7500  
Permits@fortbendcountytexas.gov

- Right of Way Permit  
 Commercial Driveway Permit

Permit No: 2018-18564

The following "Notice of Proposed Cable, Conduit, and/or Pole Line activity in Fort Bend County" and accompanying attachments have been reviewed and the notice conforms to appropriate regulations set by Commissioner's Court of Fort Bend County, Texas.

**(1) COMPLETE APPLICATION FORM:**

- a. Name of road, street, and/or drainage ditch affected.  
 b. Vicinity map showing course of directions  
 c. Plans and specifications

**(2) BOND:**

- County Attorney, approval when applicable.
- Perpetual bond currently posted.      Bond No:                           Amount: \$50,000.00
- Performance bond submitted.      Bond No:                           Amount:
- Cashier's Check      Check No:                           Amount:

**(3) DRAINAGE DISTRICT APPROVAL (WHEN APPLICABLE):**

\_\_\_\_\_  
Drainage District Approval

\_\_\_\_\_  
Date

**We have reviewed this project and agree it meets minimum requirements.**

*Charles O. Ay*

\_\_\_\_\_  
Permit Administrator

2/16/2018

\_\_\_\_\_  
Date



# GENERAL NOTES

## GENERAL NOTES:

1. CONTRACTOR MUST OBTAIN LOCATES PRIOR TO DISTURBING THE GROUND.
2. THE CONTRACTOR SHALL CONTACT A MEMBER OF TEXAS ONE CALL SYSTEM A MIN. OF 48 HOURS BEFORE DIGGING. YOU ONLY NEED TO CONTACT ONE CENTER. THAT CENTER WILL RELAY THE INFORMATION TO THE OTHER TWO CENTERS.
  - TEXAS ONE CALL 713-223-4567 OR 1-800-245-4545
  - TESS (TEXAS EXCAVATION SAFETY SYSTEM) 811
  - LONE STAR NOTIFICATION SYSTEM 800-669-8344 OR 713-223-4567
- REMINDER : ANY UNDERGROUND FACILITY OWNERS WHO ARE NOT MEMBERS OF TEXAS ONE CALL, TESS OR LONESTAR
3. NOTIFICATION CENTERS IN THE STATE OF TEXAS, MUST BE CONTACTED DIRECTLY BY THE ORIGINATOR OF THE LOCATION REQUEST.
4. CONTRACTOR MUST HAVE A COPY OF THE APPROVED PERMIT FROM THE APPROPRIATE AGENCY ON THE JOBSITE AT ALL TIMES.
5. THE CONTRACTOR SHALL VERIFY THE ROAD R.O.W. AND EASEMENTS PRIOR TO COMMENCING WORK. NO FACILITIES SHOULD BE PLACED ON PRIVATE PROPERTY UNLESS OTHERWISE SPECIFIED.
6. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND FACILITIES BEFORE COMMENCING WORK AND AGREE TO BE FULLY RESPONSIBLE FOR ALL DAMAGES CAUSED BY HIS FAILURE TO EXACTLY LOCATE AND PRESENVE ALL UNDERGROUND FACILITIES.
7. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGES TO EXISTING WATER, WASTEWATER AND STORM DRAINAGE LINES. DAMAGES SHALL BE REPAIRED IN ACCORDANCE WITH THE MUNICIPALITY AGENCY (STATE, COUNTY, OR CITY), DEPARTMENT OF PUBLIC WORKS AND ENGINEERING'S STANDARD CONSTRUCTION SPECIFICATIONS FOR WASTEWATER COLLECTION SYSTEMS, WATER LINES, STORM DRAINAGE, AND STREET PAVING AND STANDARD CONSTRUCTION DETAILS FOR WASTEWATER COLLECTION SYSTEMS, WATER LINES, STORM DRAINAGE, AND STREET PAVING REFERENCED ABOVE, AT NO ADDITIONAL COST.
8. ALL CABLE WILL BE PLACED AT STANDARD MINIMUM DEPTH. (CROWN CASTLE FIBER STANDARD IS 48" DEEP UNLESS OTHERWISE DIRECTED BY A CROWN CASTLE FIBER REPRESENTATIVE OR SPECIFIED ON THE DRAWINGS.)
9. NO MORE TRENCH OPENED AT ONE TIME THAN CAN BE BACKFILLED AND COMPACTED IN 10" LIFTS AT THE END OF EACH DAY. ( NO TRENCH LEFT OPENED OVERNIGHT )
10. ALL EXCESS EXCAVATION TO BE REMOVED FROM THE ROAD RIGHT-OF-WAY AT THE END OF EACH DAY.
11. ADEQUATE DRAINAGE SHALL BE MAINTAINED AT ALL TIMES DURING CONSTRUCTION AND ANY DRAINAGE DITCH OR STRUCTURE DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO EXISTING CONDITIONS OR BETTER.
12. ROAD MUST BE KEPT OPEN TO TRAFFIC AND CONTRACTOR MUST PROVIDE ADEQUATE FLAGMEN, SIGNALS, ETC., TO PROVIDE COMPLETE SAFETY TO THE PUBLIC. IF IT BECOMES NECESSARY FOR EQUIPMENT TO OPERATE ON A PORTION OF THE PAVEMENT, PRECAUTIONS MUST BE TAKEN TO PREVENT ANY DAMAGE WHATSOEVER TO THE PAVEMENT.
13. CONDITION OF ROAD UPON COMPLETION OF JOB SHALL BE AS GOOD OR BETTER THAN PRIOR TO STARTING
14. CONTRACTOR SHALL COMPLY WITH LATEST EDITION OF OSHA REGULATIONS AND THE STATE OF TEXAS LAWS CONCERNING EXCAVATION.
15. CONTRACTOR SHALL TAKE NECESSARY PRECAUTIONS TO PROTECT ROOT SYSTEMS OF SHRUBS, PLANTS, AND TREES ALONG THE AREA OF EXCAVATION.
16. NO CONSTRUCTION ON PRIVATE PROPERTY WILL COMMENCE UNTIL RIGHT OF ENTRY OR EASEMENT IS GRANTED.
17. CONTRACTOR SHALL NOT EXCEED THE PURCHASE ORDER VALUE WITHOUT AUTHORIZATION IN WRITING FROM THE APPROPRIATE CROWN CASTLE FIBER REPRESENTATIVE ANY LANDSCAPING WILL BE REPLACED TO EQUAL OR BETTER THAN THAT WHICH EXISTED PRIOR TO WORK.
18. PROJECT SITE WILL BE PROPERLY SECURED PRIOR TO THE END OF EACH DAY.
19. ALL WORK IS TO BE IN ACCORDANCE WITH THE STANDARDS OF ALL AUTHORITIES HAVING JURISDICTION IN THE WORK ZONE.
20. CONTRACTORS ARE ADVISED TO CONTACT CROWN CASTLE FIBER FOR ANY ADDITIONAL INFORMATION OR CLARIFICATION CONCERNING SCOPE OF WORK OR THE REQUIREMENTS NECESSARY FOR PROJECT COMPLETION.
21. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, QUANTITIES AND EXISTING CONDITIONS PRIOR TO CONSTRUCTION. IF A SIGNIFICANT CHANGE TO THE RUNNING LINE IS NEEDED, PLEASE CONTACT YOUR CROWN CASTLE FIBER REPRESENTATIVE BEFORE PROCEEDING.
22. BEFORE CONSTRUCTION BEGINS, CONTRACTOR SHALL TAKE APPROPRIATE PRECAUTIONS TO AVOID ANY POTENTIAL OBSTRUCTIONS PRIOR TO PROCEEDING WITH WORK.
23. CONTRACTOR SHALL TAKE NECESSARY PRECAUTIONS TO PROTECT ROOT SYSTEMS OF SHRUBS, PLANTS, AND TREES ALONG THE AREA OF EXCAVATION.
24. CONTRACTOR WILL COMPLETE ALL WORK PER "CROWN CASTLE FIBER" CONSTRUCTION SPECIFICATIONS.
25. CONTRACTOR SHALL MAINTAIN A SET OF REDLINE DRAWINGS RECORDING AS-BUILT CONDITIONS DURING CONSTRUCTION. THESE REDLINE MARKED UP DRAWINGS WILL BE SUBMITTED TO THE DESIGN CONSULTANT WHO WILL MAKE THE CHANGES ON THE AS-BUILT RECORD DRAWINGS.
26. RIGHT-OF-WAY WILL BE RESTORED TO EQUAL OR BETTER CONDITION WHEN CONSTRUCTION IS COMPLETE.

ABBR	DESCRIPTION
B.O.	BUILDING OWNED
B.O.C.	BUILDING OWNED CONDUIT
EOC	EDGE OF CURB
EMT	ELECTRIC METALLIC TUBING
EOP	EDGE OF PAVEMENT
FDP	FIBER DISTRIBUTION PANEL
FF	FINISHED FLOOR
FMC	FLEXIBLE METALLIC CONDUIT
GRC	GALVANIZED RIGID CONDUIT
HDPPE	HIGH DENSITY POLYETHYLENE
HH	HANDHOLE
JB	JUNCTION BOX
MH	MANHOLE
PB	PULLBOX
PL	PROPERTY LINE
PVC	POLYVINYL CHLORIDE
ROW	RIGHT OF WAY
SP	SPLICE PANEL
STA.	STATION
SW	SIDEWALK

## APWA STANDARD

COLOR CODE FOR TEMPORARY MARKING OF UNDERGROUND FACILITIES:

RED = ELECTRIC POWERLINES, CABLES, CONDUIT AND LIGHTING CABLES  
 YELLOW = GAS, OIL, STEAM, PETROLEUM OR GASEOUS MATERIAL  
 ORANGE = COMMUNICATION, ALARM, OR SIGNAL LINES, CABLES, OR CONDUIT  
 BLUE = POTABLE WATER  
 GREEN = SEWER AND DRAIN LINES  
 PURPLE = RECLAIMED WATER, IRRIGATION, AND SLURRY  
 PINK = TEMPORARY SURVEY MARKINGS  
 WHITE = PROPOSED EXCAVATION



TITLE: HO 01006A - SPAN 330 - FT. BEND COUNTY	
LOC:	FT. BEND COUNTY, TX
PROJECT FOR BUILDING:	N/A
OWNER:	FT. Bend County - HO 01006A - SPAN 330 - FS
DRAWING DATE:	ENG DESIGN
ORIGINAL DATE:	07/29/18
DESIGNER:	EGS
AS-BUILT:	N/A
DATE:	N/A
PROJECT:	N/A
PAGE:	2
OF:	21

PROPRIETARY INFORMATION OF CROWN CASTLE FIBER



BELKNAP RD.

NOTE:  
THE 1st SECTION OF THIS RIGHT OF WAY REPORT STARTS AT THE INTERSECTION OF BELKNAP RD AND THE SECTION BEING PROPOSED EAST ON W. BELLFORT AVE. THE SECTION SHOWN CONTAINING DIST. ON W. BELLFORT AVE IS FOR REFERENCE ONLY.

13510 W. BELLFORT ST.

13426 W. BELLFORT ST.

10560 W. BELLFORT ST.

10570 SYNOTT RD.

10560 SYNOTT RD.

FM 1876 SYNOTT RD.

W. BELLFORT AVE.

HERE CONDUIT SHOULD BE A MINIMUM OF 2' BELOW ULTIMATE DITCH.

47+00  
3'-1.25'

47+02  
CC FIBER HANDHOLE  
30x48x28

47+14  
3'-1.25'

47+15  
CC FIBER HANDHOLE  
30x48x28

CITY OF HOUSTON  
SIDEWALK

CITY OF HOUSTON  
SIDEWALK


CITY OF HOUSTON  
SIDEWALK

# PROJECT SHEET 4

SEE PROJECT SHEET 3

36+49.2

FM 1876 ELDRIDGE RD.



TITLE: HO 01008A - SPAN 330 - FT. BEND COUNTY	
LOG:	FT. BEND COUNTY, TX
PROJECT:	FT. BEND COUNTY, TX
DATE:	01/29/18
DESIGNER:	ENGINEERING
DRAWING:	ENGINEERING
DATE:	01/29/18
ASBUILT:	N/A
SCALE:	1" = 100'
PAGE:	4
OF:	21

PROPRIETARY INFORMATION OF CROWN CASTLE FIBER

CONSTRUCTION NOTES



**PROJECT CONSTRUCTION NOTES**

1. ALL PROPOSED 1/2" CONSTRUCTION SHALL BE 1/2" CONSTRUCTION UNLESS OTHERWISE INDICATED. INDICATE BONDING THREE 1/2" BORE FIBER OPTIC AND ONE FIBER CABLE, UNLESS OTHERWISE INDICATED.
2. ALL HAND HOLES ARE 24"x36"x36" (UNLESS OTHERWISE INDICATED) WITH 100' OF FIBER SACK (100')

# PROJECT SHEET 5

SEE PROJECT SHEET 6

W. BELLFORT AVE.

SOUTHLINE RD.

NEW VILLAGE LN.

66+45

65+43 CC FIBER HANDHOLE 30x48x36

67+07

62+37 CC FIBER HANDHOLE 30x48x36

61+07 VERGON HANDHOLE 17x20x24

H-H= 30' 1'-1.25'

H-H= 20' 3'-1.25'

H-H= 40' 1'-4"

SITE INST - 30419  
HO 0075 - 08871 - ADDRESS NOT  
13825 W. BELLFORT RD.

10534 BELKNAP RD.

10534 BELKNAP RD.

55+02 CC FIBER HANDHOLE 30x48x36

H-H= 30' 1'-1.25'

52+33

BELKNAP RD.

SEE PROJECT SHEET 4

811  
Non-emergency  
Call before you dig

0 25' 50' 75' 100'  
SCALE: 1"=100'

PROJECT INFORMATION OF CROWN CASTLE FIBER

LOC	FT. BEND COUNTY, TX
PROJECT	FT. BEND COUNTY N/A 5924
DRAWN BY	DAVID R. BEND COUNTY HO 01006A - SPAN 330 - FT. BEND COUNTY
DATE	01/28/18
ENGINEER	FCS
AS-BUILT	N/A
PAGE:	3
OF:	21









PROJECT SHEET 9

**PROJECT CONSTRUCTION NOTES**

1. ALL PROPOSED U/G CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE TEXAS CONSTRUCTION MANUAL AND ONE TYPICAL UNLESS OTHERWISE INDICATED.
2. ALL HAND HOLES ARE 24" DIA. UNLESS OTHERWISE INDICATED WITH 18" OF FIBER STACK LOOP.

**NOTE**  
 THE 14' SECTION OF THIS FIBER AND CONDUIT FROM THE HOME DEPOT TO THE B/C BANK IS A TYPICAL PRINT TO COMPLETE WITH UNDER SLAB.

**NOTE**  
 THE 24' SECTION OF THIS FIBER AND CONDUIT FROM THE HOME DEPOT TO THE B/C BANK IS A TYPICAL PRINT TO COMPLETE WITH UNDER SLAB.

PROJECT SHEET 9	OF 21
PROJECT INFORMATION OF CROWN FIBER CASTLE FIBER	
LOC	FT. BEND COUNTY, TX
PROJECT	FT. BEND COUNTY, TX
DESIGNER	THE SHERIDAN GROUP, INC. 200 S. 50TH ST. FT. BEND, TX 78703
DATE	07/29/18
ENGINEER	ENG. DESIGN
SCALE	N/A
AS-BUILT	N/A






**PROJECT CONSTRUCTION NOTES:**

1. ALL PORTIONS OF A CONSTRUCTION PROJECT SHALL BE SHOWN ON THE INDICATED DRAWING SHEET. A "NOT SHOWN" CALLOUT SHALL BE USED FOR PORTIONS OF THE PROJECT NOT SHOWN ON THIS SHEET.
2. ALL HOLE LOCATIONS SHALL BE INDICATED ON THIS SHEET WITH 100' OF FIBER TRACK LOOP.

**PROJECT SHEET 11**



FT. BEND COUNTY, TX PROJECT: FT. BEND COUNTY N/A - 2008-2009 DRAWING: 01/28/18 DATE: N/A ORIGINAL: N/A REVISION: N/A	
TITLE: HO 01008A - SPAN 330 - FT. BEND COUNTY	LOC: FT. BEND COUNTY, TX
DRAWN BY: J. B. BROWN, JR. N/A - 2008 CHECKED BY: J. B. BROWN, JR. N/A - 2008 DATE: 01/28/18 ENGINEER: J. B. BROWN, JR. N/A - 2008 DATE: N/A ORIGINAL: N/A REVISION: N/A	PROJECT: FT. BEND COUNTY N/A - 2008-2009 DRAWING: 01/28/18 DATE: N/A ORIGINAL: N/A REVISION: N/A
PROJECT SHEET 11 OF 21	PROJECT SHEET 11 OF 21

FOR FURTHER INFORMATION OF CROWN FIBER CASTLE



**PROJECT CONSTRUCTION NOTES**


1. ALL IMPROVED V/S CONSTRUCTION SHOWN IN RED ON THIS PLAN WILL BE CONSTRUCTION OF NEW PAVEMENT UNLESS OTHERWISE INDICATED.
2. ALL ROAD WIDTHS ARE 14' UNLESS OTHERWISE INDICATED WITH 100' OF 7.5% SLOPE LANE.

**PERMIT NOTES**

1. THE PERMIT FOR MARTINEZ ST. STOPS HERE. IF IS A DEAD-END ROAD.

**PERMIT NOTES**

1. THERE IS NO EXISTING ROAD IN THIS 2ND ST. BLOCK.



811 King Call Center Inc. logo

PROJECT: FT. BEND COUNTY, TX  
 PROJECT: FT. BEND COUNTY, TX  
 DRAWING: 150+79  
 DATE: 01/29/18  
 DESIGNED BY: EMD/DESIGN  
 CHECKED BY: N/A  
 ASSEMBLER: N/A

PROJECT: FT. BEND COUNTY, TX  
 PROJECT: FT. BEND COUNTY, TX  
 DRAWING: 150+79  
 DATE: 01/29/18  
 DESIGNED BY: EMD/DESIGN  
 CHECKED BY: N/A  
 ASSEMBLER: N/A

PROJECT: FT. BEND COUNTY, TX  
 PROJECT: FT. BEND COUNTY, TX  
 DRAWING: 150+79  
 DATE: 01/29/18  
 DESIGNED BY: EMD/DESIGN  
 CHECKED BY: N/A  
 ASSEMBLER: N/A

CONSTRUCTION NOTES

SEE PROJECT SHEET 11

150+79

PROJECT SHEET 12

OLD RICHMOND RD.

151+00 SEE PROJECT SHEET 11

PAUL ROAD

PROJECT SHEET 12

2ND ST.

MARTINEZ ST.

W. BELLFORT AVE.

2ND ST.

15009 OLD RICHMOND RD.

15919 OLD RICHMOND RD.

15911 OLD RICHMOND RD.

15411 W. BELLFORT ST.

15447 W. BELLFORT ST.

15302 W. BELLFORT ST.

15306 W. BELLFORT ST.

15307 W. BELLFORT ST.

15447 W. BELLFORT ST.

150+79





OLD RICHMOND RD.

TOMASA ST. (PRIVATE)


2ND ST.

**PROJECT CONSTRUCTION NOTES:**


1. ALL PROPOSED U/G CONSTRUCTION SHOWN IN RED ON THIS PLAN WILL INCLUDE BONDING THREE 1" X 1" HOPE INDUCTORS AND ONE FIBER COUPLER. SLEEVES OVERPASS REQUIRED.
2. ALL U/G CONSTRUCTION SHALL BE MARKED WITH 100' OF FIBER SLACK LOOP.

**CAUTION:**  
 EXISTING FIBER OPTIC NETWORK  
 16149 OLD RICHMOND RD.  
 15419 TOMASA ST.  
 16300 OLD RICHMOND RD.

PROJECT SHEET 14



TITLE: HO 01006A - SPAN 350 - FT. BEND COUNTY	
LOC: FT. BEND COUNTY, TX	
PROJECT NO.	HO 01006A
DATE	01/29/18
DESIGNER	ENG. D. S. BUI
DRAWING NO.	HO 01006A - SPAN 350 - 14
DATE	01/29/18
DESIGNED BY	D. S. BUI
CHECKED BY	N/A
AS-BUILT	N/A
PROJECT NO.	HO 01006A
DATE	01/29/18
DESIGNER	ENG. D. S. BUI
DRAWING NO.	HO 01006A - SPAN 350 - 14
DATE	01/29/18
DESIGNED BY	D. S. BUI
CHECKED BY	N/A
AS-BUILT	N/A



PROPRIETARY INFORMATION OF CROWN CASTLE FIBER

189+02 SEE PROJECT SHEET 14

OLD RICHMOND RD.

FAMILY LIFE CHRISTIAN FELLOWSHIP  
16425 OLD RICHMOND RD.

CHURCH ON THE ROCK  
16355 OLD RICHMOND RD.

PROJECT CONSTRUCTION NOTES

1. ALL PROPOSED U/G CONSTRUCTION SHALL BE INSTALLED IN ACCORDANCE WITH THE INDICATED BRAND, SIZE, 1" x 1" IDENTIFIERS AND ONE FIBER CABLE UNLESS OTHERWISE INDICATED.
2. ALL HAND HOLES ARE 24" x 24" x 10" UNLESS OTHERWISE INDICATED WITH 100' OF FIBER SLOTTED LOOP.

CAUTION  
ENERGY TRANSFER  
NATURAL GAS PIPELINE  
800-362-1965  
KINDER MORGAN TEXAS PIPELINE  
GAS PIPELINE  
800-453-0194

DORA LANE

193+80  
CC FIBER  
HANDHOLE  
4'x4'x3'

199+02  
CC FIBER  
HANDHOLE  
30"x48"x36"

H-H-806  
3'-1.25'

15418  
MCKASKIE  
RD.

15410  
MCKASKIE  
RD.


15402  
MCKASKIE  
RD.

15403  
DORA LANE

SEE PROJECT SHEET 16

206+01

# PROJECT SHEET 15



TITLE: HO 01008A - SPAN 330 - FT. BEND COUNTY	
LOCAL: FT. BEND COUNTY, TX	PROJECT: FT. BEND COUNTY, TX
FILE: BENT_BERQUE_146_706-5094	DATE: 01/29/18
DWG: FT. Bend County - HO 01008A - Span 330 - 1E	DRAWING DATE: 01/29/18
DESIGNED: N/A	CHECKED: N/A
DRAWN: N/A	IN CHARGE: N/A
APPR'D: N/A	DATE: N/A
AS-BUILT: N/A	N/A
	PAGE: 15 OF: 21
PROPRIETARY INFORMATION OF CROWN CASTLE FIBER	

CONSTRUCTION NOTES

**PROJECT CONSTRUCTION NOTES**


1. ALL PROPOSED U/P CONSTRUCTION SHOWN IS AND ON THE P&I WILL BE CONSIDERED AS PART OF THE PROJECT UNLESS OTHERWISE INDICATED.
2. ALL HOLE HOLES ARE 36" DIA. UNLESS OTHERWISE INDICATED WITH 100' OF FIBER STACK 100'.

**CONTRACTOR**  
 LINCOLN ELECTRIC  
 1000 S. W. 10TH ST.  
 MIAMI, FL 33135  
 800-367-1800  
 305-443-0100


**NOTE:**  
 THE 2ND SECTION OF THIS FORM COUNTY PERMITS STOPS HERE.




**PROJECT SHEET 16**




TITLE: HO 01008A - SPAN 330 - FT. BEND COUNTY	
LOG:	FT. BEND COUNTY, TX
PROJECT TITLE:	UNDEVELOPED
PROJECT NUMBER:	HO 01008A
DATE:	01/29/18
DRAWING DATE:	01/29/18
DESIGNER:	FCS
ENGINEER:	N/A
AS-BUILT:	N/A
PAGE:	16
OF:	21





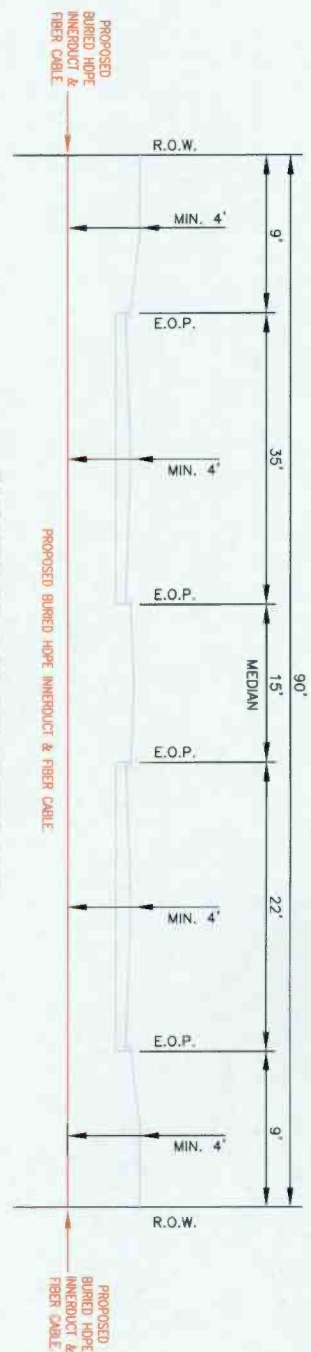

BURNEY RD. @ W. BELFORT AVE.  
LOOKING SOUTH

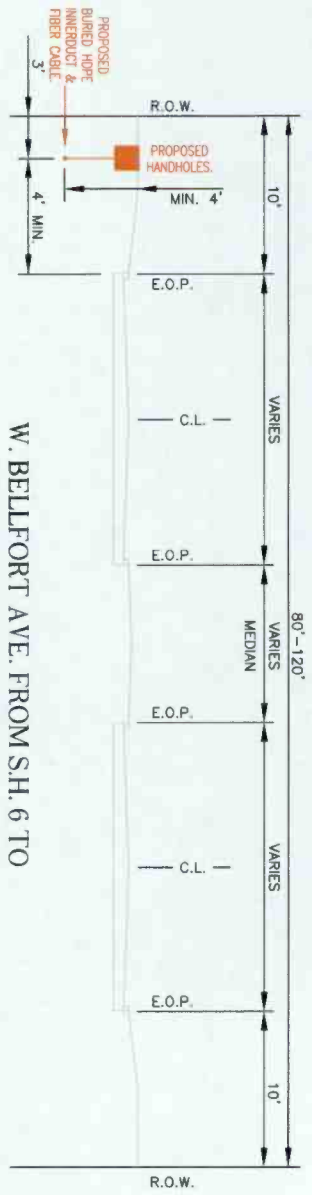




W. BELFORT AVE. FROM S.H. 6 TO  
OLD RICHMOND RD.  
LOOKING WEST

# PROFILE SHEET 2

TITLE: HO 01006A - SPAN 350 - FT. BRND COUNTY	
LOC: FT. BRND COUNTY, TX	
PROJECT: FT. BURNING	DATE: N/A
DRAWING: HO 01006A - SPAN 350 - FIB	DATE: 01/29/18
DESIGNER: RFS	DATE: N/A
CHECKER: N/A	DATE: N/A
AS-BUILT: N/A	DATE: N/A
PAGE: 18	
OF: 21	




PROFESSE THE INFORMATION OF CROWN CASTLE FIBER

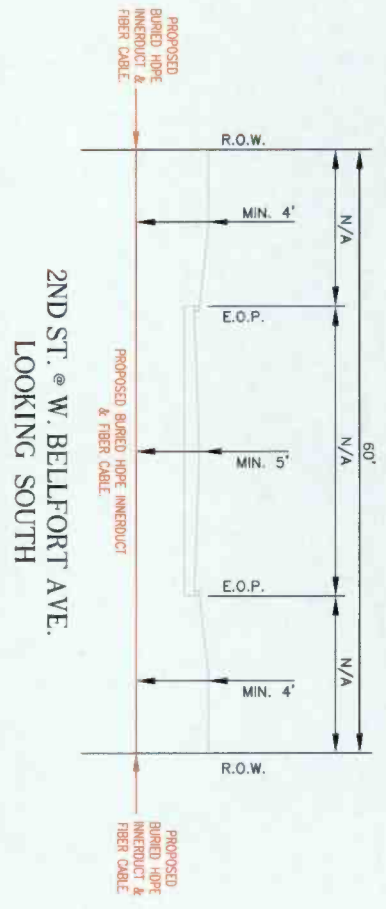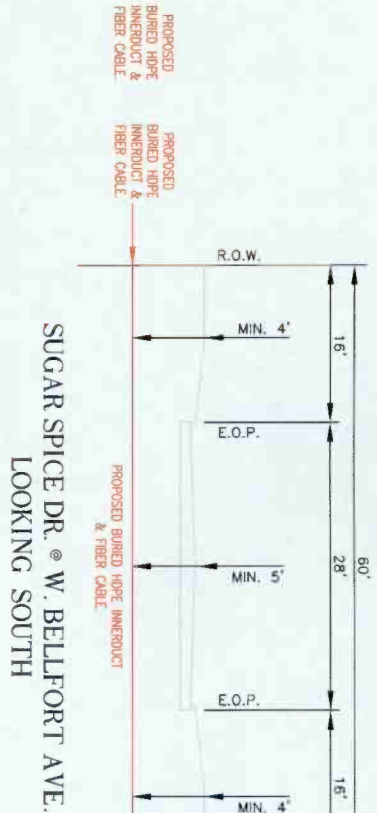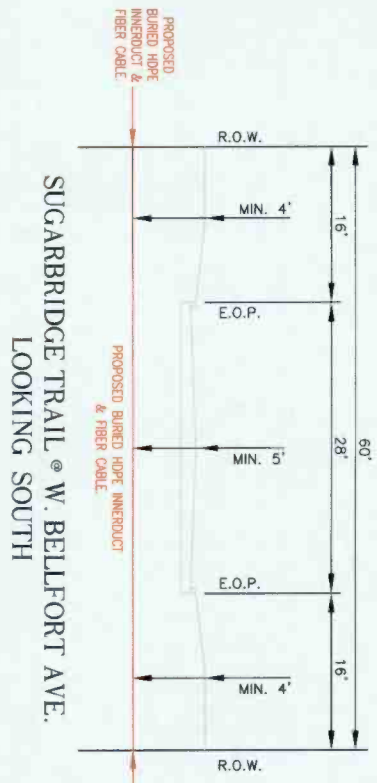

NOTE:  
THERE IS NO EXISTING ROAD  
IN THE 2ND ST. R.O.W.


# PROFILE SHEET 3

TITLE: HO 01006A - SPAN 330 - FT. BEND COUNTY	
LOC: FT. BEND COUNTY, TX	
PROJECT/FIG. BUILT BY: N/A	DATE: 01/29/18
DWG. NO: 01006A-SPAN 330 - FB	ENGINEER: E.S.
DATE: 01/29/18	DESIGNER: N/A
ORIGINATOR: N/A	ASSEMBLER: N/A
PAGE: 19	OF: 21




PROPRIETARY INFORMATION OF CROWN FIBER CASTLE


OLD RICHMOND RD. FROM W.  
BELLFORT AVE. TO DORA LN.  
LOOKING SOUTH

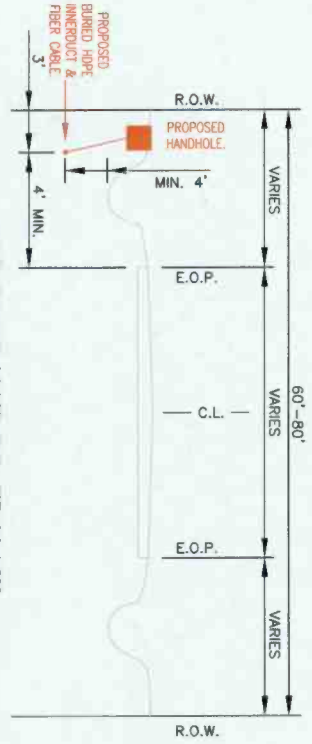

MARTINEZ ST. @ OLD RICHMOND RD.  
LOOKING EAST

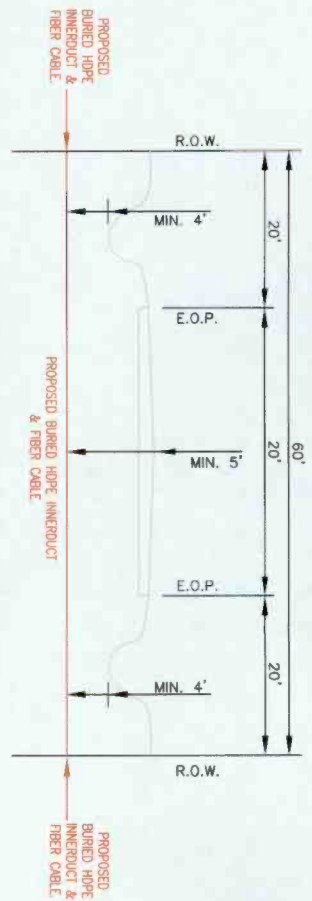

PAUL RD. @ OLD RICHMOND RD.  
LOOKING EAST

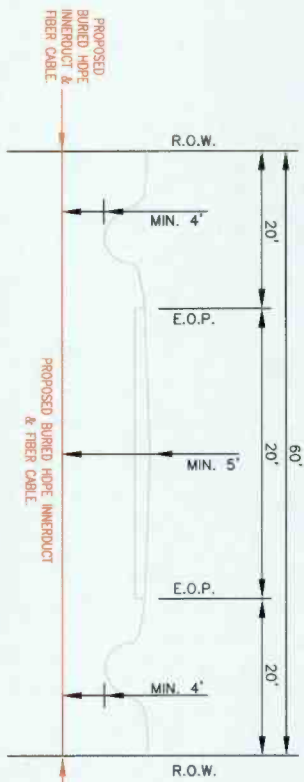


# PROFILE SHEET 4

TITLE: NO 010084 - SPAN 330' - FT. BEND COUNTY	
LOC:	FT. BEND COUNTY, TX
PROJECT:	FT. BEND COUNTY, N/A - 5984
DRAWN:	FT. Bend County - NO 010084 - SPAN 330' - FT
DATE:	01/28/18
DESIGNER:	ENGINEER
DATE:	01/28/18
AS-BUILT:	N/A
SCALE:	N/A
PAGE:	20
OF:	21




PROFILE MAY INFORMATION OF CROWN CASTLE FIBER


ADELFINA ST. @ OLD RICHMOND RD.  
LOOKING EAST

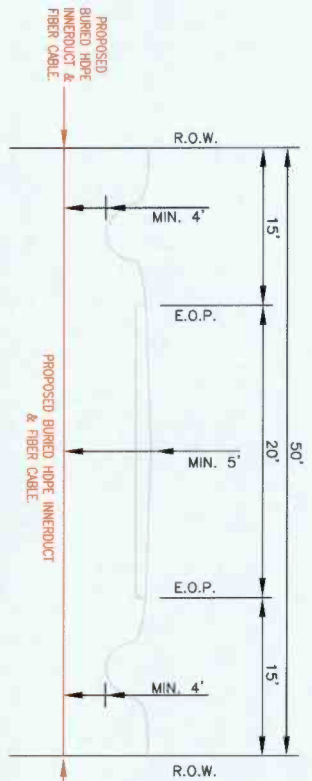

DORA LN. @ OLD RICHMOND RD.  
LOOKING EAST

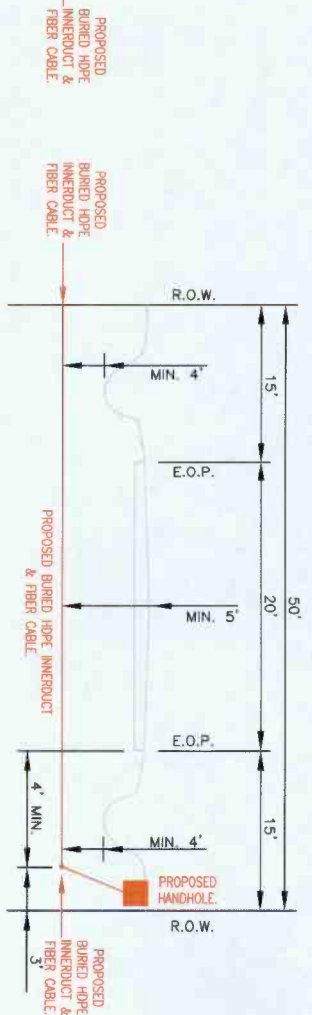


DORA LN. FROM OLD RICHMOND  
RD. TO END OF PROJECT  
LOOKING EAST

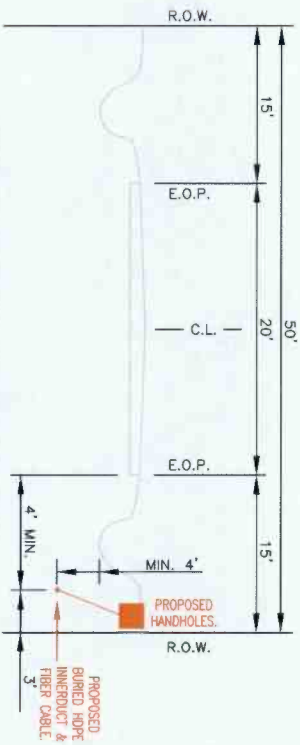

PROFILE SHEET 5

TITLE: HO 01006A - SPAN 330 - FT. BEND COUNTY	
LOG: FT. BEND COUNTY, TX	
PROJECT BUILDING: N/A	
PROJECT NUMBER: 46-200-01006A-SPAN 330 - TB	
DRAWING DATE: 01/29/18	
ORIGINAL DATE: N/A	
AS-BUILT DATE: N/A	
DESIGNER: FCS	
DRAWING: N/A	
SCALE: N/A	
PAGE: 21	
OF: 21	

PROPRIETARY INFORMATION OF CROWN CASTLE FIBER



**Notes for Figure 6H-1—Typical Application 1  
Work Beyond the Shoulder**

*Guidance:*

1. *If the work space is in the median of a divided highway, an advance warning sign should also be placed on the left side of the directional roadway.*

*Option:*



2. The ROAD WORK AHEAD sign may be replaced with other appropriate signs such as the SHOULDER WORK sign. The SHOULDER WORK sign may be used for work adjacent to the shoulder.
3. The ROAD WORK AHEAD sign may be omitted where the work space is behind a barrier, more than 24 inches behind the curb, or 15 feet or more from the edge of any roadway.
4. For short-term, short duration or mobile operation, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
5. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

6. **Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.**



Figure 6H-1. Work Beyond the Shoulder (TA-1)

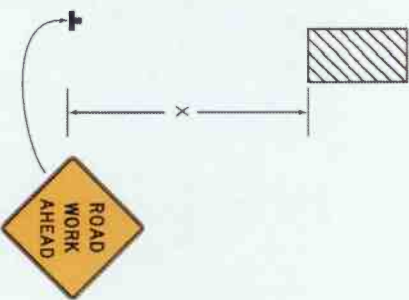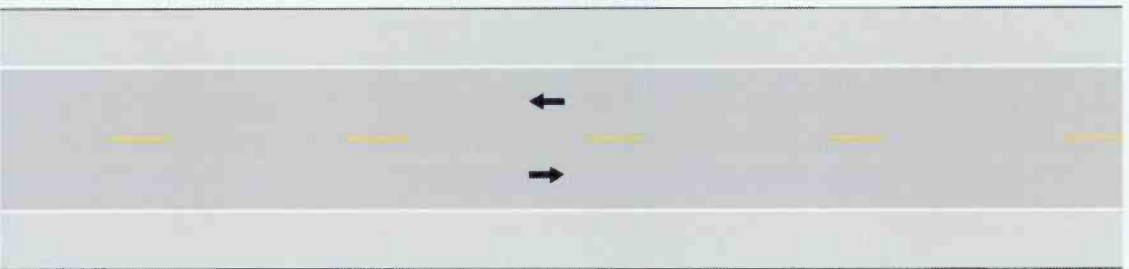

Note: See Tables 6H-2 and 6H-3 for the meaning of the symbols and/or letter codes used in this figure.

Typical Application 1



### Notes for Figure 6H-3—Typical Application 3 Work on the Shoulders

**Guidance:**

1. A **SHOULDER WORK** sign should be placed on the left side of the roadway for a divided or one-way street only if the left shoulder is affected.

**Option:**


2. The Workers symbol signs may be used instead of SHOULDER WORK signs.
3. The SHOULDER WORK AHEAD sign on an intersecting roadway may be omitted where drivers emerging from that roadway will encounter another advance warning sign prior to this activity area.
4. For short duration operations of 60 minutes or less, all signs and channelizing devices may be eliminated if a vehicle with activated high-intensity rotating, flashing, oscillating, or strobe lights is used.
5. Vehicle hazard warning signals may be used to supplement high-intensity rotating, flashing, oscillating, or strobe lights.

**Standard:**

6. Vehicle hazard warning signals shall not be used instead of the vehicle's high-intensity rotating, flashing, oscillating, or strobe lights.
7. When paved shoulders having a width of 8 feet or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.



Figure 6H-3. Work on the Shoulders (TA-3)

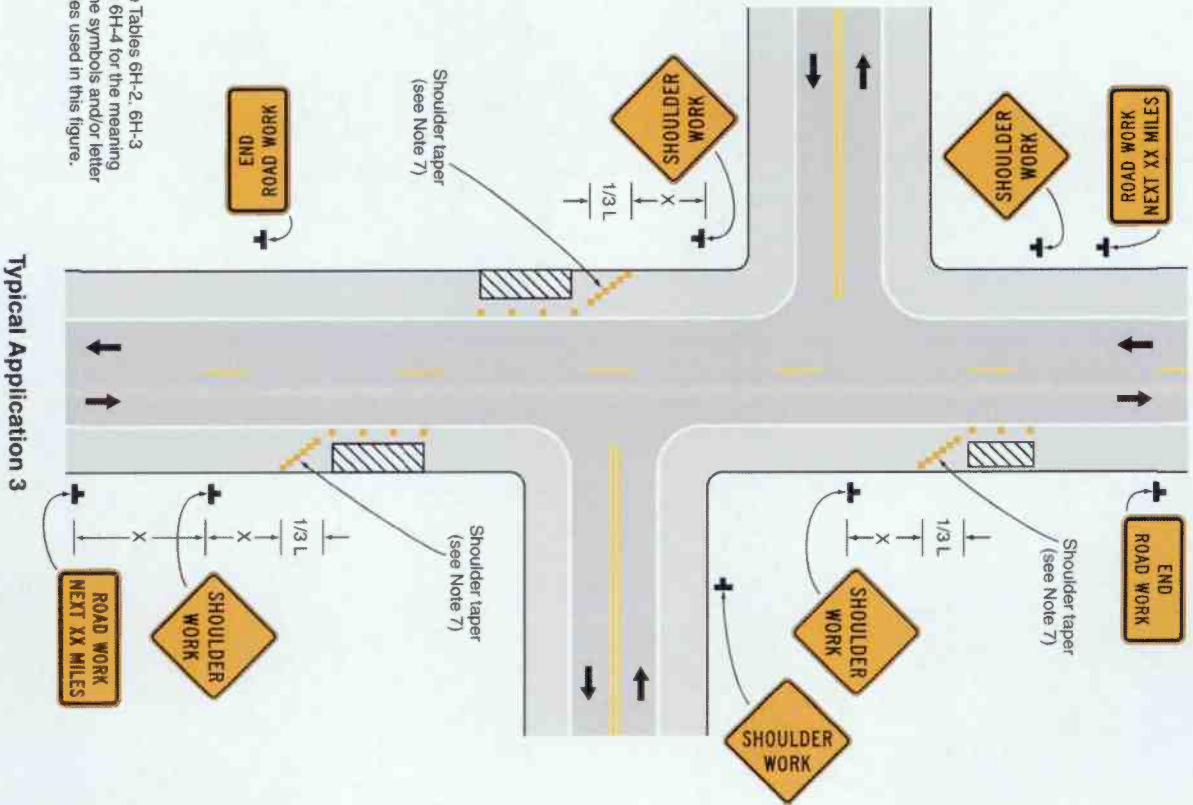

Note: See Tables 6H-2, 6H-3 and 6H-4 for the meaning of the symbols and/or letter codes used in this figure.

Typical Application 3