PLAT RECORDING SHEET

PLAT NAME:	AT NAME: Jordan Ranch Sec 31						
PLAT NO:							
ACREAGE:	23.346						
ACKEAGE.							
LEAGUE:	J.D. Vermillion Survey						
ABSTRACT NU	UMBER: A-339						
NUMBER OF BLOCKS: 2							
NUMBER OF I	LOTS: 73						
NUMBER OF F							
	ort Bend Jordan Ranch LP						
	At Bend 601 dan Runen Bi						
	·						
(DEPUTY CLERK)							

FURTHER, Owners have dedicated and by these presents do dedicate to the use of the public for public utility purpose forever unobstructed aerial easements. The aerial easements shall extend horizontally an additional eleven feet, six inches (11'6") for ten feet (10'0") perimeter ground easements or seven feet, six inches (7'6") for fourteen feet (14'0") perimeter ground easements or five feet, six inches (5'6") for sixteen feet (16'0") perimeter ground easements, from a plane sixteen feet (16'0") above the ground level upward, located adjacent to and adjoining said public utility easements that are designated with aerial easements (U.E. and A.E.) as indicated and depicted hereon, whereby the aerial easement totals twenty one feet, six inches (21'6") in width.

FURTHER, Owners have dedicated and by these presents do dedicate to the use of the public for public utility purpose forever unobstructed aerial easements. The aerial easements shall extend horizontally an additional ten feet (10'0") for ten feet (10'0") back-to-back ground easements, or eight feet (8'0") for fourteen feet (14'0") back-to-back ground easements or seven feet (7'0") for sixteen feet (16'0") back-to-back ground easements, from a plane sixteen feet (16'0") above the ground level upward, located adjacent to both sides and adjoining said public utility easements that are designated with aerial easements (U.E. and A.E.) as indicated and depicted hereon, whereby the aerial easement totals thirty feet (30'0") in width.

FURTHER, Owners do hereby declare that all parcels of land designated as lots on this plat are originally intended for the construction of single family residential dwelling units thereon (or the placement of mobile home subdivision) and shall be restricted for same under the terms and conditions of such restrictions filed separately.

FURTHER, Owners do hereby covenant and agree that all of the property within the boundaries of this plat is hereby restricted to prevent the drainage of any septic tanks into any public or private street, permanent access easement, road or alley or any drainage ditch, either directly or indirectly.

FURTHER, Owners do hereby dedicate to the public a strip of land twenty (20) feet wide on each side of the center line of any and all bayous, creeks, gullies, ravines, draws and drainage ditches located in said subdivision, as easements for drainage purposes. Fort Bend County or any other governmental agency shall have the right to enter upon said easement at any and all times for the purposes of construction and maintenance of drainage facilities and structures.

FURTHER, Owners do hereby covenant and agree that all of the property within the boundaries of this subdivision and adjacent to any drainage easement, ditch, gully, creek or natural drainage way shall hereby be restricted to keep such drainage ways and easements clear of fences, buildings, excessive vegetation and other obstructions to the operations and maintenance of the drainage facility and that such abutting property shall not be permitted to drain directly into this easement except by means of an approved drainage structure.

FURTHER, We do hereby certify that we are the owners of all property immediately adjacent to the boundaries of the above and foregoing plat of JORDAN RANCH SEC 31 where building setback lines or public utility easements are to be established outside the boundaries of the above and foregoing subdivision and do hereby make and establish all building setback lines and dedicate to the use of the public, all public utility easements shown in said adjacent acreage.

FURTHER, Owners do hereby acknowledge the receipt of the "Orders for Regulation of Outdoor Lighting in the Unincorporated Areas of Fort Bend County, Texas", and do hereby covenant and agree and shall comply with this order as adopted by Fort Bend County Commissioners Court on March 23, 2004, and any subsequent amendments.

IN TESTIMONY WHEREOF, JOHNSON JORDAN RANCH GP LLC, a Texas limited liability company, as general partner of FORT BEND JORDAN RANCH LP, a Texas limited partnership, has caused these presents to be signed by Stephen A. Sams, Vice President, this 12 day of May 2021.

> BY: FORT BEND JORDAN RANCH LP. a Texas Limited Partnership


By: JOHNSON JORDAN RANCH GP, LLC a Texas Limited Liability Company its General Partner

STATE OF TEXAS

COUNTY OF HARRIS

BEFORE ME, the undersigned authority, on this day personally appeared Stephen A. Sams, Vice President, known to me to be the person whose name is subscribed to the foregoing instrument and acknowledged to me that he executed the same for the purposes and considerations therein expressed and in the capacity therein and herein set out, and as the act and deed of said corporation.

GIVEN UNDER MY HAND AND SEAL OF OFFICE, this



I, Michael L. Swan, am authorized under the laws of the State of Texas to practice the profession of surveying and hereby certify that the above subdivision is true and accurate; was prepared from an actual survey of the property made under my supervision on the ground; that, except as shown all boundary corners, angle points, points of curvature and other points of reference have been marked with iron (or other objects of a permanent nature) pipes or rods having an outside diameter of not less than five eighths (5/8) inch and a length of not less than three (3) feet; and that the plat boundary corners have been tied to the Texas Coordinate System of 1983, South Central Zone.





I, John R. Herzog, A Professional Engineer licensed in the State of Texas do hereby certify that this plat meets the requirements of Fort Bend County to the best of my knowledge.



John R. Herzog, P.E.

This plat of JORDAN RANCH SEC 31 is approved by the City Planning and Zoning Commission of the City of Fulshear, Texas this

The plat of JORDAN RANCH SEC 31 was approved by the City of Fulshear Council on the 19 day of 3021 and signed on this _______, day of _______, 2021, provided; however, this approval shall be invalid, and null and void, unless this plat if filed with the County Clerk of Fort Bend, Texas within one (1) year hereafter.

1. The coordinates shown hereon are Texas South Central Zone No. 4204 State Plane Grid Coordinates (NAD83) and may be brought to surface by applying the combined scale factor of 1,00013.

2. BL indicates a building line AE indicates a aerial easement UE indicates a utility easement WSE indicates a water and sewer easement **VOL, PG indicates Volume, Page PRFBC** indicates Plat Records of Fort Bend County OPRFBC. indicates Official Public Records of Fort Bend County **ORFBC indicates Original Records of Fort Bend County** FBC OPRRP indicates Fort Bend County Official Public Records of Real Property **ESMT indicates Easement** HL & P indicates Houston Lighting and Power SQ FT indicates square feet AC indicates acre ROW indicates right-of-way

- indicates found 5/8" iron rod (unless otherwise noted) o indicates set 5/8" iron rod with plastic cap stamped "IDS" (unless otherwise noted)
- indicates street name change
- 3. All building lines along street rights-of-way are as shown on the plat.
- 4. All sidelot building lines to be 5' unless otherwise noted.
- 5. All non-perimeter easements on property lines are centered unless otherwise noted.
- 6. All bearings are based on the Texas Coordinate System of 1983, South Central Zone
- 7. The platted area is located within Zone X, defined as areas determined to be outside the 500 year floodplain, per FEMA Flood Insurance Rate Map Panel No. 48157C0020L, effective April 02, 2014.
- 8. This property lies within the extraterritorial jurisdiction of the City of Fulshear, Fort Bend County, Texas, Fulshear Municipal Utility District No. 3A and within County Assistance District (CAD) No. 7.
- 9. Sidewalks shall be built or caused to be built not less than 5 feet in width on both sides of all dedicated rights-of-way within said plat and on the contiguous right-of-way of all perimeter roads surrounding said plat, in accordance with the A.D.A.
- 11. The top of all floor slabs shall be a minimum of 147.90 feet above mean sea level (NAVD 88 Datum). In addition, no top of slab elevation shall be less than 2.0 feet above the Atlas 14 100-year water surface elevation of the receiving detention pond serving the proposed development, less than 2.0 feet above the proposed lowest top of curb elevation adjacent to the lot in which it lies, less than 4.0 feet above the pre-Atlas 14 100-year water surface elevation, or less than 2.0 feet above the pre-Atlas 14 500-year water surface elevation of the nearest impacting stream.
- 12. The drainage system for this subdivision is designed in accordance with the "Fort Bend County Drainage Criteria Manual" which allows street ponding with intense rainfall events.
- 13. All drainage easements are to be kept clear of fences, buildings, vegetation and other obstructions to the operation and maintenance by the drainage facility. All property is required to drain into the drainage easement through an approved drainage structure.
- 14. The Lighting Zone Code Is LZ3.
- 15. To the best of the engineer's knowledge, all existing pipeline easements within the subdivision are shown on the plat.
- 16. Absent written authorization by the affected utilities, all utility easements must be kept unobstructed from any non-utility improvements or obstruction by property owner. Any unauthorized improvements or obstructions may be removed by the utility at the property owner's expense.
- 17. Benchmark:

Elevations are based on Harris County Floodplain RM 190055, located on the east side of FM 1463, approximately 550' south of Corbitt Road, 15'± east of the power lines and 2'± off curb line of a driveway leading to a shopping center. Top of a stainless-steel rod inside an 8" PVC sleeve.

Note: The RM is now 3't below ground level.

NAVD88, 2001 Adj. Elevation = 136.32

- 18. Reserves A, B, C, D, E, F, and G within this plat will be owned by Fulshear M.U.D. No. 3A or the Jordan Ranch Community Association. Maintenance will be performed by either Fulshear M.U.D. No. 3A or the Jordan Ranch Community Association.
- 19. A minimum distance of 10' shall be maintained between residential dwellings.
- 20. Site plans shall be submitted to Fort Bend County and any other applicable jurisdiction for review and approval. Development Permits and all other applicable permits shall be obtained from Fort Bend County prior to beginning
- 21. The minimum distance of twenty-two (22) feet shall be maintained between a front facing garage and the edge of

BEING 23.346 acres of land in the J.D. Vermillion, Survey Abstract Number 339, Fort Bend County, Texas and being a portion of the 1352.43 acre tract described in the deed from The Massimo Fabio Silvestri Irrevocable Trust and The Rocco Paolo Silvestri Irrevocable Trust to Fort Bend Jordan Ranch LP recorded under File Number 2015027940 in the Official Public Records of Fort Bend County, Texas, and being more particularly described by metes and bounds as follows with bearings based on the Texas Coordinate System of 1983, South Central Zone:

COMMENCING at a 5/8-inch iron rod with cap stamped "IDS" found for the most southerly southeast corner of JORDAN RANCH STREET DEDICATION NO. 5 AND RESERVES according to the plat thereof recorded under Film Code No. 20200146, in the Official Plat Records of Fort Bend County, Texas, in the south right-of-way line of Jordan Crossing Boulevard (100' R.O.W.), from which a 5/8-inch iron rod with cap stamped "IDS" found for an angle corner of said JORDAN RANCH STREET DEDICATION NO. 5 AND RESERVES bears North 01° 50' 51" West - 100.00 feet;

THENCE North 82° 27' 09" East - 1843.42 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the most northerly northwest corner and POINT OF **BEGINNING** of the herein described tract:

THENCE across said 1352.43 acre tract, the following courses and distances:

North 87° 43' 34" East - 118.22 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a non-tangent curve to the left;

in a southeasterly direction, with said curve to the left, having a radius of 220.00 feet, a central angle of 90° 52' 32", a chord bearing and distance of South 47° 42' 27" East -313.50 feet, and an arc distance of 348.94 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said curve;

North 87° 53' 34" East - 933.64 feet to a 5/8-inch iron rod with cap stamped "IDS" set for an angle corner;

South 01° 56' 41" East - 832.59 feet to a 5/8-inch iron rod with cap stamped "IDS" set for an angle corner;

South 89° 35' 22" West - 262.02 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a curve to the right;

in a northwesterly direction, with said curve to the right, having a radius of 1765.00 feet, a central angle of 16° 25' 05", a chord bearing and distance of North 82° 12' 05" West - 504.03 feet, and an arc distance of 505.76 feet to a 5/8-inch iron rod with cap stamped "IDS" set for a point of compound

in a northwesterly direction, with said curve to the right, having a radius of 30.00 feet, a central angle of 91° 58' 54", a chord bearing and distance of North 28" 00' 06" West - 43.15 feet, and an arc distance of 48.16 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said curve;

North 71° 50' 40" West - 60.00 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a non-tangent curve to the right;

in a southwesterly direction, with said curve to the right, having a radius of 30.00 feet, a central angle of 92° 53′ 26″, a chord bearing and distance of South 64° 26' 04" West - 43.48 feet, and an arc distance of 48.64 feet to a 5/8-inch iron rod with cap stamped "IDS" set for a point of compound

in a northwesterly direction, with said curve to the right, having a radius of 800.00 feet, a central angle of 08° 28' 56", a chord bearing and distance of North 64° 52' 45" West - 118.32 feet, and an arc distance of 118.43 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said

North 60° 38' 17" West - 169.48 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a curve to the right;

in a northwesterly direction, with said curve to the right, having a radius of 1750.00 feet, a central angle of 10° 25' 03", a chord bearing and distance of North 55° 25' 46" West -317.75 feet, and an arc distance of 318.18 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said

North 50° 13' 14" West - 122.24 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a curve to the right;

in a northwesterly direction, with said curve to the right, having a radius of 30.00 feet, a central angle of 90° 00' 00", a chord bearing and distance of North 05° 13' 14" West - 42.43 feet, and an arc distance of 47.12 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said curve;

North 39° 46' 46" East - 17.04 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a curve to the left;

in a northeasterly direction, with said curve to the left, having a radius of 150.00 feet, a central angle of 11° 46' 46", a chord bearing and distance of North 33° 53' 24" East -30.78 feet, and an arc distance of 30.84 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the end of said curve;

North 28° 00' 01" East - 42.88 feet to a 5/8-inch iron rod with cap stamped "IDS" set for the beginning of a curve to the right;

DISTRICT NAMES

N/A

N/A

E.S.D. NO. 4

FUI SHEAR ET

CENTERPOINT

SIENERGY

FULSHEAR M.U.D. NO. 3A

LAMAR CONSOLOIDATED I.S.D.

CONSOLIDATED COMMUNICATIONS

COUNTY ASSISTANCE DISTRICT NO. 7


SCHOOL

IMPACT FEE AREA

CITY OR CITY ETJ

in a northeasterly direction, with said curve to the right, having a radius of 150.00 feet, a central angle of 10° 57′ 15″, a chord bearing and distance of North 33° 28' 38" East -28.63 feet, and an arc distance of 28.68 feet to a 5/8-inch iron rod with cap stamped "IDS" set for a point of reverse

in a northeasterly direction, with said curve to the left, having a radius of 530.00 feet, a central angle of 42° 23' 38", a chord bearing and distance of North 17° 45' 26" East -383.27 feet, and an arc distance of 392.15 feet to the POINT OF BEGINNING of the herein described tract and containing 23.346 acres of land.

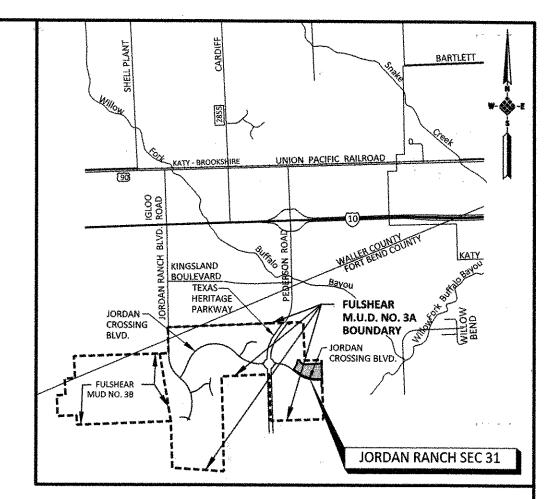

FORT BEND COUNTY KEY MAP NO. 483J VICINITY MAP

SCALE 1" = 5.000'

I, J. Stacy Slawinski, Fort Bend County Engineer, do hereby certify that the plat of this subdivision complies with all of the existing rules and regulations of this office as adopted by the Fort Bend County Commissioners' Court. However, no certification is hereby given as to the effect of drainage from this subdivision on the intercepting drainage artery or parent stream or on any other area or subdivision within the watershed

Fort Bend County Engineer

APPROVED by the Commissioners' Court of Fort Bend County, Texas, this ______ day of _______, 2021.

Vincent M. Morales, Jr.

Precinct 1, County Commissione

W.A. "Andy" Meyers Precinct 3, County Commission

K.P. George

Grady Prestage

Precinct 2, County Commissioner

Ken R. DeMerchant Precinct 4, County Commissioner

I, Laura Richard, County Clerk in and for Fort Bend County, hereby certify that the foregoing instrument with its

certificate of authentication was filed for recordation in my office on __ , 2021, at _____ o'clock _____M. Filed in plat number(s) ______ of the plat records of Fort Bend County, Texas.

Witness my hand and seal of office, at Richmond, Texas, the day and date last above written.

Laura Richard, County Clerk

Fort Bend County, Texas

JORDAN RANCH SEC 31

A SUBDIVISION OF

23.346 ACRES

J.D. VERMILLION SURVEY, A-339 FORT BEND COUNTY, TEXAS

2 BLOCKS 7 RESERVES

FORT BEND JORDAN RANCH LP 5005 RIVERWAY DRIVE, SUITE 500, HOUSTON, TEXAS 77056 (713) 960-9977



MAY 2021 IDS PROJECT NO. 2141-041-01 SHEET 1 OF 3


13430 NW. Freeway

Houston, Tx. 77040

TxEng Firm 2726 TxSurv Firm 10110700

713,462,3178

Suite 700

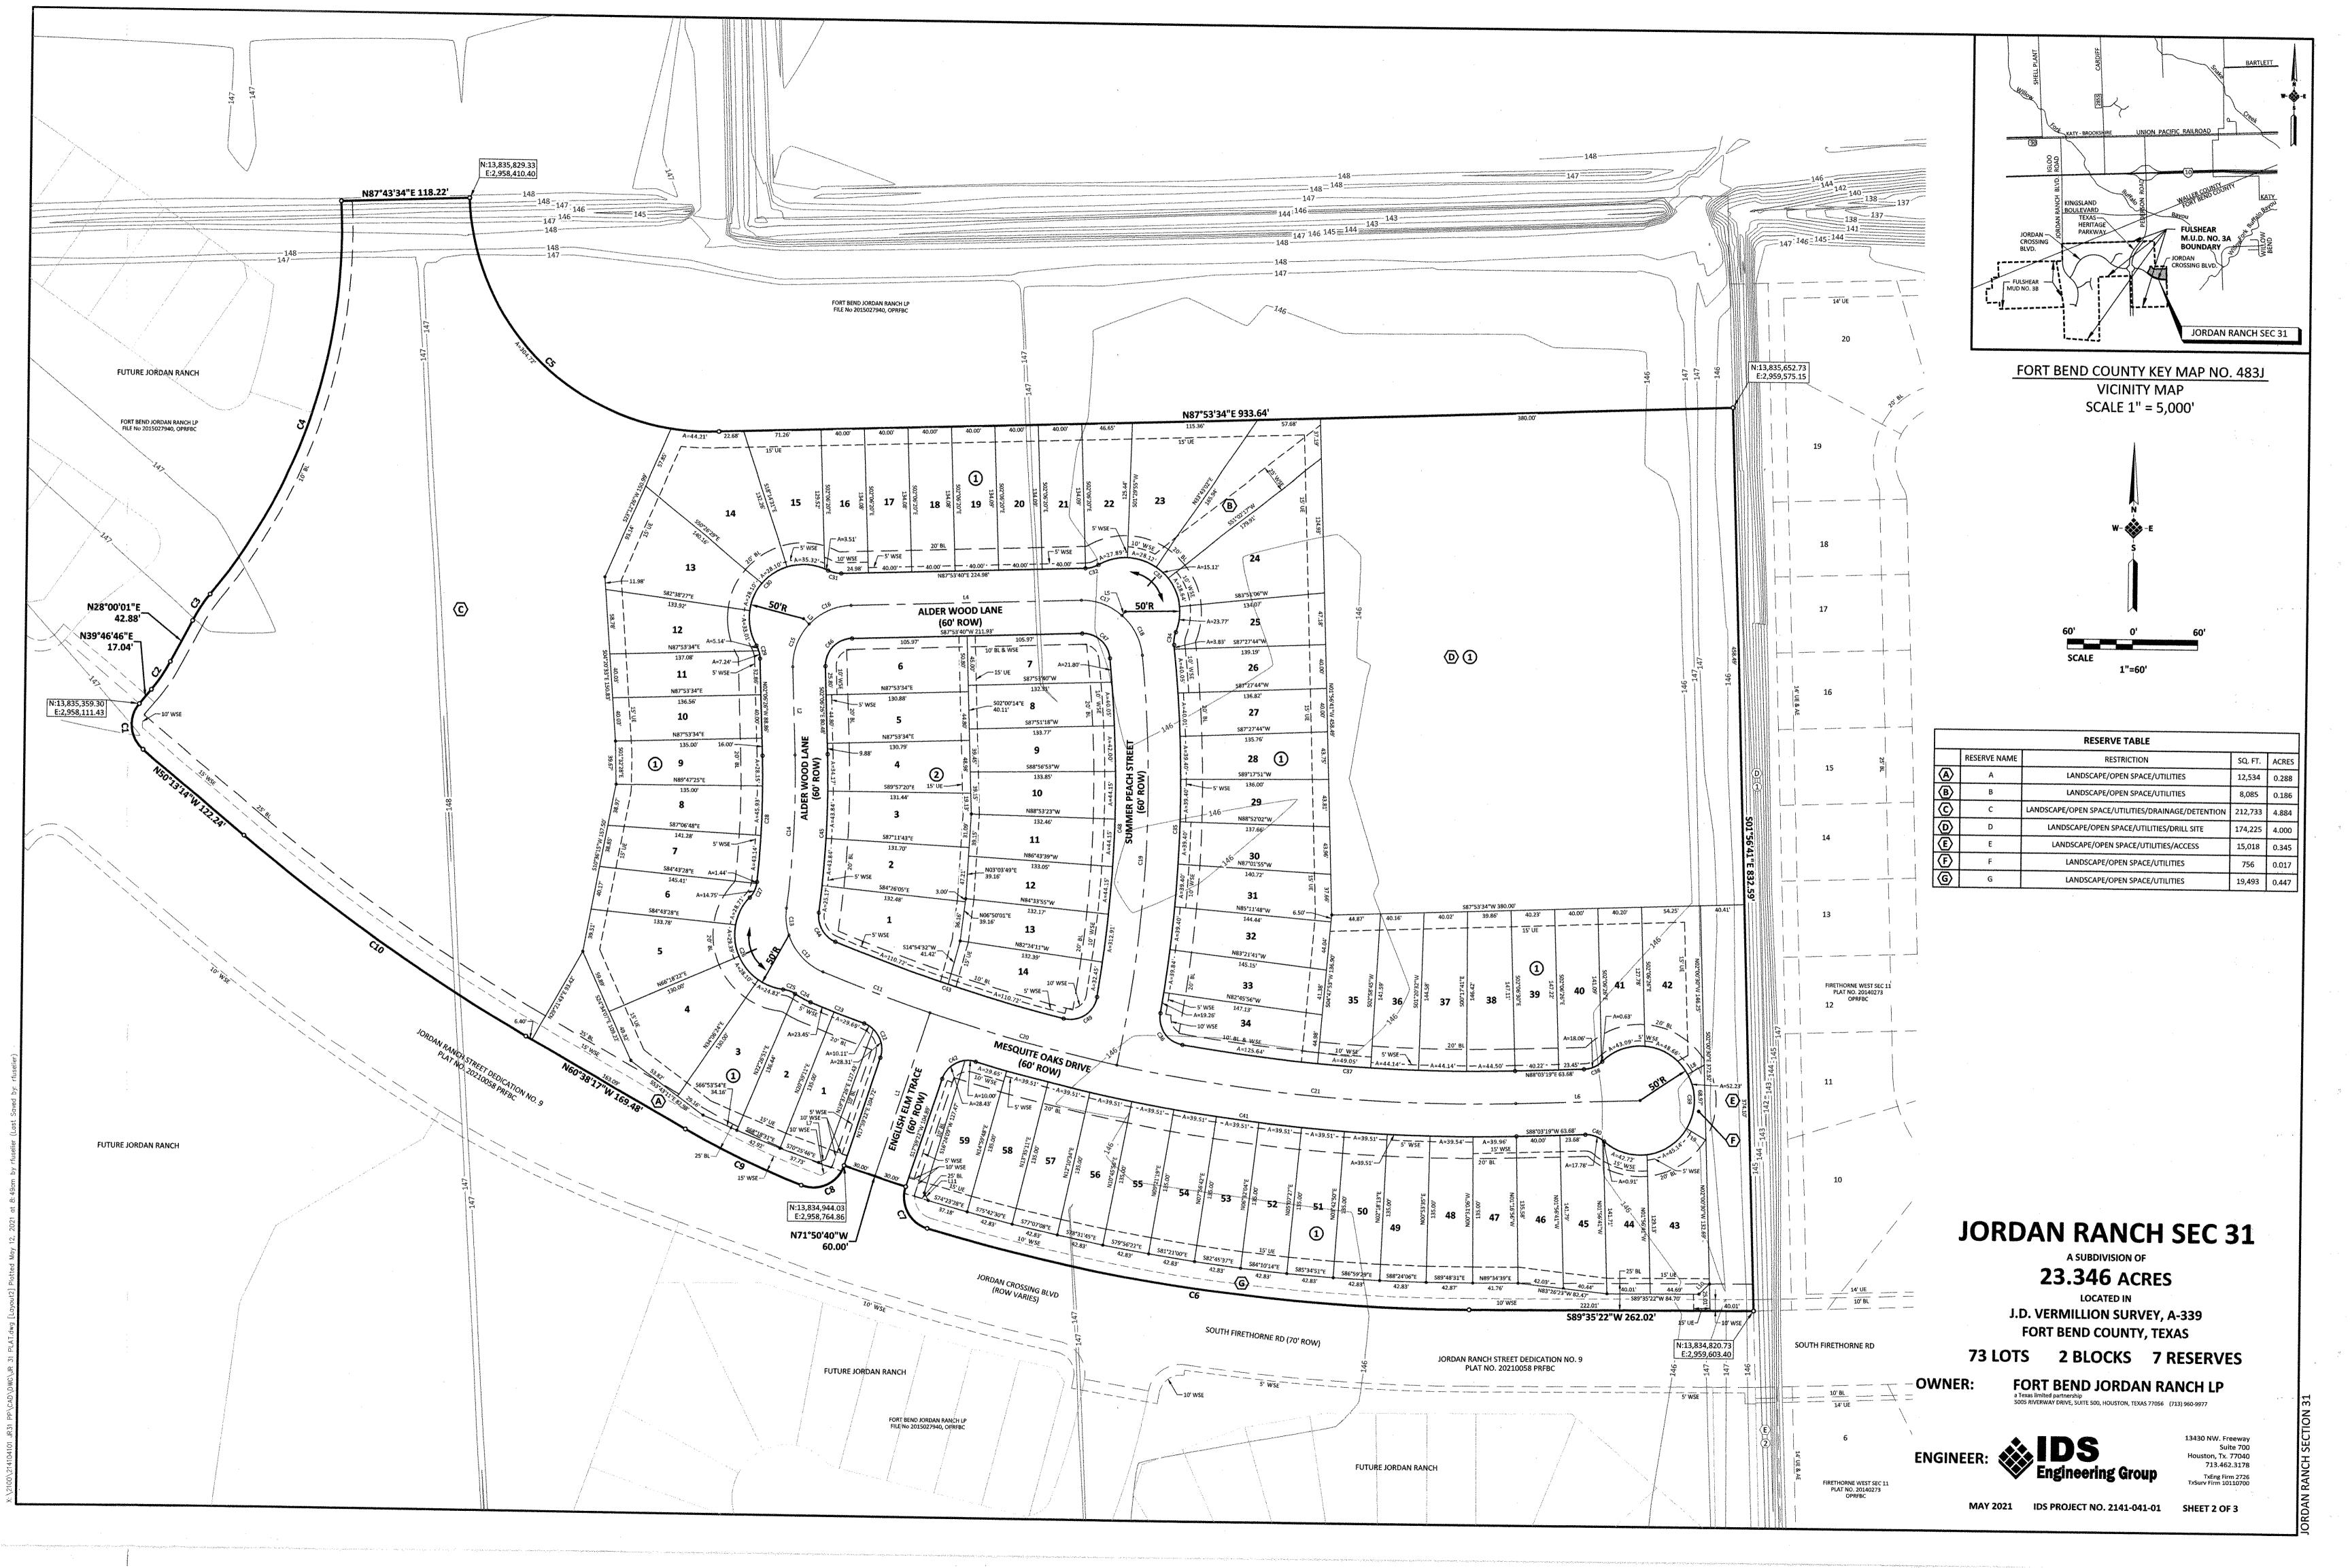

~1 164 1·	rei - A	DARWIN	CUR	TANGENT	CHORD BEARING	CHORD DISTANCE
CURVE	DELTA	RADIUS 20.00	LENGTH		N05°13'14"W	42.43'
C1	90°00'00"	30.00'	47.12' 30.84'	30.00' 15.47'	N33°53'24"E	30.78'
C2	11*46'46"	150.00'	28.68	14.38'	N33°28'38"E	28.63
C3	10°57'15" 42°23'38"	150.00' 530.00'	392.15	205.54	N17°45'26"E	383.27
C4	90°52'32"	220.00	348.941	223.39'	S47°42'27"E	313.50'
C5				254.62'	N82°12'05"W	504.03'
C6	16°25'05"	1,765.00'	505.76'		N28°00'06"W	43.15'
C7	91°58'54"	30.00'	48.16'	31.06' 31.55'	S64°26'04"W	43.48'
C8	92°53'26"	30.00'	48.64' 118.43'	59.32	N64°52'45"W	118.32'
C9	8°28'56"	800.00'		159.53'	N55°25'46"W	317.75'
C10	10°25'03"	1,750.00'	318.18'		S70°05'43"E	105.28'
C11	3°49'50"	1,575.00'	105.30'	52.67'		<u> </u>
C12	49°07'43"	55.00'	47.16'	25.14'	\$43°36'57"E	45.73'
C13	26°12'05"	55.00'	25.15'	12.80'	S05°57'02"E	24.93'
C14	9°15'26"	880.00'	142.18'	71.25'	S02°31'17"W	142.03'
C15	45°00'03"	55.00'	43.20'	22.78'	\$20°23'36"W	42.10'
C16	45°00'03"	55.00'	43.20'	22.78'	N65°23'39"E	42.10'
C17	42°29'05"	55.00'	40.78'	21.38'	S70°51'48"E	39.85'
C18	43°29'00"	55.00'	41.74'	21.93'	S27°52'45"E	40.75'
C19	18°06'18"	1,200.00'	379.19'	191.19'	S02°54'54"W	377.62'
C20	6°29'19"	1,575.00'	178.37	89.28'	N75°15'18"W	178.27'
C21	13°26'43"	1,575.00	369.60'	185.65'	N85°13'19"W	368.75'
C22	88°03'59"	25,00'	38.43'	24.17'	N26°02'38"W	34.75'
C23	1°53'49"	1,605.00	53.14'	26.57'	N69°07'43"W	53.14'
C24	10°51'39"	85.00'	16.11'	8.08'	N62°44'59"W	16.09'
C25	27°00'44"	25.00'	11.79'	6.00'	N70°49'31"W	11.68'
C26	127°12'47"	50.001	111.01'	100.75'	N20°43'30"W	89.58'
C27	37°05'13"	25.00'	16.18'	8.39'	N24°20'17"E	15.90'
C28	7°54'06"	850.00'	117.23	58.71'	N01°50'37"E	117.13'
C29	28°21'27"	25.00'	12.37'	6.32'	N16°17'10"W	12.25'
C30	146°43'01"	50.00'	128.03'	167.28'	N42°53'37"E	95.81'
C31	28°21'27"	25.00'	12.37'	6.32'	S77°55'36"E	12.25'
C32	28°21'27"	25.00'	12.37'	6.32'	N73°42'56"E	12.25'
C33	141°33'04"	50.00'	123.53'	143.38'	S49°41'15"E	94.42'
C34	27°32'00"	25.00'	12.01	6.13'	S07°19'16"W	11.90'
C35	15°50'13"	1,230.00	339.98'	171.08'	S01°28'23"W	338.90'
C36	89°56'02"	25.00'	39.24'	24.97	S35°34'32"E	35,33'
C37	11°24'08"	1,545.00'	307.46	154.24'	S86°14'37"E	306.96'
C38	42°50'00"	25.00'	18.69'	9.81'	N66°38'19"E	18.26'
C39	265°40'01"		231.84'	53.93'	S01°56'41"E	73.33'
C40	42°50'00"	25.00'	18.69'	9.81'	N70°31'41"W	18.26'
C40 C41	18°00'01"	1,605.00'		1	N82°56'40"W	502.16'
C41 C42	88°03'59"	25.00'	38.43'	24.17'	S62°01'21"W	34.75'
- Andrews		1,545.00		1	S72°17'10"E	221.25'
C43	8°12'43"	25.00	32.87	19.30'	S30°30'54"E	30.55'
C44	75°19'48"	910.00'	147.03		S02°31'17"W	146.87'
C45	9°15′26″		39.27	25.00	S42°53'37"W	35.36'
C46	90°00'06"	25.00'	39.27	23.30'	N49°07'18"W	34.09'
C47	85°58'05"					
C48	15°19'24"	1,170.00			N01°31'27"E	311.97'
C49	94°25'20"	25.00	41.20	27.01'	N56°23'49"E	36.69'

LINE TABLE							
LINE	BEARING	LENGTH					
L1	S17°59'22"W	158.88'					
L2	S02°06'26"E	80.48'					
L3	S47°06'23"E	7.23'					
L4	N87°53'40"E	211.93'					
L5	S40°22'45"W	4.66'					
L6	S88°03'19"W	114.67'					
L7	N64°34'34"E	7.07'					
L8	S60°22'03"W	17.48'					
L9	S59°47'06"E	20.66'					
L10	N43°43'48"E	13.93'					
L11	S28°35'51"E	7.80'					

JORDAN RANCH SEC 31

A SUBDIVISION OF 23.346 ACRES

LOCATED IN
J.D. VERMILLION SURVEY, A-339

FORT BEND COUNTY, TEXAS 73 LOTS 2 BLOCKS 7 RESERVES

OWNER:

FORT BEND JORDAN RANCH LP a Texas limited partnership 5005 RIVERWAY DRIVE, SUITE 500, HOUSTON, TEXAS 77056 (713) 960-9977

