

PERFORMANCE TRUCK - BROOKSHIRE

25M

34211 Katy Freeway, Brookshire, Texas 77423

Phone: (281) 239-7383

BUYER'S ORDER

Date Prepared: 08-31-2022		Delivery Date: *TBD	Salesman: Drew Vest	Branch: Brookshire
Purchaser: Fort Bend County		Telephone: 281-342-6185 Fax:		
Mailing Address: 201 Payne Lane City: Richmond State: TX Zip: 77469				County: Fort Bend
Physical Address: 201 Payne Lane City: Richmond State: TX Zip: 77469				County: Fort Bend
Description: NEW 2024 KENWORTH T480		Email Address: mike.starkey@fortbendcountytexas.gov		
Mileage:	Color: L0006 White	NOTE: Sales tax and license fee may apply but are not included in this quote.		
VIN: TO ORDER Comments: See attached vehicle summary, quote ID # QUO-897304-N2N3V8.				
Purchaser's Agent: Mike Starkey		Title: GM Fleet Operations	License Type: Commercial	Account # FBC

LICENSE - TITLE INFORMATION

Months: 12	Tractor:	Truck: X	Trailer:	Body Type: N/A	Color: BLU	Tons:	GCW: 56000
Apportioned:	IMC #	Combination:	Com'l: X	Token Trailer:	Gas:	Diesel: X	

INSURANCE INFORMATION

AGENCY:	SELLING PRICE*	139,814.80
NAME:	PHONE:	ETNYRE 3500 GALLON DISTRIBUTOR
		183,258.00

LIEN INFORMATION

NAME:	LIEN DATE:	CASH PRICE W/ACCESS.	323,072.80
ADDRESS:	PHONE:	TRADE IN ALLOWANCE	-
CITY, STATE, ZIP:		NET CASH DIFFERENCE	323,072.80
COMMENTS:		FEDERAL RETAIL EXCISE TAX	-
AMOUNT:	NAME:	NET PRICE	323,072.80

ADDITIONAL INFORMATION

This proposal is for 1 unit for ASAP build, FOB - Brookshire, TX.	LICENSE MO. & FEE	-
New Kenworth T480 Straight Truck	TITLE FEE (INCLUDES \$5 TAG FEE)	5.00
Paccar PX9 Engine - 350 HP	COMMERCIAL INSPECTION FEE	40.00
Fuller RTO14908LL 10 Spd Transmission	DEALER'S INVENTORY TAX	739.84
Buy Board Fee included (Contract 601-19 and 597-19)	DOCUMENTARY FEE**	75.00
	EXTENDED WARRANTY	3,575.00
	SUBTOTAL	327,507.64
	BALANCE OWED ON TRADE	-
	SUBTOTAL	327,507.64
Ext Wty for 5 yrs/100k miles on Engine, Aftertreatment & KW Basic Vehicle.	PREPAYMENT	-
*Build/Delivery dates to be determined.	BALANCE DUE UPON DELIVERY	327,507.64

DISCLAIMER OF WARRANTY

Any warranties on the products sold hereby are those made by the manufacturer. The seller, CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER, hereby expressly disclaims all warranties, either express or implied, including any implied warranty of merchantability or fitness for a particular purpose, and CLEVELAND MACK SALES, INC., PERFORMANCE TRUCK OR PERFORMANCE TRAILER neither assumes nor authorizes any other person to assume for it any liability in connection with the sale of said products.

*** PRICE IS SUBJECT TO INDUSTRY AND ENVIRONMENTAL COST IMPACTS BEYOND THE CONTROL OF PERFORMANCE TRUCK**

** A DOCUMENTARY FEE IS NOT AN OFFICIAL FEE. A DOCUMENTARY FEE IS NOT REQUIRED BY LAW, BUT MAY BE CHARGED TO BUYERS FOR HANDLING DOCUMENTS RELATING TO THE SALE. A DOCUMENTARY FEE MAY NOT EXCEED A REASONABLE AMOUNT AGREED TO BY THE PARTIES. THIS NOTICE IS REQUIRED BY LAW.

Vehicle(s) are subject to prior sale and will not be held more than five working days.

PURCHASER _____

THIS ORDER NOT BINDING UNTIL ACCEPTED BY DEALER.

SALESPERSON _____

ACCEPTED BY _____



PERFORMANCE TRUCK - CLEVELAND (C359)
 1287 HIGHWAY 59 NORTH
 CLEVELAND, Texas 77328

FORT BEND COUNTY
 201 PAYNE LANE
 RICHMOND, Texas 77469
 United States of America

Drew Vest
 Cell Phone: 281-610-8007
 Office Phone: 713-844-7111
 Email: avest@performancetruck.com

Vehicle Summary

	Unit		Chassis	
Model:	T480 Series Conventional	Fr Axle Load (lbs):		16000
Type:	FULL TRUCK	Rr Axle Load (lbs):		40000
Description 1:	T480 Straight Trk	G.C.W. (lbs):		56000
Description 2:	Etnyre			
	Application	Road Conditions:		
Intended Serv.:	Local pickup & delivery: Vehicles which	Class A (Highway)		90
Commodity:	Liquid petroleum products.	Class B (Hwy/Mtn)		10
	Body	Class C (Off-Hwy)		0
Type:	Tank.	Class D (Off-Road)		0
Length (ft):	15	Maximum Grade:		6
Height (ft):	13	Wheelbase (in):		208
Max Laden Weight (lbs):	4000	Overhang (in):		120
		Fr Axle to BOC (in):		69.5
		Cab to Axle (in):		138.5
	Trailer	Cab to EOF (in):		258.5
No. of Trailer Axles:	0	Overall Comb. Length (in):		368
Type:				
Length (ft):	0			
Height (ft):	0	Special Req.		
Kingpin Inset (in):	0	U.S. Domestic registry, 50-state.		
Comer Radius (in):	0			
	Restrictions			
Length (ft):	75			
Width (in):	102			
Height (ft):	13.5			

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/Opt	Description	Weight
Model			
0000480	S	T480 Series Conventional	10,386
0071000	O	T480 Aero Hood	0
0080075	O	Dealer/Customer declines engine w/CARB Idle Emissions Reduction Feature.	0
0090162	O	T480 Tandem	0
0098443	O	State of Registry: Texas	0
Engine & Equipment			
0130208	O	PX-9 350 350@1750 1050@1200, 2021 With Turbo Exhaust Brake (VGT Brake). N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (N202 N09360 C400 252...Reserve Speed Function Reset N09200 C399 120...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (N20 N09220 C402 0.....Expiration Distance (N207) N09540 C395 0.....Expiration Distance (N209) N09260 C121 68....Max Vehicle Speed in Top Gea N09440 C234 YES...Engine Protection Shtdwn N09460 C231 NO....Gear Down Protection N09580 C133 5.....Idle Shtdwn Time N09680 C233 NO....Idle Shtdwn Override N09480 C132 1400..Max PTO Speed N09300 C128 68....Max Cruise Control Speed N09500 C239 NO....Cruise Control Auto Resume N09520 C238 NO....Auto Engine Brake in Cruise N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold N09560 C225 YES...Enable Idle Shutdown Park Br	0
1000046	O	EPA Emissions Warranty Engine	0
1000151	S	PremierSpec	0
1000244	O	Gearing Analysis: Balance power/economy blend results.	0
1000254	O	Customer's Typical Operating Spd: 65 mph.	0
1000684	O	Effective VSL Setting NA	0

Sales Code	Std/Opt	Description	Weight
1000858	O	Engine Idle Shutdown Timer Disabled	0
1000859	O	Enable EIST Ambient Temp Overrule	0
1000891	O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0
1002060	S	Air compressor: Cummins 18.7 CFM For Cummins And PACCAR PX engines.	0
1041399	S	Air Cleaner: MD Composite Engine Mounted	0
1098003	S	Air Restriction Indicator: Mechanical Mounted on Air Cleaner.	0
1105231	S	Fan Hub: Horton On/Off for PX-9 or L9N	0
1121231	S	Cooling Module: 2.1M MD - Aero Hood 1000 Square Inches	0
1160205	O	Bugscreen Front of grille on 2.1M MD, C500 ,T800, T880, and W900. Behind grille on T680 and 1.9M MD.	2
1247229	S	EXH: 2021 RH Under DPF/SCR with RH Horizontal tailpipe below rail	0
1321102	S	Fuel Filter: PACCAR 2.1M MD for PX-7 or PX-9 Fuel/water separator for 2021 and later engines.	0
1321200	S	Run Aid:None *For Fuel Filter	0
1321300	S	Start Aid:None *For Fuel Filter	0
1500029	O	Kenworth Fuel Cooler Required for Cummins engines with a single fuel tank. Required for PACCAR MX-13 engine with a single fuel tank and stationary use: High RPM, low vehicle speed, sustained for longer than 1 hour. Optional for all other applications.	0
1816200	O	Alternator: SEG 200 amp, brush type Formerly Bosch.	0
1821275	O	Batteries: 3 AGM GP31 THR (925) 2775 CCA. For T680, T880, or W990 in cab battery box only.	62
1836106	S	Mitsubishi 105P55 12V Starter with Cummins and PX PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded. Only for Cummins or PX engines.	0
1900996	O	Jump start terminals under hood.	0
1901019	O	Remote PTO/Throttle, 12-Pin, 250K End of Frame, J1939, Remote Control Provision	0

Transmission & Clutch



Sales Code	Std/Opt	Description	Weight
2057371	O	Transmission: Fuller RTO14908LL 10-speed. Standard with synthetic lubricant. Includes severe-duty pilot bearing on all class 8 models. *Torque Limit: 1450 pound-feet.	0
2240025	O	Clutch: Eaton 14" 1 Plate Ceramic Dampened Up to 660 LBFT Engine torque	0
2406452	O	Driveline: 2 Dana SPL170XL 1 centerbearing	17
2410114	U	Left hand Pto access, right hand dip stick tube	0
2410311	U	Decline Allison Neutral at Stop Stand-Alone	0
Front Axle & Equipment			
2517016	O	Meritor MFS20 Front Axle rated 16K 3.5 in. drop, standard track.	0
2641137	O	Front Brakes: 20K Meritor Q-Plus 16.5x6 in.	-38
2690032	O	Front Brake Drum: Tru Turn Lite 16.5X6, max rating 20K	80
2702018	O	Front Hubs Iron hub pilot 18,000 lbs. 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	80
2741970	S	ConMet PreSet Plus Hub package; front axle.	0
2750001	S	Hubcap: front vented.	0
2765001	S	Front Auto Slack Adjuster.	0
2864074	O	Front Springs: Taperleaf 16K w/ shock absorbers w/ maintenance-free elastomer spring pin bushings.	76
2895300	O	Dual power steering gears: 16K.	75
2899336	O	Power Steering Cooler:Radiator Mounted Air-to-Oil	11
2900055	O	5 mm front suspension spacer block.	0
2900612	O	Threaded front spring bushings in place of elastomeric.	0
Rear Axle & Equipment			
3124403	O	Dual Dana Spicer DSP41 rear axle rated at 40K. (DSP40 w/ heavy-wall housing) w/ 11mm housing and 1.88in. shaft diameter. Tandem rear axles.	1,991
3200463	O	Rear Axle Ratio - 4.63.	0
3354004	O	Dual Rear Brakes 16-1/2x7 in. to 46K; Meritor Q-Plus S-cam stamped spider.	16
3392005	O	Dual Rear Brake Drums: cast.	0
3407046	O	Longer studs for aluminum wheels w/ steel hub	6

Price Level: January 1, 2022

Deal: T480 Straight Trk

Printed On: 8/29/2022 9:16:48 AM

Date: August 29, 2022

Quote Number: QUO-897304-N2N3V8



Sales Code	Std/Opt	Description	Weight
		pilot wheels.	
3407050	O	Dual Rear Hubs: Aluminum hub pilot 46K 11-1/4 in. bolt circle.	0
3441972	O	ConMet PreSet Plus Hub package; dual rear axle.	0
3465002	O	Dual Rear axle automatic slack adjusters.	0
3485207	O	Spring Brake: 3030 long stroke dual 30 square inches travel. Helps keep brakes in adjustment longer.	4
3495226	S	Bendix 4S/4M anti-lock brake system.	0
3500057	O	Interaxle Driveline: 1 Dana SPL170XL Tandem Rear Axles Only	96
3532130	O	Wheel Differential Lock for Dana Spicer axles DSP40/DSP41(P)/DSH40(P)/DSH44(P)/D40-155 forward rear axle & rear rear. Under Speed Interlock is standard on T680.	37
3737455	O	Rear suspension: Tandem Hendrickson RT403 40K. 52 in. axle spacing, 7.19 in. saddle height w/barpin bushing. Unladen Height: 10.7 in. Laden Height: 9.7 in. Advertised axle spacing for this rear suspension is a nominal value. Actual spacing may be up to two inches greater than noted. This is important in situations where the body is likely to be pre-built before the chassis is delivered. Tire to body or bracket to body interference may be encountered. Communicate clear space requirements on the sales order. DSP40/P rear axles are not for use with Hendrickson HAS 402, Hendrickson Primaax, or Hendrickson beam-type rear suspensions. Hendrickson RT403 rear suspension for use with tandem axles up to 46K on T8 series. Hendrickson RT403 rear suspension requires bronze center bushings when used in refuse loader or packer applications.	461
3832315	O	Bolted rear suspension crossmembers for RT403 or HAS402. Replaces medium duty standard.	0
Tires & Wheels			
4077537	O	Front tires: Bridgestone M870 315/80R22.5 20PR All Position	94
4238736	O	Rear tires: Goodyear Fuel Max RSA 11R22.5 14PR	0
4900008	O	Rear Tire Quantity: 8	0
5042367	O	Front Wheel: Accuride 29300 22.5x9 steel Steel Armor[™] powder coat, hub-pilot mount, 10000lb. maximum rating, 5-hand holes. Not air disc brake compatible.	79
5242389	O	Rear Wheel: Accuride 51487 22.5x8.25 steel Steel Armor[™] powder coat, hub-pilot mount, 7400lb. maximum rating, 5-hand hole. Air disc brake compatible. Code is priced per pair of wheels.	0
5853906	O	Powder coat white steel wheel. Use in conjunction with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0
5900008	O	Rear Wheel/Rim Quantity: 8	0

Price Level: January 1, 2022

Deal: T480 Straight Trk

Printed On: 8/29/2022 9:16:48 AM

Date: August 29, 2022

Quote Number: QUO-897304-N2N3V8

Sales Code	Std/Opt	Description	Weight
Frame & Equipment			
6054410	O	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to 309 in. to 380 in. Truck frame weight is 2.91 lb.-in. per pair of rails. Section modulus is 14.80 cu.in., RBM is 1,776,000 in.-lbs per rail. 120,000 PSI yield. Heat treated. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	254
6141600	O	Full Steel Insert: for 10-5/8 in. or 10-3/4 in. Steel 337 in. to 416 in. or 2nd insert for 11-5/8 in. steel frame. Adds 1,149,000 in.-lb to main rail RBM. Truck insert weight is 2.05 lb.-in. per pair of rails. Full frame insert length is equal to wheelbase plus rear frame cutoff plus dimension forward of front axle by model: T660, T680, T800, T880 = 21.26 in.; C500B = bumper setting minus 0.79 in.; W900B = 5.27 in., W900L = 1.50 in., W900S = 3.27 in.; T440/T470 50 in. bumper setting = 21.26 in., T470 73 in. bumper setting = 72.3 in.	727
6302461	O	Bumper: Tapered chrome steel channel. Requires a bumper setting code.	65
6319040	S	40 in. Bumper setting. Requires a bumper code.	0
6321010	S	Front tow loops: Two	0
6340040	O	Rear Engine PTO: PX-9, ISL9 Torque Capacity 435 lb-ft continuous, Drive ratio 1.15:1. Includes access provision in toe board.	150
6391201	O	Custom Frame Layout: one chassis CFL A/D: clear of back of cab between rails CFL A/T: clear of boc between rails	0
6405000	O	In-cab steel battery box: under rider seat or in stand alone box. Requires appropriate AGM battery code, which varies by model, and appropriate rider seat code be selected prior to entering the workscreen. Includes 1 battery disconnect switch.	0
6409906	O	In-Cab battery box location: Under rider seat.	0
6451125	S	DPF/SCR box natural end plates and natural cover.	0
6490139	S	Heavy-duty one-pc aluminum intermediate/fill-in crossmember.	0
6490433	S	Heavy-duty 5-piece rear cab support, hucked assembly. Huck fastened to frame.	0
6679821	U	2021 SERIES EMISSIONS ENGINE <i>Narr 2021 SERIES EMISSIONS ENGINE</i>	0
6679995	O	Customer will install structural end-of-frame crossmember before vehicle is placed in service.	0
6721102	S	Rear mudflap arms: Betts B-25 standard-duty, straight. Includes B1732 mounting brackets as standard.	0
6722000	S	Rear mudflap shields: White plastic antisail w/	0



Sales Code	Std/Opt	Description	Weight
		Kenworth logo.	
6742009	S	Square end-of-frame w/o crossmember; non-towing.	0
Fuel Tanks & Equip			
7140050	S	50 US gallon D-Shape rectangular aluminum under fuel tank, replace. With non-slip step.	22
7722170	S	Small DEF tank, 5.5 gallons.	0
7889203	O	DEF to fuel fill ratio 2:1 or greater.	0
7889245	O	Anti-siphon device in fuel tank filler neck. For any number of fuel tanks.	1
7889606	S	DEF tank location is LH under cab.	0
7920050	S	Location: 50 gal fuel tank LH under cab	0
Cab & Equipment			
8024311	S	Cab: Stamped aluminum with curved windshield LED markers. Requires separate roof code.	0
8090155	O	Hood: Med Aero w/ Chrome Crown	0
8108002	O	Fine particulate filter for cabin air HVAC system. To provide extra filtration in high dust applications. Cabin airflow is reduced with this additional filter. *Cannot be used with code 8108003.	0
8108011	S	Cab HVAC - Day Cab and 40in Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0
8201013	S	Steering wheel: 18 in. 4-spoke.	0
8201200	S	Adjustable telescoping tilt steering column.	0
8203060	O	5 sets of keys. Replaces standard 2 sets of keys.	0
8205164	O	Dash Switch: 1st Single-Acting Eaton or PACCAR Mounted PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	0
8208496	O	Three spare switches: Wired to power.	0
8222413	O	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0
8222414	O	Gauge: DD Virtual Gauge - Engine Percent	0

Price Level: January 1, 2022

Deal: T480 Straight Trk

Printed On: 8/29/2022 9:16:48 AM

Date: August 29, 2022

Quote Number: QUO-897304-N2N3V8



Sales Code	Std/Opt	Description	Weight
		Torque	
8222418	O	Gauge: DD Virtual Gauge - Engine Hours Instrument Cluster	0
8222419	O	Gauge: DD Virtual Gauge - Volts Instrument Cluster	0
8282024	S	Main Instrument Package: 7" Digital Display Cluster. Includes Physical (Analog): Speedometer, Tachometer, Oil Pressure, and Coolant Temp; and Digital: Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Volts Telltale, OAT and Primary Air Pressure, Secondary Air Pressure, and Air Application for air brake trucks.	0
8330591	S	Interior Trim Package: 2.1M MD Gray Foam Backing/Cloth Headliner W/Gray Sunvisor & Seat Color Three Underdash Center Console Cupholders (Two If Allison Transmission Is Selected).	0
8410102	O	Driver Seat: KW Air Seat HB Vinyl w/o Armrests w/ Susp Cover	0
8450101	O	Rider Seat: KW Battery Box Seat IB Vinyl w/o Armrests	0
8496559	O	Driver and Rider Seat Belts: Orange Seat Belts. Replacing standard color.	0
8570011	O	Low Profile Roof Interior Overhead Storage	0
8601432	O	Kenworth Radio DEA710 AM/FM/WB/USB, Bluetooth	0
8698965	O	Speaker Package For Cab: (2) Speakers B-Pillar	0
8699933	O	CB Installation Kit: C/I Center Mtd of Header w/ Dual Antenna on LH/RH mirrors. One Jumper Harness.	2
8700161	O	Footwell Light: Red Lens & Switch	0
8700196	S	Turn Signal: Self-Cancelling	0
8700283	S	LH and RH Trip Ledge Rain Deflectors	0
8700501	O	Metal Int Door Panel Kick Plates	0
8800372	O	Grabhandle: LH, Exterior, Side of Cab - Ergonomic Grab Handle Mounted To The Left Hand Exterior Of The Cab For Entry and Exit.	3
8800402	S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0
8832113	S	Kenworth Daylite Door with standard LH/RH electric door locks and LH/RH electric window controls.	0
8841411	S	Single air horn under cab.	0



Sales Code	Std/Opt	Description	Weight
8850139	S	Look-Down, Pass. Door, Black 11x6	0
8850842	S	Mirror Shell: Dual Aero In-Mold Black	0
8860852	O	Mirror: Dual KW Aero Rear View Motor, heated with Integral CX.	0
8871446	S	Rear cab stationary window 19in x 36in	0
8890038	O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	0
8890101	S	One-piece bonded-in windshield with curved glass. Standard.	0
8890874	O	Kenworth Cab Air Suspension.	0
8891012	S	Roof: Low Profile Stamped Steel	0
Lights & Instruments			
9010803	S	Headlamps: Single Halogen Complex Reflector w/ Turn Indicator, Reflector and DRL. Fender Mtd.	0
9022137	S	Marker Lights: Five, rectangular, LED	0
9030052	S	LED Stop,Turn,Tail: With Two LED Backup Lights and With An LED License Plate.	0
9090052	O	Brake Lights on when Engine Brake Active. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0
9090115	O	Reflectors: Two Midframe	0
9090180	O	Backup alarm: Tail light bracket mounted variable self-adjusting 82-102 DBA.	0
9090849	O	Polyswitches replacing fuses. Switch will automatically reset after removal of excess load.	0
Air Equipment			
9101218	S	Air Dryer: Bendix AD-HF Puraguard Heated	0
9108001	S	Moisture ejection valve w/ pull cable drain.	0
9140020	S	Nylon air tubing in frame & cab, excluding hoses subject to excessive heat or flexing.	0
9140248	O	Locate air dryer under LH rail BOC This code requires the use of a custom frame layout code.	0
Extended Warranty			
9200008	S	Base Warranty - PACCAR PX-9 Engine 24 months / 250,000 miles / 402,336 km / 6250 hours.	0
9200021	U	Base Warranty - Standard Service Heavy Duty	0



Sales Code	Std/Opt	Description	Weight
9200022	O	Base Warranty - Standard Service Medium Duty 12 months / Unlimited miles & km	0
9201828	O	EW: US Basic Vehicle 5 year/100,000 miles, United States only.	0
9208547	O	PACCAR EW: PX-9 Protect Plan 1 EPA21 5YR/100K (160,935KM). Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	0
9208559	O	PACCAR EW: Aftertreatment PX-9 Use W/ PP1 EPA21 5YR/100K (160,935KM). Each code registered between 366 and 546 days after the vehicles in-service date will be subject to a \$400 late fee. Coverage cannot be added after 200K MI or 545 days past the in-service date.	0
9210349	U	PROGRAM MIN LIST PRICE \$500 SURCHARGE <i>Narr PROGRAM MIN LIST PRICE \$500 SURCHARGE</i>	0
9220001	O	Base Warranty: Emissions 5YR/100K MI - EPA Engine (Does not include CARB Clean Idle sticker)	0
Miscellaneous			
9407014	U	PREPAID FREIGHT ADJUSTMENT <i>Narr PREPAID FREIGHT ADJUSTMENT</i>	0
9409852	O	GHG Secondary Manufacturer: Does Not Apply	0
9490206	O	Warning triangle reflector kit: Shipped loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	4
9490404	O	One 5 lb. dry chemical type fire extinguisher mounted outboard of driver seat. Class ABC.	11
9491659	S	VMUX Architecture	0
Promotions			
9510833	U	TC561 Q3 2022 MD SALES PROGRAM <i>Narr TC561 Q3 2022 MD SALES PROGRAM</i>	0
Paint			
9700000	O	Paint color number(s). N9702 A - L0436 SIERRA BLUE N9720 FRAME N0001 BLACK	0
9943004	S	Bumper Unpainted	0
9943050	S	Day Cab Standard Paint	0
9944820	S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0

Price Level: January 1, 2022

Deal: T480 Straight Trk

Printed On: 8/29/2022 9:16:48 AM

Date: August 29, 2022

Quote Number: QUO-897304-N2N3V8



<i>Sales Code</i>	<i>Std/ Opt</i>	<i>Description</i>	<i>Weight</i>
-----------------------	---------------------	--------------------	---------------

Order Comments



Total Weight

14,775

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Price Level: January 1, 2022


Deal: T480 Straight Trk

Printed On: 8/29/2022 9:16:48 AM

Date: August 29, 2022

Quote Number: QUO-897304-N2N3V8

HORIZONTAL DIMENSIONS

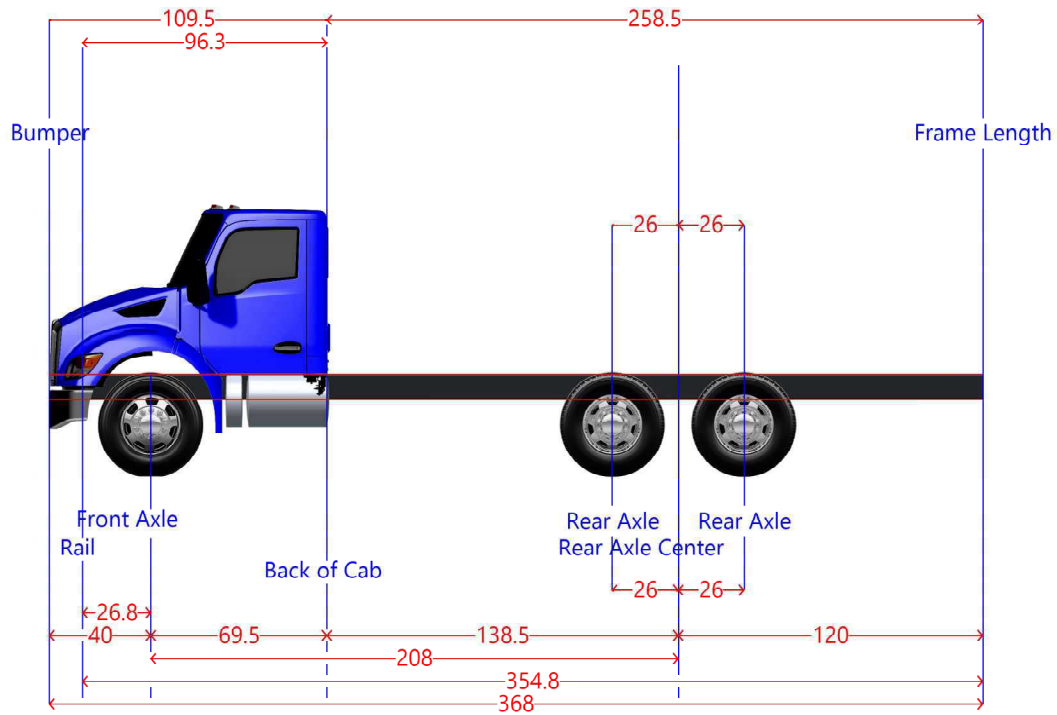

Dimension	Measurement	Start	End
Axle Spacing	52	182	234
Bumper to Back of Cab	109.5	-40	69.5
Bumper to Front Axle	40.0	-40	0
Bumper to Front Frame	13.2	-40	-26.8
Cab to End of Frame	258.5	69.5	328
Cab to Rear Axle	138.5	69.5	208
Effective Bumper to Back Of Cab	109.5	-40	69.5
Frame Length	354.8	-26.8	328
Front Axle to Back of Cab	69.5	0	69.5
Front of Frame to Axle	26.8	-26.8	0
Load Space	258.5	69.5	328
Overall Length	368.0	-40	328
Overhang	120.0	208	328
Pusher Offset #1	26.0	182	208
Pusher Offset #2	26.0	182	208
Pusher Offset #3	26.0	182	208
Tag Offset	26.0	208	234
Wheelbase	208	0	208

FRAME LAYOUT



Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

Selected Options (Wheelbase: 208)

Sales Code	Description	Length	Side
7140050	50 US gallon D-Shape rectangular aluminum under	32.7	Left
7722170	Small DEF tank, 5.5 gallons.	6.6	Left
6405000	In-cab steel battery box: under rider seat or in	20	Center

CERTIFICATE OF INTERESTED PARTIES

FORM 1295

1 of 1

Complete Nos. 1 - 4 and 6 if there are interested parties.
 Complete Nos. 1, 2, 3, 5, and 6 if there are no interested parties.

**OFFICE USE ONLY
 CERTIFICATION OF FILING**

1 Name of business entity filing form, and the city, state and country of the business entity's place of business.
 Cleveland Mack Sales, Inc
 CLEVELAND, TX United States

Certificate Number:
 2022-930257

Date Filed:
 09/06/2022

2 Name of governmental entity or state agency that is a party to the contract for which the form is being filed.
 Fort Bend County

Date Acknowledged:
 09/13/2022

3 Provide the identification number used by the governmental entity or state agency to track or identify the contract, and provide a description of the services, goods, or other property to be provided under the contract.
 QUO-897304-N2N3V8
 Purchase of New Kenworth T480

4	Name of Interested Party	City, State, Country (place of business)	Nature of interest (check applicable)	
			Controlling	Intermediary
	Martin, Skip	Cleveland, TX United States	X	
	Sweeten, RC	Cleveleand, TX United States	X	
	Yeager, Dayne	Cleveland , TX United States	X	

5 Check only if there is NO Interested Party.

6 UNSWORN DECLARATION

My name is _____, and my date of birth is _____.

My address is _____, _____, _____, _____, _____.
(street) (city) (state) (zip code) (country)

I declare under penalty of perjury that the foregoing is true and correct.

Executed in _____ County, State of _____, on the _____ day of _____, 20____.
(month) (year)

 Signature of authorized agent of contracting business entity
 (Declarant)